

DW8601X



Product Family	Dishwashers
Commercial height	STANDARD HEIGHT
Installation	Under counter built-in
Kitchen panel	Not supplied
N° baskets	2
Motor	Inverter
EAN code	8017709363451
UPC Code	812895027747




Programs



N. of programmes	8	Super	Yes
Washing temperatures	45, 50, 55, 65 °F	Regular	Yes
Light soiling	Yes	Intensive 65°	Yes
Delicate	Yes	Intensive 70°	Yes
Auto	Yes	Rinse	Yes

Options



Hi-Temp	Yes	Delay timer option	Up to 24 hours
Extra Fast	Yes	Extra dry option	Yes
Sanitize	Yes	1/2 load FlexiZone option	Yes
Silent	Yes	Sanitizing option Hyclean	Yes

Baskets

Basket colour	Grey	Height adjustment of the upper basket	On two levels (5cm)
Basket components colour	Grey	Lower Basket	With 4 foldable racks
Handle	In plastic on upper and lower basket	Colour Inner Components	Grey
Upper Basket	With 2 foldable racks	Cutlery basket	Yes


Technical Features







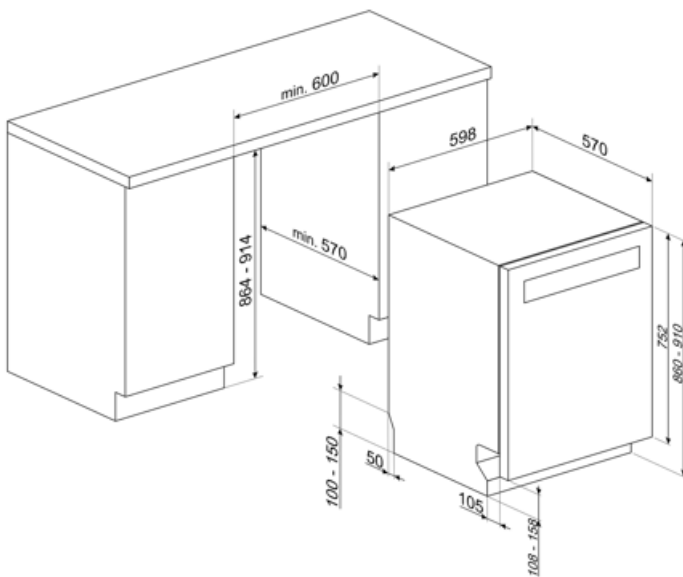











Width (mm)	23 9/16 "	Turbidity sensor	Yes
Depth (mm)	22 7/16 "	Aquatest	
Display type	LED display (3 digit)	Flood protection system	Single Acquastop
Product Height (mm)	33 7/8 "	Drying system	Natural condenser drying
Controls	Electronic	Tube material	Stainless steel
Display	Delayed start, Programme time indicator	Filter	Stainless steel
Programme graphics	Written in EN	Concealed heating element	Yes
On/off indicator	Yes	Can be installed in-column	Yes
Rinse aid indicator	Light	Adjustable feet	5cm, from 820 to 870 mm
End of cycle indicator	On display, with acoustic signal	Airborne acoustical noise emissions dBA	45 dBA
Washing system	Standard	Back feet adjustable from front	Yes
		Energy Star	Yes

Electrical Connection

Connected power	1400 W	Type of connection	Single-phase
Current	12 A	Power supply cable length	116 "
Voltage	120 V	Plug	(B) NEMA 5-15P
Frequency (Hz)	60 Hz		



Symbols glossary

 <p>Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.</p>	 <p>The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.</p>
 <p>Installation in column: Installation in column</p>	 <p>Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.</p>
 <p>FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.</p>	 <p>Hyclean: When the HYCLEAN option is selected, the dishwasher performs a final 10 minute rinse at a high temperature of 70°C, eliminating virtually all bacteria to achieve the highest possible standards of cleanliness. The Hyclean option can be selected with almost all cycles at temperatures above 50°C.</p>
 <p>Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.</p>	 <p>Noise Level: Excellent insulation and special devices keep noise to a minimum.</p>
 <p>EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.</p>	 <p>Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.</p>
 <p>Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.</p>	 <p>LIGHT SOILING Washing programme with low water and energy consumption.</p>
 <p>The Regular programme is for dishes with regular dirt, even with dried-on residues.</p>	 <p>PRG_RINSE_72dpi</p>
 <p>PRG_STRONG_72dpi</p>	 <p>14 place settings: Number of place settings.</p>