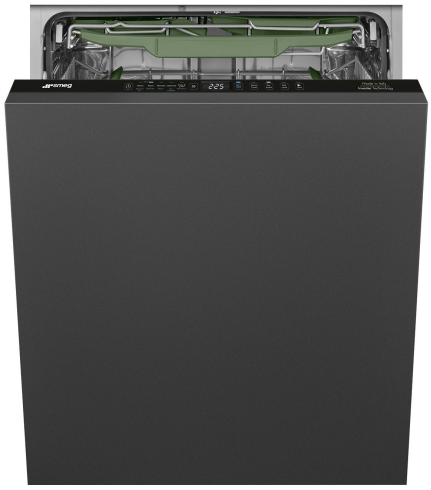
# DW8620



| | |
|---|---|
| **Product Family** | Dishwashers |
| **Commercial height** | STANDARD HEIGHT |
| **Installation** | Fully-integrated built-in |
| **N° baskets** | 3, FlexiDuo |
| **Motor** | Inverter |
| **EAN code** | 8017709354855 |

## Programs

| | | | |
|---|---|---|---|
| **N. of programmes** | 10 | **Delicate** | Yes |
| **Washing temperatures** | 38, 45, 50, 55, 65, 70, 75 °F | **Normal** | Yes |
| **Express 27'** | Yes | **Rinse** | Yes |
| **Auto sensor 45-65** | Yes | **Eco express** | Yes |
| **Intense** | Yes | **Pots & Pans** | Yes |
| **Self clean** | Yes | | |

## Options

| | | | |
|---|---|---|---|
| **Dry Assist+ option** | Yes | **1/2 load FlexiZone option** | Yes |
| **Delay timer option** | Up to 24 hours | **Special programs option** | Yes |

## Baskets

| | | | |
|---|---|---|---|
| **Basket colour** | Grey | **Lower Basket** | With 2 foldable racks |
| **Upper Basket** | With 1 foldable rack | **Lower basket accessories** | MultiLoad |
| **Height adjustment of the upper basket** | On three levels (5 cm) | **Lower basket with anti-drip inserts** | Yes |
| **Sliding Guides Extra Glide** | Yes | **Colour Inner Components** | Sage Leaf |
| **Largest loadable dish in upper basket** | 19,0 inches | **Cutlery basket** | Yes |

## Technical Features



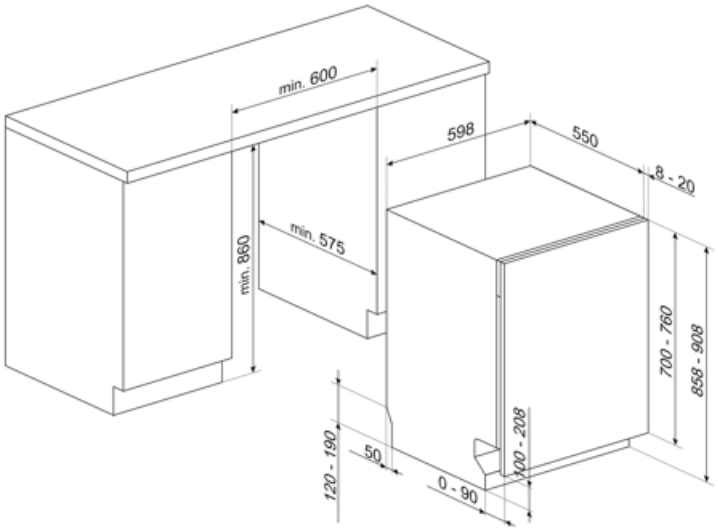

| | |
|---|---|
| **Width (mm)** | 23 9/16 " |
| **Depth (mm)** | 21 5/8 " |
| **Display type** | LED display (3 digit) |
| **Product Height (mm)** | 33 3/4 " |
| **Display** | Delayed start, Programme time indicator |
| **Programme graphics** | Written in EN |
| **On/off indicator** | Yes |
| **Salt light indicator** | Light |
| **Rinse aid indicator** | Light |
| **End of cycle indicator** | ActiveLight |
| **Auto switch-off** | Yes |
| **Washing system** | Orbital |
| **Third spray arm** | Single |
| **Water softener** | With electronic setting |
| **Turbidity sensor Aquatest** | Yes |
| **Flood protection system** | Single Acquastop |

| | |
|---|---|
| **Max water hardness** | 100°fH;58°dH |
| **Drying system** | Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle |
| **Steam protection** | Metallic sheet |
| **Tub material** | Stainless steel |
| **Filter** | Stainless steel |
| **Concealed heating element** | Yes |
| **Hinges** | Self balancing, Sliding, FLEXIFIT |
| **Min. and max. frontal panel weight** | 2 - 11 lbs |
| **Min. and max plinth height** | 50 - 215 mm |
| **Adjustable feet** | 7cm, from 860 to 930 mm |
| **Airborne acoustical noise emissions dBA** | 40 dBA |
| **Additional gaskets** | Yes |
| **Back cover** | Yes |
| **Depth of dishwasher with open door (mm)** | 1186 mm |
| **Top cover** | Metallic sheet |
| **Energy Star** | Yes |

## Electrical Connection

| | |
|---|---|
| **Connected power** | 1100 W |
| **Current** | 13 A |
| **Voltage** | 115 V |
| **Frequency (Hz)** | 60 Hz |

| | |
|---|---|
| **Type of connection** | Single-phase |
| **Power supply cable length** | 140 " |
| **Plug** | (B) NEMA 5-15P |


min. 600
598
550
8 - 20
min. 575
min. 860
700 - 760
858 - 908
120 - 190
50
0 - 90
100 - 208

## Compatible Accessories



**KIT86SPRAN**



**KIT86SPRMW**



**KIT86SPRX**

**KITFLEXI**



**KITJBDW**



**KITPL60B**

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



**KITPL60N**

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

**KITPL60X**

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.





**KITPLV2**

Kit extension for dishwasher and washing machine: lenght mt. 2



# Symbols glossary




Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.




The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.




The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.



The ExtraGlide guides system makes the second basket run even smoother and softer. It facilitates movement even when fully loaded, and thanks to the increased excursion, facilitates the insertion of dishes into the basket.




Noise Level: Excellent insulation and special devices keep noise to a minimum.




Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



PRG_RINSE_72dpi




Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.




System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



SILENT: Wash cycle suitable for normally soiled dishes, even with dried-on residues. Ensures maximum noise reduction and is therefore ideal if you wish to run it during the night.




Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



To improve the drying of dishes without leaving stains.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.




FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.




Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.




Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.




Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.




15 place settings: Number of place settings.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Allows you to enable additional programs when selected together with any wash cycle.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.