

DW8620



Product family Width Commercial height Installation N° baskets Engine EAN code Dishwashers 24" 86 cm Fully-integrated built-in 3, FlexiDuo Inverter 8017709354855



Programs

27min 45°-65° 70° 150°			
Number of programs	10	Delicates	Yes
Washing temperatures	38, 45, 50, 55, 65, 70, 75 °F	Normal	Yes
Express 27'	Yes	Rinse	Yes
Automatic	Yes	Eco express	Yes
Intense	Yes	Pots & Pans	Yes
Self Clean	Yes		

Options



Dry Assist+ option Delay start Yes Up to 24 hours FlexiZone half-loadYesoptionSpecial programs optionYes

Baskets

Basket color	Gray	Lower basket	With 2 foldable racks
Upper basket	1 foldable rack	Lower basket	MultiLoad
Upper basket height	On 3 levels	accessories	
adjustment		Lower basket with anti-	Yes
Sliding Guides Extra	Yes	drip inserts	
Glide		Colour Inner	Sage Leaf
Largest loadable dish in	19,0 inches	Components	
upper basket		Cutlery basket	Yes



Technical Features

ACTIVE CRATAL UIGHT ORATAL SYSTEM AGUARDS FLEXI AGUARDS FIT			
Width	23 9/16 "	Flood protection system	Single Aquastop
Depth	21 5/8 "	Max water hardness	100°fH;58°dH
Display type	LED display (3 digits)	Drying system	Natural condenser drying,
Height	33 3/4 "		with Dry Assist + automatic
Display	Delay start, Program progress indicator		door opening system at the end of the cycle
Program symbols	Writings in English	Tub material	Stainless steel
On/off indicator	Yes	Filter	Stainless steel
Salt indicator	Light	Concealed heating element	Yes
Rinse aid indicator	Light	Hinges	Self-balancing, Sliding,
End-of-cycle indicator	ActiveLight	iniges	FLEXIFIT
Washing system	Orbital	Min. and max. frontal	4.4 - 24.3 lbs
Third spray arm	Single	panel weight	
Water softener	With electronic setting	Min. and max plinth	50 - 215 mm
Turbidity sensor	Yes	height	
Aquatest		Adjustable feet	2 3/4", from 33 7/8" to 36 5/8"
		Additional gaskets	Yes

Back cover

Top cover

Depth of dishwasher

with open door (mm)

Yes


1186

Metal sheet

Electrical Connection

Plug	(B) NEMA 5-15P	Frequency (Hz)	60 Hz
Connected power	1100 W	Connection type	Single-phase
Current	13 A	Power supply cable	140 "
Voltage	115 V	length	



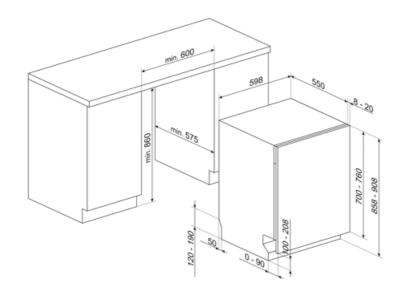



Compatible Accessories




KIT86CX-1

Door kit, stainless steel, Canali handle, fully integrated dishwasher h.86 cm Compatible with models with Flexifit and fixed fulcrum hinges.



KIT86PORTWH-1





KIT86SPRAN

KIT86SPRX





KITJBDW

KIT86PORTAN-1

KIT86PORTX-1

KIT86SPRMW



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.


KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2





Symbols glossary

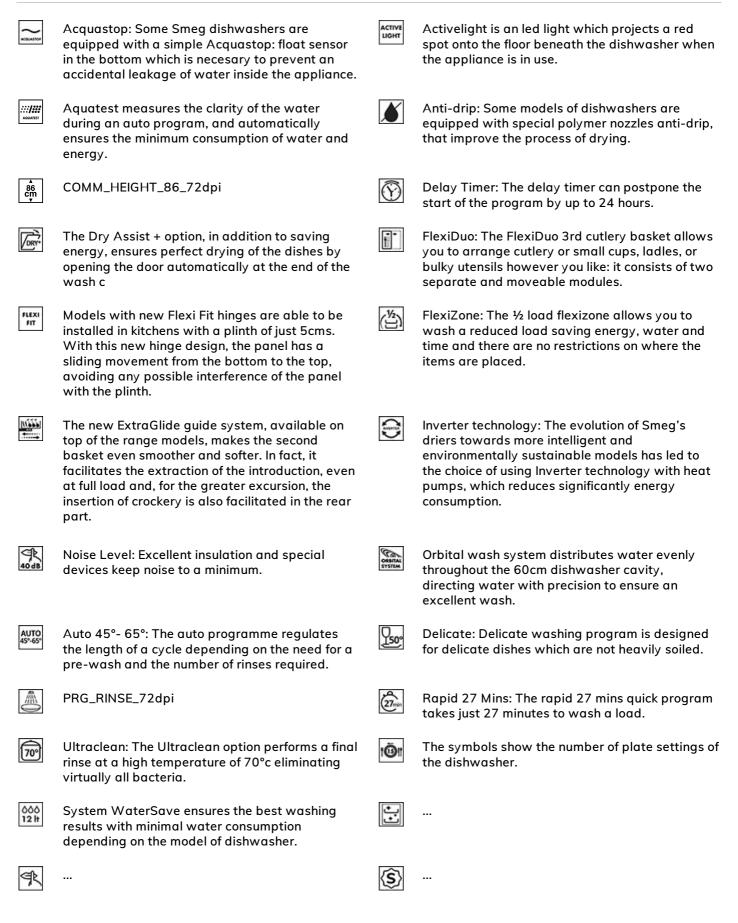



Benefit (TT)

Active Light

Maximum control thanks to the light projected on the floor that indicates when the dishwasher is running and when the cycle is complete

Smeg dishwashers equipped with ActiveLight signal the appliance's activity status by projecting a light on the floor while the cycle is running. The light goes out at the end of the cycle, signalling that the dishwasher can be unloaded.

FlexiDuo

The flexible third basket provides additional space, adapting to the load to accommodate various types of dishes, ensuring optimal organization and efficient use of interior capacity

The third FlexiDuo basket consists of two separate sections that can be handled independently of each other, stacked and/or removed, offering loading flexibility for every need. Depending on the arrangement, it allows cups, tall glasses, bulky utensils and pots and pans to be placed in the upper basket.

Orbital Wash System

Even water distribution, deep cleaning and low noise thanks to the dual rotating spray arms

Orbital washing system, which, thanks to its double arm, its 7 water exit points and thanks to overlapping and simultaneous rotations and 40 rotations per minute, allows ample coverage of the tank area, thus guaranteeing optimal results in any basket-loading configuration.

Flexifit hinge system

Smooth-running door for optimal integration into the kitchen deisgn

The height of the plinth can vary from 5 cm to 21.5 cm, allowing it to fit perfectly into the cabinet. Thanks to this solution, the dishwasher blends harmoniously into its surroundings, with the door and plinth perfectly aligned with the other kitchen furniture.

Extra Glide Telescopic Guides

Smoother and more stable loading and unloading operations

Extra Glide telescopic guides ensure smooth and safe extraction of the upper basket, even with heavy loads. The telescopic design ensures smooth, stable and silent movement, improving ergonomics and convenience. Ideal for optimising space and ease of use, they combine durability and comfort in every washing operation.

DryAssist+

The Dry Assist+ system of automatic door opening at the end of the cycle ensures fast and energy-efficient drying