

DW9QSDXSA-1



| | |
|-------------------|---------------|
| Product Family | Dishwashers |
| Commercial width | 60 cm |
| Commercial height | 85 cm |
| Installation | Free-standing |
| N° baskets | 3, FlexiDuo |
| Motor | Single phase |
| EAN code | 8017709274078 |



Programs



| | | | |
|---------------------------|-----------------------|--------------------|-----|
| N. of programmes | 10+1 | Mix | Yes |
| Washing temperatures | 38, 45, 50, 65, 70 °C | Quiet (~2 dB) | Yes |
| Soak | Yes | Intense | Yes |
| Rapid 27' | | Self clean | Yes |
| Express 27' | Yes | Hygiene 99,9% | Yes |
| Glass | | ECO Quick | |
| Crystal | Yes | Delicate and Quick | |
| Full express - 60 minutes | Yes | Normal Quick | |
| ECO | Yes | Strong and fast | |
| Auto sensor 45-65 | Yes | Super | |

Options



| | | | |
|---------------------------|----------------|-------------------------|-----|
| Enersave option | | Options for tabs | |
| Dry Assist+ option | Yes | FlexiTabs | |
| Delay timer option | Up to 24 hours | Quick Time option | |
| 1/2 load FlexiZone option | Yes | Sanitizing option | |
| | | Hyclean | |
| | | Special programs option | Yes |

Baskets



| | | | |
|--|--|--|-----------------------|
| Basket colour | Grey | Largest loadable dish in upper basket | 19,0 cm |
| Basket components colour | Grey | Lower Basket | With 4 foldable racks |
| Handle | In plastic with stainless steel insert on upper and lower basket | Lower basket with anti-drip inserts | Yes |
| Upper Basket | With 3 foldable racks | Largest loadable dish in lower basket | 30,0 cm |
| Height adjustment of the upper basket | On three levels (5 cm) | Colour Inner Components | Blue |
| Sliding Guides Extra Glide | Yes | | |


Technical Features




| | | | |
|-------------------------------|---|--|---|
| Width (mm) | 598 mm | Turbidity sensor | Yes |
| Depth (mm) | 600 mm | Aquatest | |
| Display type | LED display (3 digit) | Flood protection system | Total Acquastop |
| Product Height (mm) | 848 mm | Water supply | Single; cold/hot water max. 60°C - energysave with hot water up to 35% |
| Controls | Electronic | Max water hardness | 100°FH;58°dH |
| Display | Delayed start, Programme time indicator | Drying system | Natural condenser drying, with EnerSave automatic door opening system at the end of the cycle |
| Programme graphics | Symbols and label | Tub material | Stainless steel |
| On/off indicator | Yes | Filter | Stainless steel |
| Salt light indicator | Light | Concealed heating element | Yes |
| Rinse aid indicator | Light | Hinges | Self balancing with fixed hinges |
| End of cycle indicator | Acoustic signal | Adjustable feet | Just for levelling |
| Washing system | Planetarium | Back cover | Yes, with covered counterweight |
| Third spray arm | Single | Depth of dishwasher with open door (mm) | 1168 |
| Water softener | With electronic setting | Removable top | Yes, with optional KIT |

Electrical Connection

| | | | |
|------------------------|----------------|----------------------------------|--------------|
| Plug | (M) Sud Africa | Frequency (Hz) | 50 Hz |
| Connected power | 1800 W | Type of connection | Single-phase |
| Current | 13 A | Power supply cable length | 140 cm |
| Voltage | 220-240 V | | |

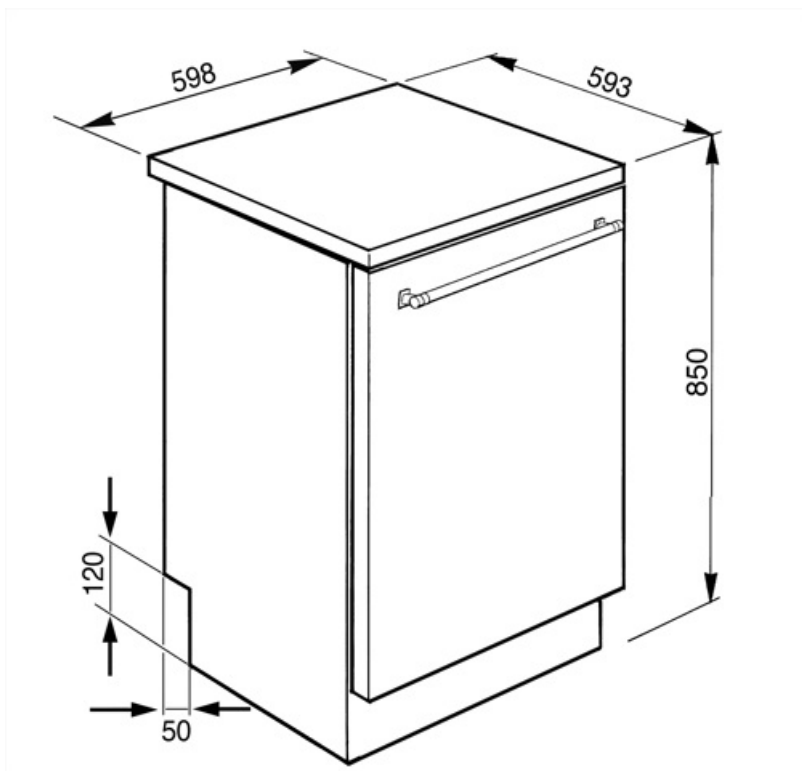


Not included accessories



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks























KITINC



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary

| | | |
|--|---|---|
|  | |  <p>The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.</p> |
|  <p>To improve the drying of dishes without leaving stains.</p> |  <p>Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.</p> | |
|  <p>FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.</p> |  <p>FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.</p> | |
|  <p>The ExtraGlide guides system makes the second basket run even smoother and softer. It facilitates movement even when fully loaded, and thanks to the increased excursion, facilitates the insertion of dishes into the basket.</p> |  <p>Noise Level: Excellent insulation and special devices keep noise to a minimum.</p> | |
|  <p>The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.</p> |  <p>Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.</p> | |
|  <p>Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.</p> |  <p>Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.</p> | |
|  <p>Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.</p> |  <p>Soak programme: The soak programme provides a rinse to prevent dirt from drying.</p> | |
|  <p>Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.</p> |  <p>Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°C eliminating virtually all bacteria.</p> | |
|  <p>14 place settings: Number of place settings.</p> |  <p>Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.</p> | |
|  <p>System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.</p> |  <p>Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.</p> | |



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.



SILENT: Wash cycle suitable for normally soiled dishes, even with dried-on residues. Ensures maximum noise reduction and is therefore ideal if you wish to run it during the night.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.