

DWA6214S4

| | |
|-------------------|---------------|
| Product Family | Dishwashers |
| Commercial width | 60 cm |
| Commercial height | 85 cm |
| N° baskets | 2 |
| Motor | Single phase |
| EAN code | 8017709341732 |



Programs



| | | | |
|---------------------------|---------------------------|---------------|-----|
| N. of programmes | 5 | Mix | Yes |
| Washing temperatures | 45, 50, 55, 65, 70, 75 °C | Hygiene 99,9% | Yes |
| Crystal | Yes | Normal ECO | Yes |
| Full express - 60 minutes | Si | | |

Options



| | | | |
|--------------------|-----|--------------------|-------------|
| Dry Assist+ option | Yes | Delay timer option | 3-6-9 hours |
|--------------------|-----|--------------------|-------------|

Baskets

| | | | |
|---------------------------------------|--------------------------------------|---------------------------------------|--|
| Basket colour | Grey | Lower Basket | With 2 foldable racks |
| Basket components colour | Grey | Lower basket with anti-drip inserts | Yes, as an accessory |
| Handle | In plastic on upper and lower basket | Largest loadable dish in lower basket | 30,0 cm |
| Upper Basket | With central fixed racks | Colour Inner Components | Grey handles, Grey pastic plate for regulation second basket on three levels, Grey Orbital |
| Height adjustment of the upper basket | On three levels | Cutlery basket | 13 place settings sliding |
| Largest loadable dish in upper basket | 25,0 cm | | |

Technical Features




| | |
|-------------------------|--|
| Width (mm) | 598 mm |
| Depth (mm) | 600 mm |
| Product Height (mm) | 848 mm |
| Controls | Electronic |
| Programme graphics | Symbols |
| On/off indicator | Yes |
| Rinse aid indicator | Light |
| End of cycle indicator | Led on display, with acoustic signal |
| Washing system | Orbital |
| Third spray arm | Single |
| Flood protection system | Total Acquastop |
| Water supply | Single; cold/hot water max. 60°C - energysave with hot water up to 35% |

| | |
|---|---|
| Max water hardness | 100°FH;58°dH |
| Drying system | Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle |
| Child safety system (door lock) | Yes |
| Tub material | Stainless steel |
| Filter | Stainless steel |
| Concealed heating element | Yes |
| Hinges | Self balancing with fixed hinges |
| Adjustable feet | Just for levelling |
| Back cover | Yes, with covered counterweight |
| Depth of dishwasher with open door (mm) | 1168 |
| Removable top | Yes, with optional KIT |

Electrical Connection

| | | | |
|-----------------|---------------|---------------------------|--------------|
| Plug | (I) Australia | Frequency (Hz) | 50 Hz |
| Connected power | 1800 W | Type of connection | Single-phase |
| Current | 10 A | Power supply cable length | 140 cm |
| Voltage | 220-240 V | | |

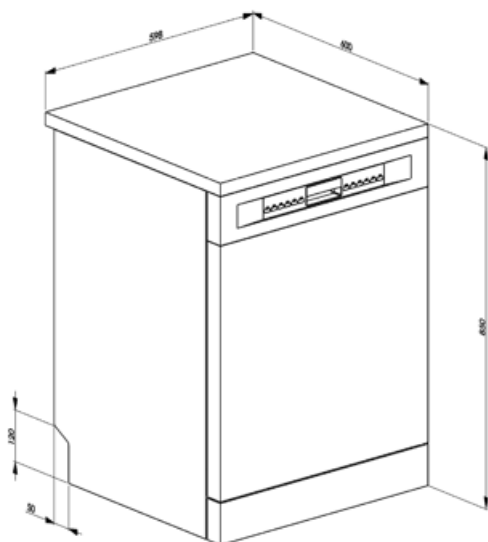

Compatible Accessories



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



KITPL60FABB














Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

Symbols glossary

| | | | |
|--|---|---|--|
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | Delay Timer: The delay timer can postpone the start of the program by up to 24 hours. |
|  | The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash cycle. |  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |
|  | Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash. |  | Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china. |
|  | Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use. |  | REF_PRG_NORMAL_ECO_72dpi |
|  | The symbols show the number of plate settings of the dishwasher. |  | Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary. |
|  | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher. |  | ... |
|  | HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising | | |

Benefit (TT)

Orbital Wash System

Even water distribution, deep cleaning and low noise thanks to the dual rotating spray arms

Orbital washing system, which, thanks to its double arm, its 7 water exit points and thanks to overlapping and simultaneous rotations and 40 rotations per minute, allows ample coverage of the tank area, thus guaranteeing optimal results in any basket-loading configuration.

DryAssist+

The Dry Assist+ system of automatic door opening at the end of the cycle ensures fast and energy-efficient drying