

# DWA6214W2

Product Family	Dishwashers
Commercial width	60 cm
Commercial height	85 cm
Installation	Free-standing
N° baskets	2
EAN code	8017709278823



## Programs



N. of programmes	5	Ultraclean	Yes
Washing temperatures	45, 55, 65, 70 °C	Intensive 65°	Yes
Soak	Yes	Normal ECO	Yes
ECO	Yes		

## Options



Delay timer option	3-6-9 hours	Options for tabs FlexiTabs	Yes
--------------------	-------------	----------------------------	-----

## Baskets



Basket colour	Grey	Lower Basket	With 2 foldable racks
Basket components colour	Grey	Lower basket with anti-drip inserts	Yes
Handle	In plastic on upper and lower basket	Largest loadable dish in lower basket	30,0 cm
Upper Basket	With central fixed racks	Colour Inner Components	Grey handles, Grey pastic plate for regulation second basket on three levels, Green Orbital
Height adjustment of the upper basket	On three levels	Cutlery basket	13 place settings sliding
Largest loadable dish in upper basket	25,0 cm		

## Technical Features




<b>Width (mm)</b>	598 mm
<b>Depth (mm)</b>	600 mm
<b>Product Height (mm)</b>	848 mm
<b>Controls</b>	Electronic
<b>Programme graphics</b>	Symbols
<b>On/off indicator</b>	Yes
<b>Rinse aid indicator</b>	Light
<b>End of cycle indicator</b>	Led on display, with acoustic signal
<b>Washing system</b>	Orbital
<b>Third spray arm</b>	Single
<b>Flood protection system</b>	Total Acquastop

<b>Water supply</b>	Single; cold/hot water max. 60°C - energysave with hot water up to 35%
<b>Max water hardness</b>	100°FH;58°dH
<b>Drying system</b>	Natural condenser drying
<b>Tub material</b>	Stainless steel
<b>Filter</b>	Stainless steel
<b>Concealed heating element</b>	Yes
<b>Hinges</b>	Self balancing with fixed hinges
<b>Adjustable feet</b>	Just for levelling
<b>Back cover</b>	Yes, with covered counterweight
<b>Depth of dishwasher with open door (mm)</b>	1168
<b>Removable top</b>	Yes, with optional KIT

## Electrical Connection


<b>Plug</b>	(I) Australia	<b>Frequency (Hz)</b>	50 Hz
<b>Connected power</b>	1800 W	<b>Type of connection</b>	Single-phase
<b>Current</b>	10 A	<b>Power supply cable length</b>	140 cm
<b>Voltage</b>	220-240 V		

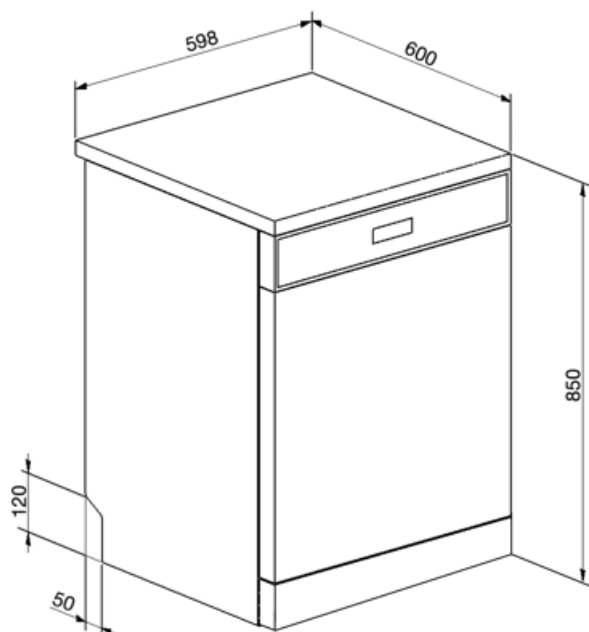

---

## Compatible Accessories

---



### KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



### KITINC












a steel bar fitted on the top will block the dishwasher at the top.



### KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

## Symbols glossary

	Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.		Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.
	Flexitabs: Flexitabs adjusts the wash cycle to give the best possible results regardless of the type of detergent used.		Noise Level: Excellent insulation and special devices keep noise to a minimum.
	Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.		Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.
	Soak programme: The soak programme provides a rinse to prevent dirt from drying.		REF_PRG_NORMAL_ECO_72dpi
	The symbols show the number of plate settings of the dishwasher.		Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.
	System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.		

---

## Benefit (TT)

---

### Orbital Wash System

Even water distribution, deep cleaning and low noise thanks to the dual rotating spray arms

Orbital washing system, which, thanks to its double arm, its 7 water exit points and thanks to overlapping and simultaneous rotations and 40 rotations per minute, allows ample coverage of the tank area, thus guaranteeing optimal results in any basket-loading configuration.