

DWAFI6314-2

82 cm **Product Family Commercial width Commercial height** Installation **Kitchen panel** N° baskets EAN code

Dishwashers 60 cm 82 cm Fully-integrated built-in Not supplied 3, Flexi 8017709278762



Programs

ECO 50° Eco 98 🕅			
N. of programmes	5+5 quick programmes	ECO Quick	Yes
Washing temperatures	38, 50, 55, 65, 70 °C	Delicate and Quick	Yes
Soak	Yes	Daily Quick	Yes
Rapid 27'	Yes	Strong and fast	Yes
ECO	Yes	Intensive 65°	Yes
Ultraclean	Yes	Normal ECO	Yes

Options

\odot			
Delay timer option	3-6-9 hours	Quick Time option	Yes

Baskets

Basket colour	Grey	Lower Basket	With 4 foldable racks
Basket components colour	Grey	Lower basket with anti- drip inserts	Yes
Handle	In plastic with stainless steel insert on upper and	Largest loadable dish in lower basket	30,0 cm
	lower basket	Colour Inner	Blue
Upper Basket	With central fixed racks	Components	
Height adjustment of the upper basket	On three levels	Cutlery basket	13 place settings sliding



Largest loadable dish in 19,0 cm upper basket

Technical Features

Width (mm)	598 mm	Steam protection	In plastic
Depth (mm)	570 mm	Tub material	Stainless steel
Product Height (mm)	818 mm	Filter	Stainless steel
Controls	Electronic	Concealed heating	Yes
Programme graphics	Symbols	element	
On/off indicator	Yes	Hinges	Self balancing with fixed
Rinse aid indicator	Light		hinges
End of cycle indicator	Acoustic signal	Min. and max. frontal panel weight	2 - 9 kg
Washing system	Orbital		100 - 228 mm
Third spray arm	Single	Min. and max plinth height	100 - 228 1111
Flood protection system	Total Acquastop	Adjustable feet	7cm. from 820 to 890 mm
Water supply	Single; cold/hot water max. 60°C - energysave with hot	Additional gaskets	Yes, with stainless steel plate
	water up to 35%	Back cover	Yes
Max water hardness Drying system	100°fH;58°dH Natural condenser drying	Depth of dishwasher with open door (mm)	1146
		Back feet adjustable from front	Yes

Electrical Connection

Plug Connected power Current Voltage (I) Australia 1800 W 10 A 220-240 V Frequency (Hz) Type of connection Power supply cable length

Top cover

50 Hz Single-phase 140 cm

In plastic



Compatible Accessories



KIT6CX

Classic aesthetics stainless steel panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2



KIT82CAN

Classic aesthetics anthracite panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.

KITPL60FABB


Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

•se•smeg

Symbols glossary

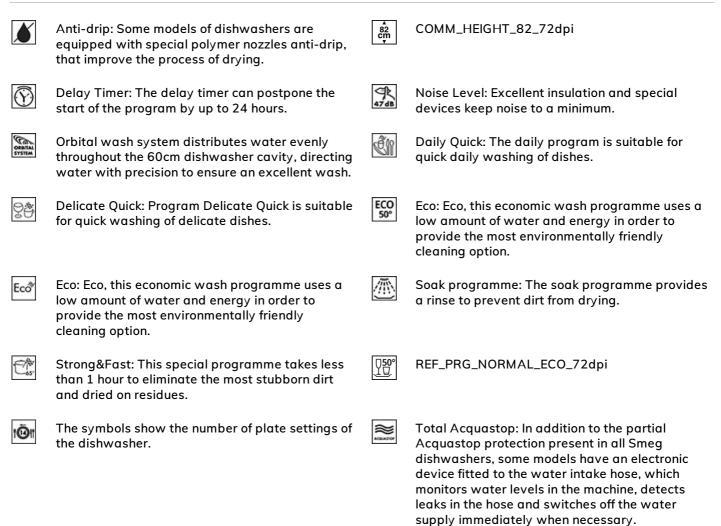

0	6	S It
00	6	5

System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Benefit (TT)

Orbital Wash System

Even water distribution, deep cleaning and low noise thanks to the dual rotating spray arms

Orbital washing system, which, thanks to its double arm, its 7 water exit points and thanks to overlapping and simultaneous rotations and 40 rotations per minute, allows ample coverage of the tank area, thus guaranteeing optimal results in any basket-loading configuration.