

DWAFI6D15T3



Product Family Commercial width Commercial height Installation Kitchen panel N° baskets Motor EAN code

Dishwashers 60 cm 86 cm Fully-integrated built-in Not supplied 3, FlexiDuo Inverter 8017709297138



Programs

(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	\$ 1 1		
N. of programmes	10	Auto sensor 45-65	Yes
Washing temperatures	38, 45, 50, 55, 65, 70, 75 °C	Quiet (-2 dB)	Yes
Soak	Yes	Intense	Yes
Express 27'	Yes	Sterilise	Yes
Crystal	Yes	Regular	Yes
Full express - 60 minutes	Yes	Normal ECO	Yes

Options



Dry Assist+ option Delay timer option 1/2 load FlexiZone option Yes Up to 24 hours Yes Options for tabs Yes FlexiTabs Special programs option Yes

Baskets

Basket colour Basket components colour Grey Grey Largest loadable dish in 19,0 cm upper basket Lower Basket With compl

With completely foldable racks and glass holder



Handle	In plastic with stainless steel insert on upper and lower basket
Upper Basket	With 3 foldable racks
Height adjustment of the upper basket	On three levels
Sliding Guides Extra Glide	Yes

Lower basket with antidrip inserts Largest loadable dish in 35,0 cm lower basket Colour Inner Blue Components Cutlery basket 13 place s

13 place settings sliding

Technical Features

Width (mm)	598 mm	Max water hardness	100°fH;58°dH
Depth (mm)	550 mm	Drying system	Natural condenser drying,
Display type	LED display		with Dry Assist + automatic
Product Height (mm)	858 mm		door opening system at the end of the cycle
Controls	Electronic	Steam protection	In plastic
Display	Delayed start	Child safety system	in plustic
Programme graphics	Symbols	(door lock)	
Salt light indicator	Light	Internal light	With White led
Rinse aid indicator	Light	Tub material	Stainless steel
End of cycle indicator	ActiveLight	Filter	Stainless steel
Washing system	Planetarium	Concealed heating	Yes
Third spray arm	Single	element	
Water softener	With electronic setting	Hinges	Self balancing with variable
Turbidity sensor	Yes		hinges
Aquatest		Min. and max. frontal	2 - 8 kg
Flood protection system	Total Acquastop	panel weight	400 000
Water supply	Single; cold/hot water max. 60°C - energysave with hot	Min. and max plinth height	100 - 228 mm
	water up to 35%	Adjustable feet	7cm, from 860 to 930 mm
		Additional gaskets	Yes, with stainless steel plate
		Back cover	Yes
		Depth of dishwasher with open door (mm)	1146

Electrical Connection

Plug Connected power Current Voltage (I) Australia 1800 W 10 A 220-240 V Frequency (Hz) Type of connection Power supply cable length


Back feet adjustable

from front

50 Hz Single-phase 140 cm

Yes



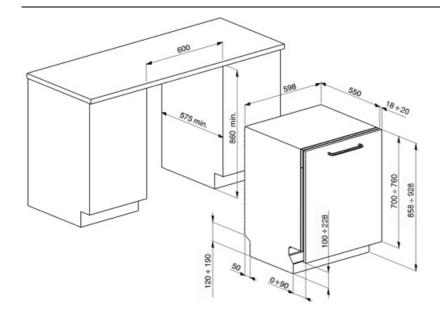



Compatible Accessories



KIT86VX

stainless steel panel with Victoria handle. Can be fittet on the fully integrated dishwashers H86 with no Flexifit hinges. It is not possible to install it on the models with stainless steel panel

KITPL60B



Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

•ss•smeg

Symbols glossary

|--|


Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.





FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Inverter technology: The evolution of Smeg's driers towards more intelligent and environmentally sustainable models has led to the choice of using Inverter technology with heat pumps, which reduces significantly energy consumption.



PLANETARIUM_WASHING_SYSTEM_72dpi



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



REF_PRG_NORMAL_ECO_72dpi



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary. Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



:::|:::

COMM_HEIGHT_86_72dpi



Fingerprint proof stainless steel: Fingerprint proof stainless steel keeps stainless steel looking as good as new.

Flexitabs: Flexitabs adjusts the wash cycle to give the best possible results regardless of the type of detergent used.



The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.




The symbols show the number of plate settings of the dishwasher.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



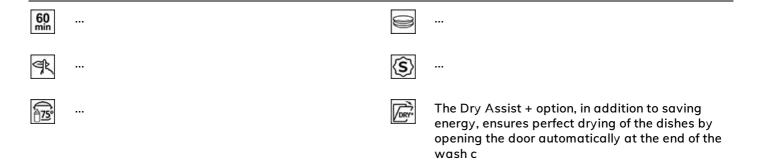



Benefit (TT)

Active Light

Maximum control thanks to the light projected on the floor that indicates when the dishwasher is running and when the cycle is complete

Smeg dishwashers equipped with ActiveLight signal the appliance's activity status by projecting a light on the floor while the cycle is running. The light goes out at the end of the cycle, signalling that the dishwasher can be unloaded.

FlexiDuo

The flexible third basket provides additional space, adapting to the load to accommodate various types of dishes, ensuring optimal organization and efficient use of interior capacity

The third FlexiDuo basket consists of two separate sections that can be handled independently of each other, stacked and/or removed, offering loading flexibility for every need. Depending on the arrangement, it allows cups, tall glasses, bulky utensils and pots and pans to be placed in the upper basket.

Planetarium Wash System

Full and deep wash coverage thanks to the advanced movement of the spray arm, an innovation patented by Smeg

Smeg's patented Planetarium Wash System guarantees impeccable cleaning. With a simultaneous double movement of the sprayer and 65 rotations per minute, it reaches every nook and cranny for extraordinary results. Dishes, glasses and utensils will be perfectly clean in no time. An intelligent system where efficiency and style meet, delivering brilliant results effortlessly.

Extra Glide Telescopic Guides

Smoother and more stable loading and unloading operations

Extra Glide telescopic guides ensure smooth and safe extraction of the upper basket, even with heavy loads. The telescopic design ensures smooth, stable and silent movement, improving ergonomics and convenience. Ideal for optimising space and ease of use, they combine durability and comfort in every washing operation.

DryAssist+

The Dry Assist+ system of automatic door opening at the end of the cycle ensures fast and energy-efficient drying