

DWAI6214X4



| | |
|--------------------------|-------------------------------|
| Product Family | Dishwashers |
| Commercial width | 60 cm |
| Commercial height | 82 cm |
| Installation | Partially-integrated built-in |
| Kitchen panel | Not supplied |
| N° baskets | 2 |
| EAN code | 8017709341756 |



Programs



| | | | |
|----------------------------------|-----------------------|----------------------|-----|
| N. of programmes | 5 | Mix | Yes |
| Washing temperatures | 45, 50, 65, 70, 75 °C | Hygiene 99,9% | Yes |
| Crystal | Yes | Normal ECO | Yes |
| Full express - 60 minutes | Yes | | |

Options



| | | | |
|---------------------------|-----|---------------------------|-------------|
| Dry Assist+ option | Yes | Delay timer option | 3-6-9 hours |
|---------------------------|-----|---------------------------|-------------|

Baskets



| | | | |
|--|--------------------------------------|--|---|
| Basket colour | Grey | Lower Basket | With 2 foldable racks |
| Basket components colour | Grey | Lower basket with anti-drip inserts | Yes |
| Handle | In plastic on upper and lower basket | Largest loadable dish in lower basket | 30,0 cm |
| Upper Basket | With central fixed racks | Colour Inner Components | Grey handles, Grey pastic plate for regulation second basket on three levels, Green Orbital |
| Height adjustment of the upper basket | On three levels | Cutlery basket | 13 place settings sliding |
| Largest loadable dish in upper basket | 25,0 cm | | |


Technical Features




| | | | |
|--------------------------------|--|--|---|
| Width (mm) | 598 mm | Drying system | Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle |
| Depth (mm) | 570 mm | Steam protection | In plastic |
| Product Height (mm) | 818 mm | Child safety system (door lock) | Yes |
| Controls | Electronic | Tube material | Stainless steel |
| Programme graphics | Symbols | Filter | Stainless steel |
| On/off indicator | Yes | Concealed heating element | Yes |
| Rinse aid indicator | Light | Hinges | Self balancing with fixed hinges |
| End of cycle indicator | Led on display, with acoustic signal | Min. and max plinth height | 100 - 215 mm |
| Auto switch-off | Yes | Adjustable feet | 7cm, from 820 to 890 mm |
| Washing system | Orbital | Additional gaskets | Yes, with stainless steel plate |
| Third spray arm | Single | Back cover | Yes |
| Flood protection system | Total Acquastop | Depth of dishwasher with open door (mm) | 1146 mm |
| Water supply | Single; cold/hot water max. 60°C - energysave with hot water up to 35% | Back feet adjustable from front | Yes |
| Max water hardness | 100°FH;58°dH | Top cover | In plastic |

Electrical Connection

| | | | |
|------------------------|-----------|----------------------------------|---------------|
| Connected power | 1800 W | Type of connection | Single-phase |
| Current | 10 A | Power supply cable length | 140 cm |
| Voltage | 220-240 V | Plug | (I) Australia |
| Frequency (Hz) | 50 Hz | | |

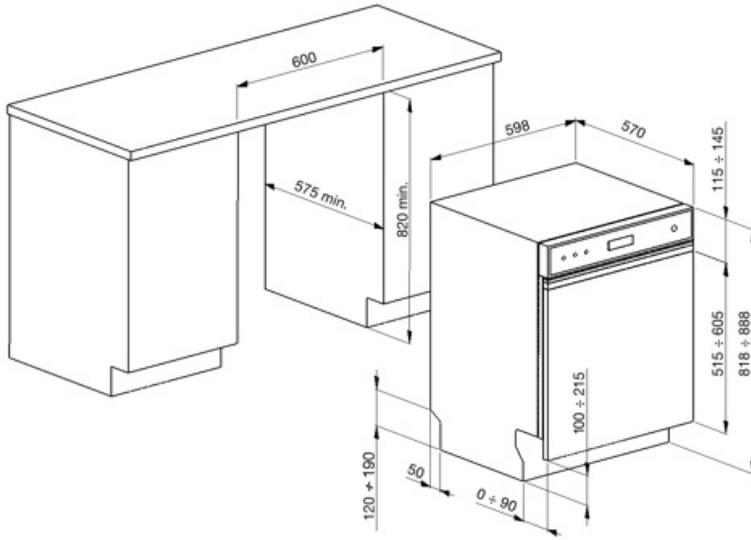

Compatible Accessories



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

Symbols glossary

| | |
|--|--|
|  <p>Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.</p> |  <p>Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.</p> |
|  <p>COMM_HEIGHT_82_72dpi</p> |  <p>Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.</p> |
|  <p>The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash c</p> |  <p>Fingerprint proof stainless steel: Fingerprint proof stainless steel keeps stainless steel looking as good as new.</p> |
|  <p>Noise Level: Excellent insulation and special devices keep noise to a minimum.</p> |  <p>Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.</p> |
|  <p>Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.</p> |  <p>Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.</p> |
|  <p>REF_PRG_NORMAL_ECO_72dpi</p> |  <p>The symbols show the number of plate settings of the dishwasher.</p> |
|  <p>Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.</p> |  <p>System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.</p> |
|  <p>Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.</p> |  <p>HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising</p> |