
DWAU6224N4

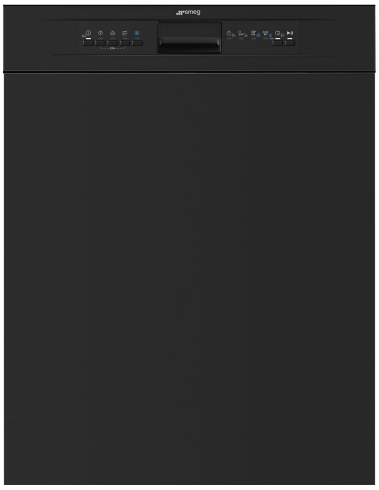

Product Family	Dishwashers
Commercial width	60 cm
Commercial height	82 cm
Installation	Partially-integrated built-in
N° baskets	2
Motor	Single phase
EAN code	8017709345891

Programs

N. of programmes	10	**Light soiling**	Yes
Washing temperatures	38, 50, 55, 65, 70, 75 °C	**Mix**	Yes
Soak	Yes	**Hygiene 99,9%**	Yes
Express 27'	Yes	**Delicate**	Yes
Crystal	Yes	**Intensive 70°**	Yes
Full express - 60 minutes	Yes	**Normal ECO**	Yes

Options

Dry Assist+ option	Yes	**1/2 load FlexiZone option**	Yes
Delay timer option	3-6-9-12 hours	**Special programs option**	Yes

Baskets

Basket colour	Grey	**Lower Basket**	With 4 foldable racks
Basket components colour	Grey	**Lower basket with anti-drip inserts**	Yes
Handle	In plastic on upper and lower basket	**Largest loadable dish in lower basket**	30,0 cm
Upper Basket	With central fixed racks		

Height adjustment of the upper basket	On three levels	**Colour Inner Components**	Blue
Largest loadable dish in upper basket	19,0 cm	**Cutlery basket**	13 place settings sliding


Technical Features




Width (mm)	598 mm	**Drying system**	Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle
Depth (mm)	570 mm		
Product Height (mm)	818 mm		
Controls	Electronic	**Steam protection**	In plastic
Programme graphics	Symbols	**Child safety system (door lock)**	Yes
On/off indicator	Yes	**Tub material**	Stainless steel
Rinse aid indicator	Light	**Filter**	Stainless steel
Progress indicator	Yes	**Concealed heating element**	Yes
End of cycle indicator	Led on display, with acoustic signal	**Hinges**	Self balancing with fixed hinges
Auto switch-off	Yes	**Min. and max plinth height**	100 - 170 mm
Washing system	Orbital	**Adjustable feet**	7cm, from 820 to 890 mm
Third spray arm	Single	**Additional gaskets**	Yes, with stainless steel plate
Flood protection system	Total Acquastop	**Back cover**	Yes
Water supply	Single; cold/hot water max. 60°C - energysave with hot water up to 35%	**Depth of dishwasher with open door (mm)**	1146 mm
Max water hardness	100°fH;58°dH	**Back feet adjustable from front**	Yes
		Adjustable plinth	By height and depth
		Top cover	In plastic

Electrical Connection

Connected power	1800 W	**Type of connection**	Single-phase
Current	10 A	**Power supply cable length**	140 cm
Voltage	220-240 V		
Frequency (Hz)	50 Hz	**Plug**	(I) Australia

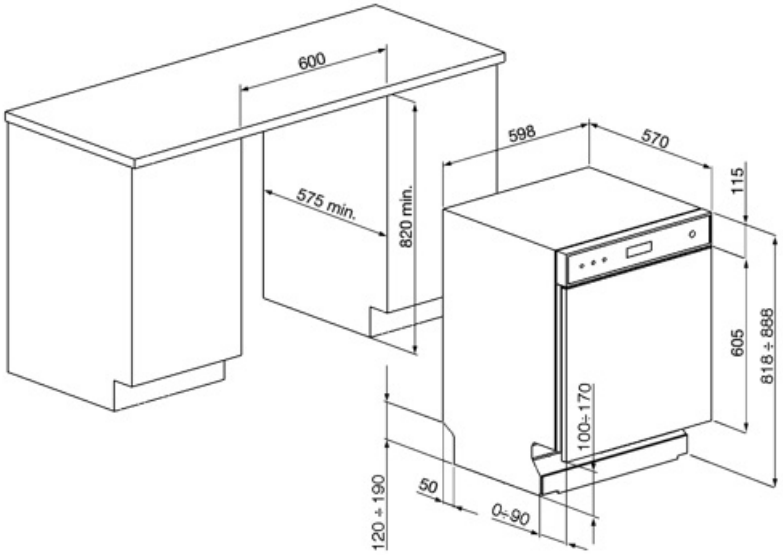
600
575 min.
820 min.
598
570
115
605
818 ÷ 888
100÷170
120 ÷ 190
50
0÷90

Compatible Accessories



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

Alternative products



DWAU6224X4

Colour: Stainless steel

Symbols glossary



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



COMM_HEIGHT_82_72dpi



Fingerprint proof stainless steel: Fingerprint proof stainless steel keeps stainless steel looking as good as new.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



REF_PRG_NORMAL_ECO_72dpi



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash c



LIGHT SOILING Washing programme with low water and energy consumption.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



The symbols show the number of plate settings of the dishwasher.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Allows you to enable additional programs when selected together with any wash cycle.



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising