

DWAU6D15XT



| | |
|-------------------|------------------------|
| Product Family | Dishwashers |
| Commercial width | 60 cm |
| Commercial height | 86 cm |
| Installation | Under counter built-in |
| Kitchen panel | Not supplied |
| N° baskets | 3, FlexiDuo |
| Motor | Single phase |
| EAN code | 8017709218003 |




Programs / Functions



| | | | |
|----------------------|----------------------|-----------------|-----|
| N. of programmes | 5+5 quick programmes | ECO Quick | Yes |
| Washing temperatures | 45, 50, 65, 70 °C | Daily Quick | Yes |
| Soak | Yes | Normal Quick | Yes |
| Rapid 27' | Yes | Auto 60-70 | Yes |
| ECO | Yes | Strong and fast | Yes |
| Ultraclean | Yes | Normal ECO | Yes |

Options



| | | | |
|---------------------------|----------------|-------------------|-----|
| Enersave option | Yes | Options for tabs | Yes |
| Delay timer option | Up to 24 hours | FlexiTabs | |
| 1/2 load FlexiZone option | Yes | Quick Time option | Yes |

Baskets



| | | | |
|--------------------------|--|---------------------------------------|---|
| Basket colour | Grey | Largest loadable dish in upper basket | 18,0 cm |
| Basket components colour | Grey | Lower Basket | With completely foldable racks and glass holder |
| Handle | In plastic with stainless steel insert on upper and lower basket | Lower basket with anti-drip inserts | Yes |

| | | | |
|---------------------------------------|--|---------------------------------------|---------------------------|
| Upper Basket | With foldable central racks and glass holder | Largest loadable dish in lower basket | 35,0 cm |
| Height adjustment of the upper basket | On three levels | Cutlery basket | 13 place settings sliding |
| Upper basket with EasyGlide System | Yes | | |


Technical Features



| | | | |
|-------------------------|--|---|----------------------------------|
| Width (mm) | 598 mm | Steam protection | In plastic |
| Depth (mm) | 547 mm | Internal light | With White led |
| Display type | OLED | Tub material | Stainless steel |
| Product Height (mm) | 858 mm | Filter | Stainless steel |
| Controls | Electronic | Concealed heating element | Yes |
| Display | Delayed start, Programme time indicator, Time to end indication, Dynamics programme time indicator | Hinges | Self balancing with fixed hinges |
| Programme graphics | Symbols | Min. and max plinth height | 100 - 170 mm |
| Rinse aid indicator | Light | Adjustable feet | 7cm, from 860 to 930 mm |
| End of cycle indicator | On display, with acoustic signal | Insulation level | Medium |
| Washing system | Planetarium | Additional gaskets | Yes, with stainless steel plate |
| Third spray arm | Single | Back cover | Yes |
| Turbidity sensor | Yes | Depth of dishwasher with open door (mm) | 1146 |
| Aquatest | | Back feet adjustable from front | Yes |
| Flood protection system | Total Acquastop | Adjustable plinth | By height and depth |
| Water supply | Single; cold/hot water max. 60°C - energysave with hot water up to 35% | Top cover | In plastic |
| Max water hardness | 100°FH;58°dH | | |
| Drying system | Natural condenser drying, with EnerSave automatic door opening system at the end of the cycle | | |

Electrical Connection

| | | | |
|-----------------|---------------|---------------------------|--------------|
| Plug | (I) Australia | Frequency (Hz) | 50 Hz |
| Connected power | 1800 W | Type of connection | Single-phase |
| Current | 10 A | Power supply cable length | 140 cm |
| Voltage | 220-240 V | | |

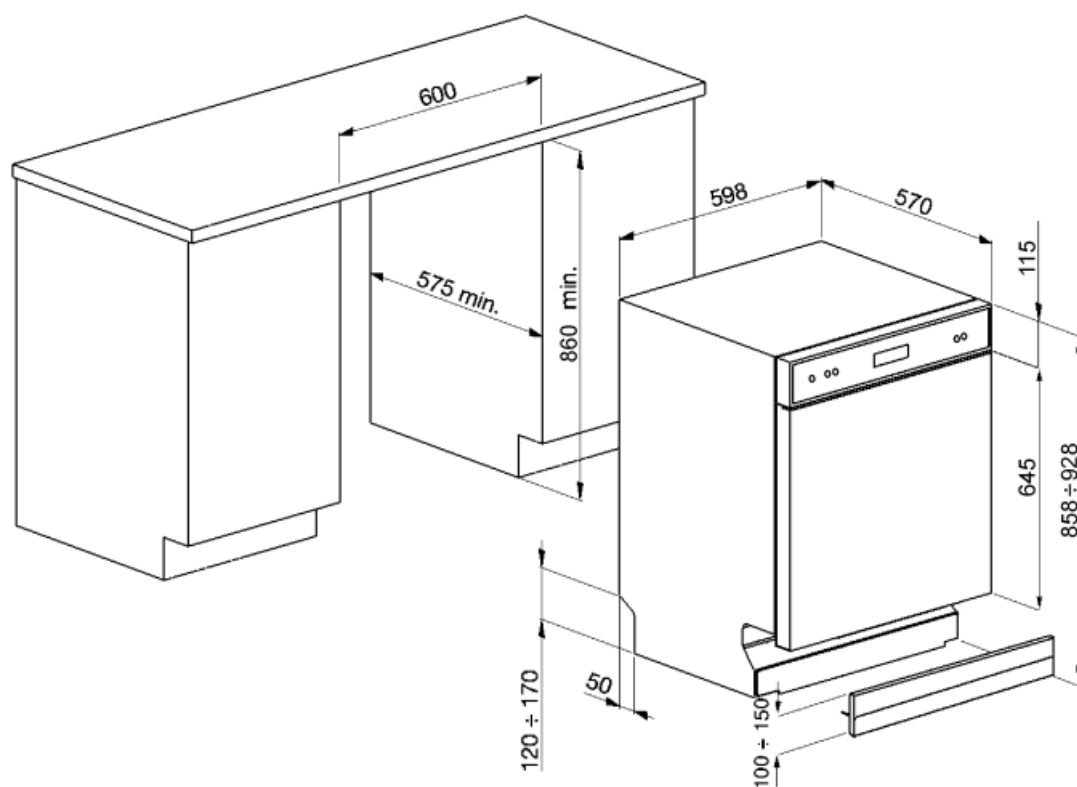

Not included accessories

KITPL60FABB




Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABX






















Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary (TT)

| | | | |
|--|--|---|--|
|  | AquaTest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy. |  | Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying. |
|  | COMM_HEIGHT_86_72dpi |  | Delay Timer: The delay timer can postpone the start of the program by up to 24 hours. |
|  | LED display: to show programmes, functions and options selected and the time to the end of the cycle. |  | EasyGlide: Convenient EasyGlide system for easy unloading of the appliance that allows reaching maximum flexibility of load of the machine. |
|  | FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules. |  | Flexitabs: Flexitabs adjusts the wash cycle to give the best possible results regardless of the type of detergent used. |
|  | FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed. |  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |
|  | PLANETARIUM_WASHING_SYSTEM_72dpi |  | Auto 60° - 70°: The auto program regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required. |
|  | Daily Quick: The daily program is suitable for quick daily washing of dishes. |  | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option. |
|  | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option. |  | Normal Quick: Program Normal Quick is suitable for quick washing of mixed dishes, for everyday use. |
|  | Soak programme: The soak programme provides a rinse to prevent dirt from drying. |  | Strong&Fast: This special programme takes less than 1 hour to eliminate the most stubborn dirt and dried on residues. |
|  | The symbols show the number of plate settings of the dishwasher. |  | Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary. |
|  | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher. | | |