# FAB10HLRD6




| | |
|---|---|
| **Product Family** | Refrigerator |
| **Installation** | Free Standing |
| **Category** | One Door |
| **Reference width** | Until 60 cm |
| **Reference height** | Until 100 cm |
| **Cooling type** | Static |
| **Defrost** | Automatic |
| **Hinge type** | Standard |
| **Hinge position** | Left |
| **EAN code** | 8017709342616 |

## Aesthetics

| | | | |
|---|---|---|---|
| **Aesthetic** | 50's Style | **Handle type** | Fixed |
| **Colour** | Red | **Handle colour** | Chrome |
| **Design** | Rounded | **Logo colour** | Chrome |
| **Finishing** | Glossy | **Side material** | Steel |
| **Material** | Heat-moulded | **Side colour** | Red |
| **Handle** | External | **Logo** | Applied |

## Refrigerator compartment features

| | | | |
|---|---|---|---|
| **No. of adjustable shelves** | 2 | **Internal light in fridge** | Yes |
| **Shelves material** | Glass | **Type of internal light (fridge)** | LED |
| **No. of lights** | 1 | | |

## Refrigerator Inner Door

| | | | |
|---|---|---|---|
| **Number of adjustable door shelves** | 2 | **No. of bottle shelves** | 1 |

## Other Refrigerator features

| | |
|---|---|
| **Accessories** | Bottle rack, Separatore lattine |

## Other technical features

| | |
|---|---|
| **Type of temperature control** | Electro-mechanical |
| **No. of compressors** | 1 |
| **Refrigerant gas type** | R600a |
| **Type of compressor** | Standard |
| **Refrigerant Quantity (g)** | 28 g |
| **Foam agent** | Cyclopentane |

## Performance / Energy Label



| | |
|---|---|
| **Annual energy consumption** | 72 kWh/a |
| **Energy efficiency class** | D |
| **Airborne acoustical noise emission class** | B |
| **Total volume** | 135 l |

| | |
|---|---|
| **Sum of the volumes of the chill compartment(s) and the unfrozen compartment(s)** | 135 l |
| **Noise level** | 35 dB(A) re 1 pW |
| **Climatic class** | SN, N, ST, T |
| **EEI** | 79 % |

## Electrical Connection

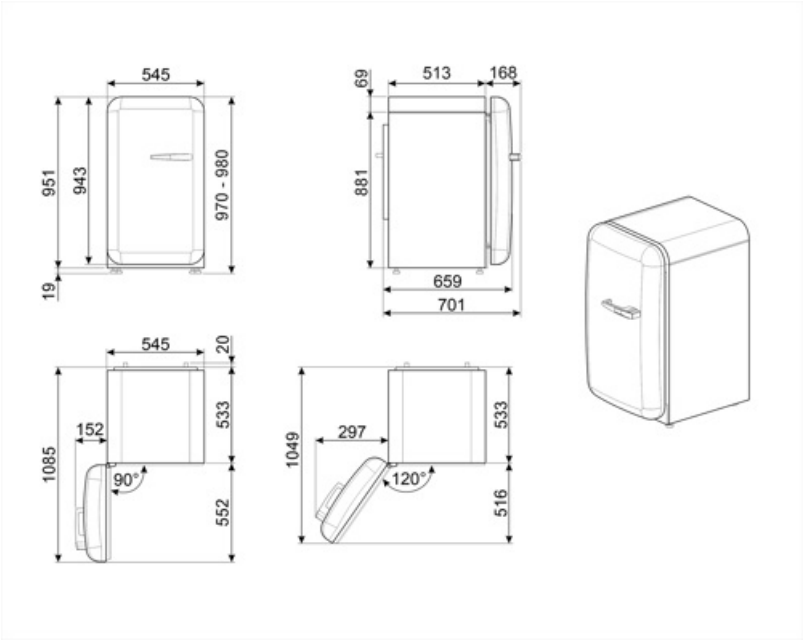
| | |
|---|---|
| **Electrical connection rating** | 50 W |
| **Current** | 0,35 A |
| **Voltage (V)** | 220-240 V |

| | |
|---|---|
| **Frequency (Hz)** | 50 Hz |
| **Power supply cable length** | 180 cm |
| **Plug** | (F;E) Schuko |

## Logistic Information

| | |
|---|---|
| **Width** | 545 mm |
| **Depth without handle** | 659 mm |
| **Height max** | 970 mm |

| | |
|---|---|
| **Product width with maximum doors opening** | 842 mm |
| **Product depth with handle** | 701 mm |
| **Product depth with doors open at 90°** | 1085 mm |


545
951
943
970 - 980
19
69
513
168
881
659
701
545
20
1085
152
533
90°
552
1049
297
533
120°
516

## Alternative products



**FAB10HLBL6**

**Hinge position:** Left
Black



**FAB10HLCR6**

**Hinge position:** Left
Cream



**FAB10HLWH6**

**Hinge position:** Left
White

## Symbols glossary



The automatic defrost system works by automatically defrosting at regular intervals eliminating the need to defrost altogether.




LED interior lighting: is a more energy efficient and long lasting way of illuminating the interior of the appliance.




Energy efficiency class D