

FD526DS

Família Máquina de lavar louça profissional

Subfamily Raised

Undercounter traywasher

500x500 mm Dimensões do cesto Painel de comandos Ecrã Touch Rinse pump Sim

Ligação energética 400 V 3N~ / 13 A / 6,7 kW / 50 Hz

Standard



1.5 l/h

Mercado

Wash pump

Industries Ristoranti / Catering;

> Bakeries / Pastry shops; Food Industries; Retalho alimentar; Outras indústrias

de comida

Design

Topline Cor dos LEDs Branco Design

Especificações técnicas

Water consumption per 3,21 Carga de detergente

cycle Carga de 0,4 l/h

Temperatura pré-5°C enxaguamento definida de ligação da

Altura de carga 400 mm água

operável

Max. inlet temperature Profundidade com porta 1020 mm

Dureza máxima da água 54°f - 30°dH

Pressão de entrada 1-6 bar / 100-600 kPa Dimensões de produto 600x675x1315 mm

LxPxA:

Programas

Program options Extra rinse; Clean water cycle

Numero máximo de cestos/hora 72 Numero máximo de pratos/hora 1296



Ligação elétrica

Tank heating element

power

Boiler heating element

power

Wash pump power

2000 W

6000 W

730 W

Ligação pré-definida

Ligação eléctrica

opcional

6700 W

230 V 3~ / 20 A / 7,0 kW / 50 Hz; 230 V~ / 13 A / 3,0 kW / 50 Hz; 230 V~ / 18 A /

4,0 kW / 50 Hz; 230 V~ / 22

A / 5,0 kW / 50 Hz

Interface

Display

Luz indicadora On/Off Luz indicadora de falta

de sal

Alerta de falta de abrilhantador

Display TFT

Sim

Sim

Sim

Alerta de falta de

detergente

Indicador da fase do

programa

Indicador de fim do

programa

Diagnóstico manual

Sim

Sim

Sim

Sim

ESPECIFICAÇÕES TÉCNICAS

Tank

Tipologia Material da cuba

Painel traseiro

Porta equilibrada

Sistema de lavagem

superior

Sistema de lavagem

inferior

Filtro da cuba Junta da porta Pofundo

Parede dupla Aço Inox AISI 304

Porta galvanizada

One wash and one split rinse spray arms, stainless

One wash and one split rinse spray arms, stainless

steel

Aço inox Em 3 lados Guias dos cestos

Hood elevation system

Filter

Capacidade da cuba Capacidade da caldeira

Classe de Proteção Adjustable feet

Altura max. de drenagem

Embutidas Manual

5-stage filter system

6.5 I

IPX4 Sim

600 mm

Acessórios incluídos

Cesto de fundo plano

Manqueira de

abastecimento de água

1x PB50G02

Sim - 2m

Mangueira de drenagem Sim - 2m

Equipamentos

Bomba de drenagem Peristaltic detergent dispenser

Sim

Controlo eletrónico

Option for auto daily

switch on

Contador de ciclos Break tank

Sim, desligado por

definição


Sim Sim



Peristaltic rinse-aid dispenser	Controlo eletrónico	Renovação parcial da água na cuba e bomba de drenagem integrada	Sim
Sonda de nível químico Amaciador automático	Sim, opcional KITSONLIV Sim	Diâmetro do tudo de abastecimento de água	DN15 - ½"
incorporado		Ø do tubo de drenagem	DN20-G 3/4"
Rinse boiler Thermostop system	Yes - default	Comprimento da mangueira de	2,2 m
Wash tank Thermostop	Sim	detergente (vermelha)	
system		Comprimento da	2,2 m
Wash pump soft start system	Sim	mangueira de enxaguamento (azul)	
Stand-by system	Sim		

Dados de logística

Largura da embalagem
(mm)660 mmDimensões do produto
embalado (mm)1470x660x700 mmProfundidade da
embalagem (mm)700 mmPeso líquido (kg)92.000 kgPeso bruto (kg)102.000 kgAltura da embalagem1470 mm

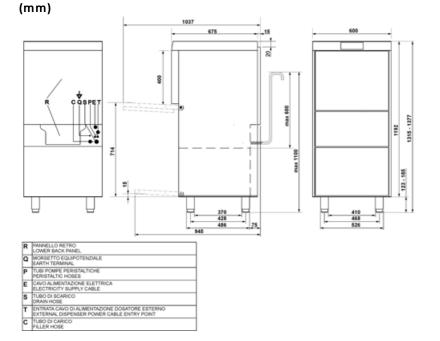



Acessórios Compatíveis

KITSONLIV

Probe level kit





Polypropylene basket for 18 plates Ø250 mm, dim.(WxDxH) 500x500x105



PHOOS01

Polypropylene single basket for cutlery



PB50G01

KIT-WG500

Universal flat bottom polypropylene basket, dim. (WxDxH) 500x500x100

Trays holder for trays washer

PHOOS02

6 compartment polypropylene basket for cutlery



WB50D01

Wire basket for 18 dishes Ø250 mm. or self service trays, dim. (WxDxH) 500X500x92 mm



WB50G01

Universal wire basket with flat bottom, dim. (WxDxH) 500x500x123 mm



WB50G02

Wire basket with sloped bottom for glasses Ø90 mm max, dim. (WxDxH) 500x500x170 mm



WB50G03

Wire basket with sloped bottom for glasses Ø72 mm max, dim. (WxDxH) 500x500x235 mm



WB50G04

Wire basket with sloped bottom for glasses Ø135 mm max, dim. (WxDxH) 500x500x165 mm



WB50T02

Wire basket for 7 trays GN1/1 h 20 mm



WH00S01

Wire insert for 12 small dishes



WS5

Stainless steel underframe for glasswashers and dishwashers, dim. (WxDxH) 595x595x490 mm



Symbols glossary

A0=

THERMODESINFECTION A0=30



THERMODESINFECTION A0=60



SUITABLE FOR EURONORM TRAY



SUITABLE FOR GASTRONORM TRAY



HTR RINSING SYSTEM



MAX. USABLE HEIGHT 400mm



5 STAGE FILTER



Benefit (TT)

Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.



Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Raised version

Easy and fast dishwasher loading and unloading operations

The raised design facilitates loading and unloading dishes, making these tasks faster and more efficient. This results in significant time savings, especially valuable in high-intensity work environments.

The space below the dishwasher can be used to store detergents, utensils, or other accessories, providing a practical solution to optimise space usage, particularly in compact kitchens.

Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.