


HOB182DG

| | |
|--------------------------------|------------------------------------|
| Product Family | Hob |
| Built-in | Ultra-low profile or Fully Flushed |
| Dimensions | 80 cm |
| Power supply | Electric |
| Type | Induction with integrated hood |
| Extraction | Expulsion |
| Electronic control | Yes |
| EAN code | 8017709331856 |
| Energy efficiency class (EEC) | A++ |



Aesthetics

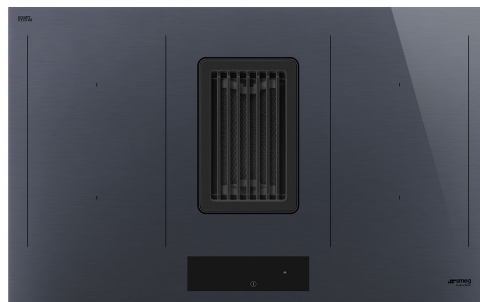

| | |
|-------------------------|----------------------------------|
| Aesthetics | Linea |
| Colour | Neptune Grey |
| Finishing | Glass |
| Material | Glass |
| Glass Type | Ceramic |
| Glass edge | Straight edge |
| Pan stands | Cast iron |
| Type of control setting | Touch control back-lighted White |
| Slider | Yes |
| Slider | White |
| Control knobs position | Front |
| Serigraphy colour | Grey |

Programs / Functions



| | |
|-----------------------------------|----------------------|
| Total no. of cook zones | 4 |
| No. of induction cook zones | 4 |
| Time-setting options | Automatic switch-off |
| No. of cooking zones with booster | 4 |
| No. of Flexible zones | 2 |
| Main on/off switch | Yes |
| Power levels | 9 |

Options



| | | | |
|--------------------------------------|--------------------|--|--------------------------|
| Multizone Option | Yes | Residual time indicator | Yes |
| Flexible Zone Type | MultiZone | Limited Power Consumption Mode | Yes advance |
| Standard cut out | 482-483x765-766 mm | Limited Power Consumption Mode in W | 2800, 3500, 4500, 7400 W |
| Keep warm automatic function | Yes | Show Room Demo Option | Yes |
| End cooking timer | 4 | Control Lock / Child Safety | Yes |
| Pause option | Yes | Cleaning option | Yes |
| Minute minder | 1 | Quick start | Yes |
| End of cooking acoustic alarm | Yes | Rapid level selection | Yes |

Technical Features



Front left - Induction - Multizone - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm
 Rear left - Induction - multizone - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm
 Rear right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm
 Front right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm
 Multizone left - Booster 3.70 kW - 39.0x21.0 cm
 Multizone right - Booster 3.70 kW - 39.0x21.0 cm

| | | | |
|--|---------------|---|-----|
| Automatic setting according to pan dimension | Yes | Automatic switch off when overflow | Yes |
| Automatic pan detection | Yes, min 9 cm | Residual heat indicator | Yes |
| Permanent Automatic Pot Detection with indication of the relative control | Yes | Protection against accidental start up | Yes |

Accessories Included

Other accessories Extraction and Filtering Kit inc tubes and Charcoal filter

Electrical Connection

| | | | |
|--------------------------|-----------|--|------------------------------|
| Nominal power (W) | 7620 W | Type of electric cable supplied | Yes, Single and Double phase |
| Current | 33 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Power supply cable length | 120 cm |
| Voltage 2 (V) | 380-415 V | Terminal Box | 6 poles |

Controls (hood)

| | | | |
|----------------------|---------------|---------|-----|
| Hood control setting | Touch control | Display | Yes |
| Led colour | White | | |

Programs / Functions (hood)

| | | | |
|-----------------|----------|-------------------|---|
| Delay function | Yes | Hood time setting | Delay |
| No. of speeds | 8 | Other options | Kit for Recirculation and Extraction included |
| Intensive speed | 2 | | |
| Other functions | AUTOVENT | Auto-Vent | yes |

Technical Features (Hood)

| | | | |
|------------------------------|-----------------------|------------------------------|------------------|
| Free outlet maximum capacity | 750 m ³ /h | Anti-grease filters | Stainless steel |
| Motor power | 220 W | Charcoal filters included | YES, regenerable |
| No. of filters | 1 | Filter replacement indicator | Yes |

Performance / Energy Label (hood)

| | | | |
|---|-----------------------|--|-----------------------|
| Fluid Dynamic Efficiency (FDE) | 37.60 | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 65 dB(A) |
| Fluid Dynamic Efficiency class (FDEC) | A | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 72 dB(A) |
| Lighting Efficiency (LE) | 0.0 lux/W | Power Consumption in Off mode (Po) | 0.49 W |
| Lighting Efficiency Class (LEC) | NA | Time increase factor (F) | 0.6 |
| Grease Filtering Efficiency (GFE) | 85.1 % | Energy Efficiency Index per first cavity | 32.8 |
| Grease Filtering Efficiency Class (GFEC) | B | Measured air flow rate at best efficiency point (Qbep) | 328 m ³ /h |
| Air flow at mininum speed (Qmin) | 245 m ³ /h | Measured air pressure at best efficiency point (Qbep) | 540 Pa |
| AIR FLOW AT MAXIMUM SPEED (QMAX) | 505 m ³ /h | Measured electric power input at best efficiency point (Wbep) | 131 W |
| Air flow at boost speed (Qboost) | 700 m ³ /h | Sound power level at highest setting (Lwa) | 65 dB(A) |
| Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) | 51 dB(A) | | |

Speed 1

| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 245 m ³ /h |
| Noise level IEC 60704-2-13 | 51 dB(A) |
| Pressure | 290 Pa |
| Power | 35 W |

Speed 2

| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 285 m ³ /h |
| Noise level IEC 60704-2-13 | 55 dB(A) |
| Pressure | 370 Pa |
| Power | 45 W |

Speed 3

| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 350 m ³ /h |
| Noise level IEC 60704-2-13 | 57 dB(A) |
| Pressure | 525 Pa |
| Power | 65 W |

Speed 4

| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 380 m ³ /h |
| Noise level IEC 60704-2-13 | 59 dB(A) |
| Pressure | 530 Pa |
| Power | 75 W |

Speed 5

| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 410 m ³ /h |
| Noise level IEC 60704-2-13 | 62 dB(A) |
| Pressure | 535 Pa |
| Power | 85 W |

Speed 6

| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 445 m ³ /h |
| Noise level IEC 60704-2-13 | 63 dB(A) |
| Pressure | 540 Pa |
| Power | 105 W |

Speed 7

| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 475 m ³ /h |
| Noise level IEC 60704-2-13 | 64 dB(A) |
| Pressure | 545 Pa |
| Power | 115 W |

Speed 8


| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 505 m ³ /h |
| Noise level IEC 60704-2-13 | 65 dB(A) |
| Pressure | 550 Pa |
| Power | 130 W |

Intensive speed


| | |
|-----------------------------|-----------------------|
| Extraction rate (IEC 61591) | 550 m ³ /h |
| Noise level IEC 60704-2-13 | 66 dB(A) |
| Pressure | 555 Pa |
| Power | 140 W |

Intensive Speed 2

| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 700 m ³ /h |
| Noise level IEC 60704-2-13 | 72 dB(A) |
| Pressure | 560 Pa |
| Power | 220 W |

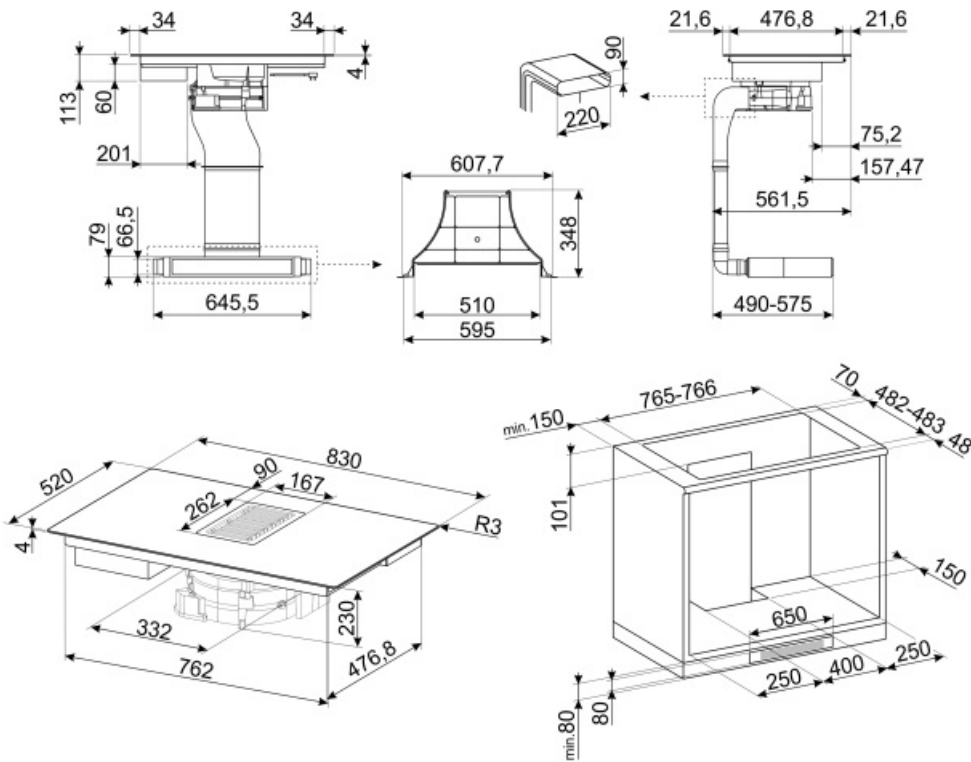

Not included accessories



KITF6HOBD

Recirculating kit for Hobd: tubes + regenerable anti-odor filter + grid in stainless steel with magnetics fix (easy to remove) that fit in a plinth of min. 6 cm



CON60H

Flat duct connector for tubes 220*60 mm. It helps to connect more tubes of the kit KITEHOBD4



GRI60H

Rectangular Louvred grille, external size 246*80 mm and internal 226*60*50 mm



KITEHOBD4

Filtering kit (lateral outlet) optional for Hobd: tube 1,5 mt and curve



FLTHOBD

Ceramic Anti Odour Filter regenerable as spare part suitable for Recirculating kit (accessory KITF6HOBD) of the hob with integrated hood models HOBD682D and HOBD682R



RED60H

Reducer from 90 to 60 mm suitable for rectangular tube of 220 mm. Size: 220*90*92 mm



TPK



















Stainless steel grill plate to cook Teppanyaki dishes



FLTHOBD4

Charcoal Anti Odour Filter regenerable as spare part suitable for HOBD482D

Symbols glossary

| | |
|--|---|
|  <p>Power booster: option allows the zone to work at full power when very intense cooking is necessary.</p> |  <p>Heavy duty cast iron pan stands: for maximum stability and strength.</p> |
|  <p>Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.</p> |  <p>The slider control panel allows you to adjust the power simply by passing your finger across the touch device.</p> |
|  <p>Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.</p> |  <p>Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility</p> |
|  <p>Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.</p> |  <p>PAUSE_72dpi</p> |
|  <p>Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).</p> |  <p>Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.</p> |
|  <p>Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.</p> |  <p>Time elapsed: shows how long the cooking zone has been in use.</p> |
|  <p>Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.</p> |  <p>...</p> |
|  <p>...</p> |  <p>...</p> |
|  <p>Evolution Slider totally Back-lighted ghost effect</p> |  <p>...</p> |