

HOBD382MB2

Product Family Hob

Built-in Ultra-low profile or Fully Flushed

Dimensions 83 cm
Power supply Electric

Type Induction with integrated hood

Extraction Expulsion Electronic control Yes

EAN code 8017709341886

Energy efficiency class (EEC) A+



Aesthetics





AestheticsClassicColourMatte BlackFinishingGlassMaterialGlassGlass TypeCeramicGlass edgeStraight edgePan standsStainless steel

Double ceramization Yes

Type of control setting EVO Slider

Slider Yes
Slider White
Control knobs position Front
Logo Silk screen
Serigraphy colour Grey

Program / Functions



No. of induction cook zones 4

Time-setting options Automatic switch-off

No. of cooking zones with booster 4

No. of Flexible zones 2

Main on/off switch Yes

Power levels 9

Total no. of cook zones 4



Options













Yes





Multizone Option Flexible Zone Type MultiZone Standard cut out 490x750 mm

Keep warm automatic

function

End cooking timer 4 Pause option Yes Minute minder End of cooking acoustic

alarm

Yes

Residual time indicator Yes Limited Power Yes advance

Consumption Mode

Limited Power 2800, 3500, 4500, 7400 W

Yes

Yes

Consumption Mode in W

Show Room Demo

Option

Control Lock / Child

Safety

Cleaning option Yes Quick start Yes Rapid level selection Yes

Technical Features









Front left - Induction - Multizone - 2.10 kW - Booster 3.0 kW - 21.0x19.0 cm

Rear left - Induction - multizone - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm Rear right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm

Yes

Front right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm

Multizone left - Booster 3.70 kW - 39.0x21.0 cm Multizone right - Booster 3.70 kW - 39.0x21.0 cm

Automatic setting according to pan

dimension

Automatic pan

Yes, min 9 cm

detection

Permanent Automatic Yes Pot Detection with indication of the relative

control

Automatic switch off

when overflow

Residual heat indicator **Protection against**

accidental start up

Yes

Yes Yes

Accessories Included

Filtering kit and charcoal Other accessories

filter included

Electrical Connection

Nominal power (W) 7620 W Current 33 A Voltage (V) 220-240 V Voltage 2 (V) 380-415 V Type of electric cable supplied

Frequency (Hz) Power supply cable

length **Terminal Box**

120 cm

Yes, Single and Double

phase

6 poles

50/60 Hz



Controls (hood)

Hood control setting

Led colour

Touch control

White

Yes

Display

Yes

Programs / Functions (hood)

Delay function

No. of speeds 8

Intensive speed 2 Hood time setting

Other options

Delay

Kit for Recirculation and

Extraction included

Auto-Vent yes

Technical Features (Hood)

Free outlet maximum

capacity

650 m³/h

Motor power

220 W

85,1 %

230 m³/h

500 m³/h

No. of filters

Anti-grease filters

Charcoal filters included YES, regenerable

Filter replacement

indicator

Stainless steel

Yes

Performance / Energy Label (hood)

Fluid Dynamic Efficiency 32,10

(FDE)

Fluid Dynamic Efficiency A

class (FDEC)

Lighting Efficiency (LE) 0.0 lux/W

Lighting Efficiency Class NA

(LEC)

Grease Filtering

Efficiency (GFE)

Grease Filtering

Efficiency Class (GFEC)

Air flow at minumum

speed (Qmin)

AIR FLOW AT

MAXIMUM SPEED

(QMAX)

Air flow at boost speed 630 m³/h

(Qboost)

Airbourne acouistical A- 49 dBA weighted sound Power

Emission at minimum speed (SPEmin)

Airborne acoustical A-68 dBA

weighted sound Power **Emission at maximum** speed (SPEmax)

Airbourne acoustical A- 73 dBA

weighted sound power emission at boost speed (SPEboost)

Time increase factor (F)

Energy Efficiency Index per first cavity

Measured air flow rate

at best efficiency point

(Qbep)

Measured air pressure

at best efficiency point

(Qbep)

Measured electric power input at best efficiency point (Wbep)

Sound power level at highest setting (Lwa)

139 W

502 Pa

44.2


320 m³/h

68 dBA



Speed 1		Speed 2	
Extraction rate IEC 61591	230 m³/h	Extraction rate IEC 61591	270 m³/h
Noise level IEC 60704- 2-13	49 dBA	Noise level IEC 60704- 2-13	51 dBA
Pressure	280 Pa	Pressure	370 Pa
Power	40 W	Power	50 W
Speed 3		Speed 4	
Extraction rate IEC 61591	340 m³/h	Extraction rate IEC 61591	370 m³/h
Noise level IEC 60704- 2-13	55 dBA	Noise level IEC 60704- 2-13	60 dBA
Pressure	400 Pa	Pressure	450 Pa
Power	70 W	Power	90 W
Speed 5		Speed 6	
Extraction rate IEC 61591	400 m³/h	Extraction rate IEC 61591	435 m³/h
Noise level IEC 60704- 2-13	62 dBA	Noise level IEC 60704- 2-13	63 dBA
Pressure	500 Pa	Pressure	550 Pa
Power	100 W	Power	120 W
Speed 7		Speed 8	
Extraction rate IEC 61591	460 m³/h	Extraction rate IEC 61591	500 m³/h
Noise level IEC 60704- 2-13	65 dBA	Noise level IEC 60704- 2-13	68 dBA
Pressure	600 Pa	Pressure	620 Pa
Power	150 W	Power	170 W
Intensive speed		Intensive Speed 2	
Extraction rate (IEC 61591)	540 m³/h	Extraction rate IEC 61591	630 m³/h
Noise level IEC 60704- 2-13	70 dBA	Noise level IEC 60704- 2-13	73 dBA
Pressure	625 Pa	Pressure	630 Pa
Power	180 W	Power	220 W



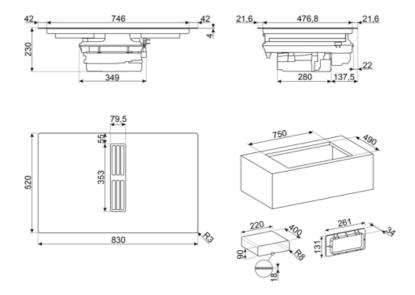



Compatible Accessories

CON60H



Flat duct connector for tubes 220*60 mm. It helps to connect more tubes of the kit KITEHOBD4

CON90H

Connector for rectangular tubes high 90 mm. Size external 227*94*63 mm, internal 223*90*63 mm

FLTHOBD2



n.2 high-performance carbon filters regenerable up to 8 times, washing it in the dishwasher and drying it at max 70° in the oven for max 120 minutes



FLTSTDHOBD2

Anti Odour Filter not regenerable as spare part, suitable for recirculation mode.





Rectangular Louvred grille, external size 246*80 mm and internal 226*60*50 mm



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.





Stainless steel ventilation grille, size 426*60 mm.



KITDT50X10

tape for installation kit of HOBD*2. 10 m lenght. 50 mm width.

KITEHOBD10

KITREBFLOW



Ducted kit for HOBD*2 with tubes and curve high 10 mm.



KITEHOBD4

Filtering kit (lateral outlet) optional for Hobd: tube 1.5 mt and curve






Rectangular grid used in ventilation system. It regulates the air flow from the kitchen. Suitable for HOBD*2 models.



KITRHOBD6

Mounting kit for recirculating installation: pipes and curves to be mounted in a plinth of minimum 6cm height. Available for HOBD*2 series.

KITSEBL





TPK

Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



PAUSE_72dpi



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Permanent auto pot detection



Min diameter pot detection of 9 cm



Possibility to set the maximum power absorbion of the hob



Evolution Slider totally Back-lighted ghost effect