

HOBD382MB2

Product Family Hob

Built-in type Ultra-low profile or Fully Flushed

Dimensions 83 cm
Power supply Electric

Type Induction with integrated hood

Extraction Extraction Yes

EAN code 8017709341886

Energy efficieency class (EEC) A+



Aesthetics





AestheticClassicaColourMatt BlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeStraight edgePan standsStainless steel

Double ceramization Yes

Type of control setting EVO Slider

Slider Yes

LED colours White

Control knob position Front

Logo Serigraphy colour Grey

Program / Functions



No. of induction cook zones 4

Time-setting options Spegnimento automatico

No. of cooking zones with booster

4

No. of Flexible zones

2

Main on/off switch

Power levels

7

Total no. of cook zones

4



Options

















Multizone Option Yes Flexible Zone Type MultiZone Worktop Cut-Out 490x750 mm Yes

Keep warm automatic

function

End cooking timer 4 Pause option Yes Minute minder 1 End of cooking alarm Yes Residual time indicator Yes

Limited Power **Consumption Mode**

Limited Power 2800, 3500, 4500, 7400 W

Yes

Si Advance

Consumption Mode in W

Showroom Demo Option Yes Control Lock / Child Yes

Safety

Cleaning option Yes Quick start Yes Rapid level selection Yes

Technical Features









Front-left - Induction - Multizone - 2.10 kW - Booster 3.0 kW - 21.0x19.0 cm Rear-left - Induction - Multizone - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm

Rear-right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm Front-right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm

Yes

Yes

Multizone left - Booster 3.70 kW - 39.0x21.0 cm Multizone right - Booster 3.70 kW - 39.0x21.0 cm

Automatic setting according to pan

dimension

pan detection Yes, min 9 cm

Permanent Automatic Pot Detection with indication of the relative

control

Automatic switch off

when overflow

Residual heat indicator Yes **Protection against** Yes

accidental start up

Accessories Included

Other accessories Filtering kit and charcoal

filter regenerable included

Electrical Connection

Electrical connection

7620 W

Frequency (Hz) Power supply cable 50/60 Hz

rating (W) Current

Voltage (V)

supplied

33 A

length

120 cm

Voltage 2 (V) Type of electric cable 380-415 V Yes, Single and Double

phase

220-240 V

Terminal box 6 poles Plug Not present



Controls (hood)

Hood control setting

Bianco

Touch control

Yes

Programs / Functions (hood)

Delay function

Led color

Yes 8 2

No. of speeds Intensive speed Hood time setting

Other options

Display

Delay

Kit for Recirculation and Extraction included

Automatic connection

between integrated

hood and hob

yes

Technical Features (Hood)

Free outlet maximum

650 m³/h

85.1 %

230 m³/h

500 m³/h

630 m³/h

capacity

Motor power 220 W

No. of filters

Anti-grease filters Inox

Charcoal filters included YES, regenerable

Filter replacement

indicator

68 dBA

Performance / Energy Label (hood)

Fluid Dynamic Efficiency 32.10

(FDE)

Fluid Dynamic Efficiency A

class (FDEC)

Lighting Efficiency (LE) 0.0 lux/W

Lighting Efficiency Class NA

(LEC)

Grease Filtering

Efficiency (GFE)

Grease Filtering

Efficiency Class (GFEC)

Air flow at minumum

speed (Qmin) Air flow at maximum

speed (Qmax)

Air flow at boost speed

(Qboost)

Airbourne acouistical A- 49 dBA weighted sound Power

Emission at minimum speed (SPEmin)

Airborne acoustical Aweighted sound Power **Emission at maximum**

speed (SPEmax)

Airbourne acoustical A- 73 dBA weighted sound power emission at boost speed

(SPEboost)

Time increase factor (F) **Energy Efficiency Index** 44.2

Measured air flow rate at best efficiency point

(Qbep)

Measured air pressure

(Pbep)

at best efficiency point

Measured electric power input at best efficiency point (Wbep)

Sound power level at highest setting (Lwa) 139 W

502 Pa

320 m³/h

68 dBA



Power

150 W

Speed 1		Speed 2	
Extraction rate IEC 61591	230 m³/h	Extraction rate IEC 61591	270 m³/h
Noise level IEC 60704- 2-13	49 dBA	Noise level IEC 60704- 2-13	51 dBA
Pressure	280 Pa	Pressure	370 Pa
Power	40 W	Power	50 W
Speed 3		Speed 4	
Extraction rate IEC 61591	340 m³/h	Extraction rate IEC 61591	370 m³/h
Noise level IEC 60704- 2-13	55 dBA	Noise level IEC 60704- 2-13	60 dBA
Pressure	400 Pa	Pressure	450 Pa
Power	70 W	Power	90 W
Speed 5		Speed 6	
Extraction rate IEC 61591	400 m³/h	Extraction rate IEC 61591	435 m³/h
Noise level IEC 60704- 2-13	62 dBA	Noise level IEC 60704- 2-13	63 dBA
Pressure	500 Pa	Pressure	550 Pa
Power	100 W	Power	120 W
Speed 7		Speed 8	
Extraction rate IEC 61591	460 m³/h	Extraction rate IEC 61591	500 m³/h
Noise level IEC 60704- 2-13	65 dBA	Noise level IEC 60704- 2-13	68 dBA
Pressure	600 Pa	Pressure	620 Pa

SMEG SPA 2025/12/13

Power


170 W



Intensive speed

Intensive Speed 2

Extraction rate (IEC 61591)	540 m³/h	Extraction rate IEC 61591	630 m³/h
Noise level IEC 60704- 2-13	70 dBA	Noise level IEC 60704- 2-13	73 dBA
Pressure	625 Pa	Pressure	630 Pa
Power	180 W	Power	220 W

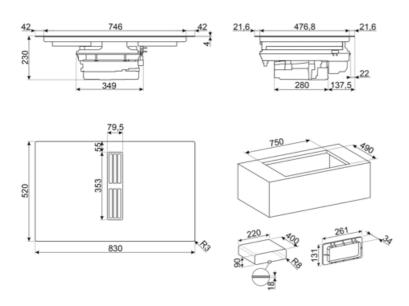



Compatible Accessories

CON60H



Flat duct connector for tubes 220*60 mm. It help to connect more tubes of the kit KITEHOBD4

CON90H

Connector for rectangular tubes high 90 mm. Size external 227*94*63 mm, internal 223*90*63 mm

FLTHOBD2





Anti Odour Filter not regenerable as spare part, suitable for recirculation mode.

GRI60H



Rectangular Louvred grille, external size 246*80 mm and internal 226*60*50 mm



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

GRIX6H



Stainless steel ventilation grille, size 426*60 mm.



KITDT50X10

tape for installation kit of HOBD*2. 10 m lenght. 50 mm width.

KITEHOBD10



Ducted kit for HOBD*2 with tubes and curve high 10 mm.



KITEHOBD4

Filtering kit (lateral outlet) optional for Hobd: tube 1,5 mt and curve






Rectangular grid used in ventilation system. It regulates the air flow from the kitchen. Suitable for HOBD*2 models.



KITRHOBD6

Mounting kit for recirculating installation: pipes and curves to be mounted in a plinth of minimum 6cm height. Available for HOBD*2 series.

KITSEBL





TPK

Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary



Permanent auto pot detection



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



This function allows you to keep cooked food warm without burner it



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Min diameter pot detection of 9 cm



Possibility to set the maximum power absorbion of the hob



Evolution Slider totally Back-lighted ghost effect