

HOBD382MB2

Product Family Hob

Built-in type Ultra-low profile or Fully Flushed

Dimensions83 cmPower supplyElectric

Type Induction with integrated hood

Extraction Extraction Yes

EAN code 8017709341886

Energy efficieency class (EEC) A+



Aesthetics





AestheticClassicaColourMatt BlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeStraight edgePan standsStainless steel

Double ceramization Yes

Type of control setting EVO Slider

Slider Yes
LED colours White
Control knob position Front
Logo Silk screen

Serigraphy colour Grey

Program / Functions



No. of induction cook zones 4

Time-setting options Spegnimento automatico

No. of cooking zones with booster 4

No. of Flexible zones 2

Main on/off switch Yes

Power levels 9

Total no. of cook zones 4

SMEG SPA 12/8/2025



Options













Yes





Multizone Option Yes Flexible Zone Type MultiZone Worktop Cut-Out 490x750 mm

Keep warm automatic

function

End cooking timer 4 Pause option Yes Minute minder 1 End of cooking alarm Yes Residual time indicator Yes

Limited Power **Consumption Mode**

Limited Power 2800, 3500, 4500, 7400 W

Si Advance

Consumption Mode in W Showroom Demo Option Yes

Control Lock / Child Yes

Safety

Cleaning option Yes Quick start Yes Rapid level selection Yes

Technical Features









Front-left - Induction - Multizone - 2.10 kW - Booster 3.0 kW - 21.0x19.0 cm Rear-left - Induction - Multizone - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm

Rear-right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm Front-right - 2.10 kW - Booster 3.00 kW - 21.0x19.0 cm

Yes

Yes

Multizone left - Booster 3.70 kW - 39.0x21.0 cm Multizone right - Booster 3.70 kW - 39.0x21.0 cm

Automatic setting according to pan

dimension

pan detection Yes, min. 9 cm

Permanent Automatic Pot Detection with indication of the relative

control

Automatic switch off when overflow

Residual heat indicator

Yes **Protection against** Yes

accidental start up

Accessories included

Other accessories Filtering kit and charcoal

filter regenerable included

Electrical Connection

Electrical connection

7620 W

Frequency (Hz) Power supply cable 50/60 Hz

rating (W)

Current

33 A

length

120 cm

Yes

Voltage (V) Voltage 2 (V)

220-240 V 380-415 V

Yes, Single and Double

Terminal box

6 poles

Type of electric cable

Plug Not present

supplied

phase

SMEG SPA 12/8/2025



Controls (hood)

Hood control setting

Led color

Touch control

Bianco

Yes

8

2

Display

Yes

Programs / Functions (hood)

Delay function

No. of speeds

Intensive speed

Hood time setting

Other options

Delay

Kit for Recirculation and Extraction included

Automatic connection between integrated

hood and hob

Yes

Technical Features (Hood)

Free outlet maximum

capacity

Motor power

No. of filters

650 m³/h

220 W

Anti-grease filters

Charcoal filters included YES, regenerable

Filter replacement

indicator

Inox

Performance / Energy Label (hood)

Fluid Dynamic Efficiency 32,10

(FDE)

Fluid Dynamic Efficiency A

class (FDEC)

Lighting Efficiency (LE) 0.0 lux/W

Lighting Efficiency Class NA

(LEC)

Grease Filtering

Efficiency (GFE)

Grease Filtering

Efficiency Class (GFEC)

Air flow at minumum speed (Qmin)

Air flow at maximum

speed (Qmax)

Air flow at boost speed

(Qboost)

85.1 %

230 m³/h

500 m³/h

630 m³/h

(Qbep)

Measured air pressure at best efficiency point

at best efficiency point

(Pbep)

Measured electric power input at best

efficiency point (Wbep)

Sound power level at highest setting (Lwa)

Airbourne acouistical A- 49 dBA weighted sound Power **Emission at minimum**

speed (SPEmin)

Airborne acoustical A-68 dBA

weighted sound Power **Emission at maximum**

speed (SPEmax)

Airbourne acoustical A- 73 dBA weighted sound power

emission at boost speed (SPEboost)

Time increase factor (F)

Energy Efficiency Index 44.2 Measured air flow rate 320 m³/h

502 Pa

139 W

68 dBA

SMEG SPA 12/8/2025



Speed 1		Speed 2	
Extraction rate IEC 61591	230 m³/h	Extraction rate IEC 61591	270 m³/h
Noise level IEC 60704- 2-13	49 dBA	Noise level IEC 60704- 2-13	51 dBA
Pressure	280 Pa	Pressure	370 Pa
Power	40 W	Power	50 W
Speed 3		Speed 4	
Extraction rate IEC 61591	340 m³/h	Extraction rate IEC 61591	370 m³/h
Noise level IEC 60704- 2-13	55 dBA	Noise level IEC 60704- 2-13	60 dBA
Pressure	400 Pa	Pressure	450 Pa
Power	70 W	Power	90 W
Speed 5		Speed 6	
Extraction rate IEC 61591	400 m³/h	Extraction rate IEC 61591	435 m³/h
Noise level IEC 60704- 2-13	62 dBA	Noise level IEC 60704- 2-13	63 dBA
Pressure	500 Pa	Pressure	550 Pa
Power	100 W	Power	120 W
Speed 7		Speed 8	
Extraction rate IEC 61591	460 m³/h	Extraction rate IEC 61591	500 m³/h
Noise level IEC 60704- 2-13	65 dBA	Noise level IEC 60704- 2-13	68 dBA
Pressure	600 Pa	Pressure	620 Pa

SMEG SPA 12/8/2025

Power

170 W

150 W


Power



Intensive speed

Intensive Speed 2

Extraction rate (IEC 61591)	540 m³/h	Extraction rate IEC 61591	630 m³/h
Noise level IEC 60704- 2-13	70 dBA	Noise level IEC 60704- 2-13	73 dBA
Pressure	625 Pa	Pressure	630 Pa
Power	180 W	Power	220 W

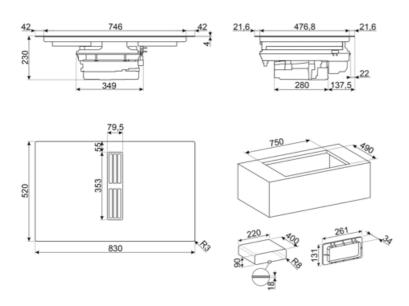

SMEG SPA 12/8/2025



Compatible Accessories

CON60H



Flat duct connector for tubes 220*60 mm. It help to connect more tubes of the kit KITEHOBD4

CON90H

Connector for rectangular tubes high 90 mm. Size external 227*94*63 mm, internal 223*90*63 mm





n.2 high-performance carbon filters regenerable up to 8 times, washing it in the dishwasher and drying it at max 70° in the oven for max 120 minutes



FLTSTDHOBD2

Anti Odour Filter not regenerable as spare part, suitable for recirculation mode.





Rectangular Louvred grille, external size 246*80 mm and internal 226*60*50 mm



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.





Stainless steel ventilation grille, size 426*60 mm.



KITDT50X10

tape for installation kit of HOBD*2. 10 m lenght. 50 mm width.





Ducted kit for HOBD*2 with tubes and curve high 10 mm.



KITEHOBD4

Filtering kit (lateral outlet) optional for Hobd: tube 1,5 mt and curve, high 60 mm



KITREBFLOW




Rectangular grid used in ventilation system, 290 x 160 mm. Backdraft Damper for for regulating the air flow from the kitchen. Compatible for HOBD*2 models.



KITRHOBD6

Mounting kit for recirculating installation: pipes and curves to be mounted in a plinth of minimum 6cm height. Available for HOBD*2 series.

KITSEBL





TPK

Stainless steel grill plate to cook Teppanyaki dishes

SMEG SPA 12/8/2025



Symbols glossary

ı	1	_	3		Ī
ı	ſ	۰	J	3	J
ı	0	-	4	IJ	١
1		1	=	"	

Permanent auto pot detection



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Evolution Slider totally Back-lighted ghost effect



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



This function allows you to keep cooked food warm without burner it



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Min diameter pot detection of 9 cm



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Possibility to set the maximum power absorbion of the hob



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.

SMEG SPA 12/8/2025