


HOBD472D

| | |
|--------------------------------|------------------------------------|
| Product Family | Hob |
| Built-in | Ultra-low profile or Fully Flushed |
| Dimensions | 70 cm |
| Power supply | Electric |
| Type | Induction with integrated hood |
| Extraction | Expulsion |
| Electronic control | Yes |
| EAN code | 8017709321079 |
| Energy efficiency class (EEC) | A++ |



Aesthetics

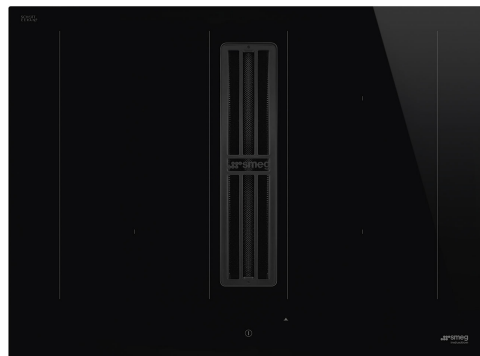

| | |
|-------------------------|--------------------|
| Aesthetics | Universal |
| Colour | Black |
| Finishing | Glass |
| Material | Glass |
| Glass Type | Ceramic |
| Glass edge | Straight edge |
| Pan stands | Enamelled flat |
| Type of control setting | Compact EVO Slider |
| Slider | Yes |
| Slider | Red |
| Control knobs position | Front |
| Serigraphy colour | Grey |

Program / Functions



| | |
|-----------------------------------|----------------------|
| No. of induction cook zones | 4 |
| Time-setting options | Automatic switch-off |
| No. of cooking zones with booster | 4 |
| No. of Flexible zones | 2 |
| Main on/off switch | Yes |
| Power levels | 9 |
| Auto-Vent 2.0 | Yes |
| Total no. of cook zones | 4 |

Options



| | | | |
|--------------------------------------|------------|--|--------------------------|
| Multizone Option | Yes | Limited Power Consumption Mode | Yes advance |
| Flexible Zone Type | MultiZone | Limited Power Consumption Mode in W | 2800, 3500, 4500, 7400 W |
| Standard cut out | 490x560 mm | Show Room Demo Option | Yes |
| Keep warm automatic function | Yes | Control Lock / Child Safety | Yes |
| End cooking timer | 4 | Bridge option | Yes |
| Pause option | Yes | Cleaning option | Yes |
| Minute minder | 1 | Quick start | Yes |
| End of cooking acoustic alarm | Yes | Rapid level selection | Yes |
| Residual time indicator | Yes | | |

Technical Features



| | | | |
|--|-----|---|-----|
| Front left - Induction - Multizone - 2.1 kW - Booster 3 kW - 22.0x19.7 cm | | | |
| Rear left - Induction - multizone - 2.1 kW - Booster 3 kW - 22.0x19.7 cm | | | |
| Rear right - 2.1 kW - Booster 3 kW - 22.0x19.7 cm | | | |
| Front right - 2.1 kW - Booster 3 kW - 22.0x19.7 cm | | | |
| Multizone left - Booster 3.70 kW - 39.5x22.0 cm | | | |
| Multizone right - Booster 3.70 kW - 39.5x22.0 cm | | | |
| Automatic setting according to pan dimension | Yes | Automatic switch off when overflow | Yes |
| Automatic pan detection | Yes | Residual heat indicator | Yes |
| Permanent Automatic Pot Detection with indication of the relative control | Yes | Protection against accidental start up | Yes |

Accessories Included

| | |
|--------------------------|--|
| Other accessories | Extraction and Filtering Kit inc tubes and Charcoal filter |
|--------------------------|--|


Electrical Connection

| | | | |
|--|------------------------------|----------------------------------|----------|
| Nominal power (W) | 7620 W | Frequency (Hz) | 50/60 Hz |
| Current | 32 A | Power supply cable length | 120 cm |
| Voltage (V) | 220-240 V | Terminal Box | 6 poles |
| Type of electric cable supplied | Yes, Single and Double phase | | |

Controls (hood)

| | | | |
|----------------------|------------------|---------|-----|
| Hood control setting | Touch Capacitive | Display | Yes |
| Led colour | Red | | |

Programs / Functions (hood)

| | | | |
|--|----------|-------------------|---------------------|
|  | | | |
| Delay function | Yes | Hood time setting | Delay |
| No. of speeds | 9 | Other options | Filter Kit included |
| Intensive speed | 2 | Auto-Vent | Yes |
| Other functions | AUTOVENT | | |

Technical Features (Hood)

| | | | |
|---------------------|-----------|------------------------------|------------------|
| Motor power | 220 W | Charcoal filters included | YES, regenerable |
| No. of filters | 1 | Filter replacement indicator | Yes |
| Anti-grease filters | Aluminium | | |

Performance / Energy Label (hood)

| | | | |
|--|-----------|--|----------|
| Fluid Dynamic Efficiency (FDE) | 37,60 | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 49 dBA |
| Fluid Dynamic Efficiency class (FDEC) | A | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 65 dBA |
| Lighting Efficiency (LE) | 0,0 lux/W | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 71 dBA |
| Lighting Efficiency Class (LEC) | NA | Time increase factor (F) | 0,6 |
| Grease Filtering Efficiency (GFE) | 75,1 % | Energy Efficiency Index per first cavity | 32,9 |
| Grease Filtering Efficiency Class (GFEC) | C | Measured air flow rate at best efficiency point (Qbep) | 326 m³/h |
| Air flow at minumum speed (Qmin) | 230 m³/h | Measured air pressure at best efficiency point (Qbep) | 548 Pa |
| AIR FLOW AT MAXIMUM SPEED (QMAX) | 500 m³/h | Measured electric power input at best efficiency point (Wbep) | 132 W |
| Air flow at boost speed (Qboost) | 630 m³/h | Sound power level at highest setting (Lwa) | 65 dBA |

Speed 1

| | |
|----------------------------|----------|
| Extraction rate IEC 61591 | 230 m³/h |
| Noise level IEC 60704-2-13 | 49 dBA |
| Pressure | 280 Pa |
| Power | 40 W |

Speed 2

| | |
|----------------------------|----------|
| Extraction rate IEC 61591 | 270 m³/h |
| Noise level IEC 60704-2-13 | 51 dBA |
| Pressure | 370 Pa |
| Power | 50 W |

Speed 3

| | |
|----------------------------|----------|
| Extraction rate IEC 61591 | 310 m³/h |
| Noise level IEC 60704-2-13 | 55 dBA |
| Pressure | 500 Pa |
| Power | 60 W |

Speed 4

| | |
|----------------------------|----------|
| Extraction rate IEC 61591 | 350 m³/h |
| Noise level IEC 60704-2-13 | 57 dBA |
| Pressure | 570 Pa |
| Power | 75 W |

Speed 5

| | |
|----------------------------|----------|
| Extraction rate IEC 61591 | 380 m³/h |
| Noise level IEC 60704-2-13 | 60 dBA |
| Pressure | 580 Pa |
| Power | 85 W |

Speed 6

| | |
|----------------------------|----------|
| Extraction rate IEC 61591 | 415 m³/h |
| Noise level IEC 60704-2-13 | 62 dBA |
| Pressure | 590 Pa |
| Power | 100 W |

Speed 7

| | |
|----------------------------|----------|
| Extraction rate IEC 61591 | 440 m³/h |
| Noise level IEC 60704-2-13 | 63 dBA |
| Pressure | 600 Pa |
| Power | 110 W |

Speed 8


| | |
|----------------------------|----------|
| Extraction rate IEC 61591 | 470 m³/h |
| Noise level IEC 60704-2-13 | 64 dBA |
| Pressure | 610 Pa |
| Power | 115 W |

Speed 9

| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 500 m ³ /h |
| Noise level IEC 60704-2-13 | 65 dBA |
| Pressure | 620 Pa |
| Power | 125 W |

Intensive Speed 2

| | |
|----------------------------|-----------------------|
| Extraction rate IEC 61591 | 630 m ³ /h |
| Noise level IEC 60704-2-13 | 71 dBA |
| Pressure | 630 Pa |
| Power | 220 W |

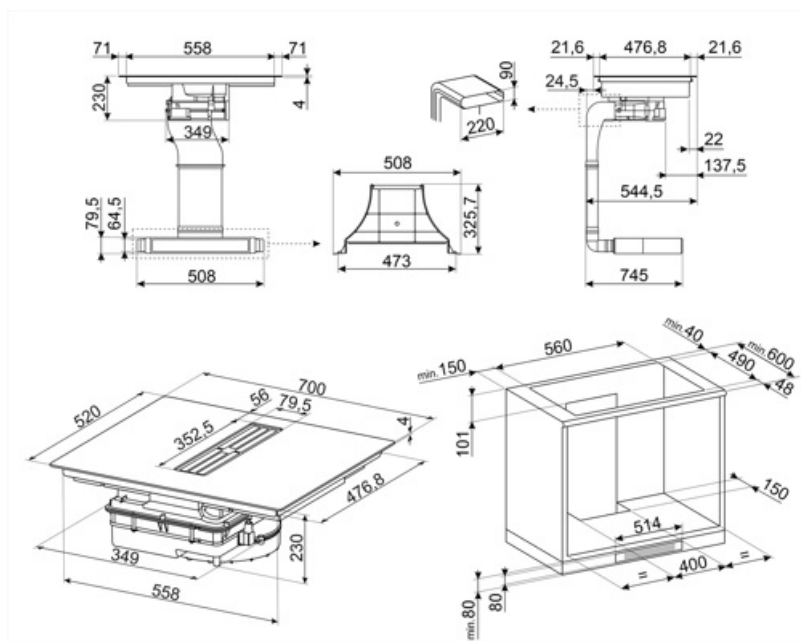

Compatible Accessories



CON60H

Flat duct connector for tubes 220*60 mm. It helps to connect more tubes of the kit KITEHOB4



GRI60H

Rectangular Louvred grille, external size 246*80 mm and internal 226*60*50 mm



KITEHOB4

Filtering kit (lateral outlet) optional for Hobd: tube 1,5 mt and curve



RED60H

Reducer from 90 to 60 mm suitable for rectangular tube of 220 mm. Size: 220x90x92 mm



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.




FLTHOBD4S

Charcoal Anti Odour Filter regenerable as spare part suitable for HOBD472D



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



KITF6HOB4S



















Recirculating kit for Hobd: tubes + regenerable anti-odor filter + grid in stainless steel with magnetics fix (easy to remove) that fit in a plinth of min. 6 cm



TPK

Stainless steel grill plate to cook Teppanyaki dishes

Symbols glossary

| | | | |
|--|--|---|---|
|  | ... |  | ... |
|  | A smart infrared system, which allows a hood and hob with this feature to work together. |  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | Compact Slider back-lighted ghost effect |
|  | The slider control panel allows you to adjust the power simply by passing your finger across the touch device. |  | Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically. |
|  | Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility |  | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids. |
|  | PAUSE_72dpi |  | ... |
|  | Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth). |  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |  | Time elapsed: shows how long the cooking zone has been in use. |
|  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. |  | TWIN_ZONE_72dpi |