


# HOBD472D

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	70 cm
Power supply	Electric
Type	Induction with integrated hood
Extraction	Extraction
Electronic control	Yes
EAN code	8017709321079
Energy efficiency class ( EEC)	A++



## Aesthetics

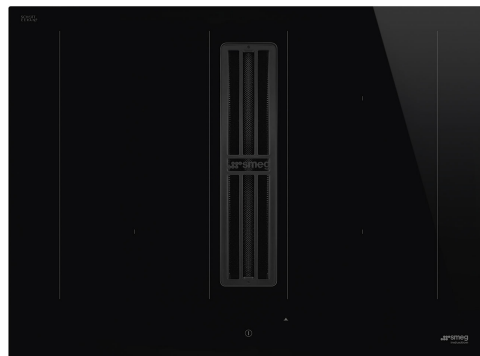

Aesthetic	Universale
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Pan stands	Enamelled flat
Type of control setting	Compact Slider Plus
Slider	Yes
LED colours	Red
Control knob position	Front
Serigraphy colour	Grey

## Program / Functions



No. of induction cook zones	4
Time-setting options	Spegnimento automatico
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	9
Auto-vent 2.0	Yes
Total no. of cook zones	4

## Options



<b>Multizone Option</b>	Yes	<b>Limited Power Consumption Mode</b>	Si Advance
<b>Flexible Zone Type</b>	MultiZone	<b>Limited Power Consumption Mode in W</b>	2800, 3500, 4500, 7400 W
<b>Worktop Cut-Out</b>	490x560 mm	<b>Showroom Demo Option</b>	Yes
<b>Keep warm automatic function</b>	Yes	<b>Control Lock / Child Safety</b>	Yes
<b>End cooking timer</b>	4	<b>Bridge option</b>	Yes
<b>Pause option</b>	Yes	<b>Cleaning option</b>	Yes
<b>Minute minder</b>	1	<b>Quick start</b>	Yes
<b>End of cooking alarm</b>	Yes	<b>Rapid level selection</b>	Yes
<b>Residual time indicator</b>	Yes		

## Technical Features



<b>Front-left - Induction - Multizone</b>	2.1 kW - Booster 3 kW - 22.0x19.7 cm	<b>Automatic setting according to pan dimension</b>	Yes	<b>Automatic switch off when overflow</b>	Yes
<b>Rear-left - Induction - Multizone</b>	2.1 kW - Booster 3 kW - 22.0x19.7 cm	<b>pan detection</b>	Yes	<b>Residual heat indicator</b>	Yes
<b>Rear-right - 2.1 kW - Booster 3 kW</b>	22.0x19.7 cm	<b>Permanent Automatic</b>	Yes	<b>Protection against accidental start up</b>	Yes
<b>Front-right - 2.1 kW - Booster 3 kW</b>	22.0x19.7 cm	<b>Pot Detection with indication of the relative control</b>			
<b>Multizone left - Booster 3.70 kW</b>	39.5x22.0 cm				
<b>Multizone right - Booster 3.70 kW</b>	39.5x22.0 cm				

## Accessories included

<b>Other accessories</b>	Extraction and Filtering (tubes and Charcoal filter) included
--------------------------	---


## Electrical Connection

<b>Plug</b>	Not present	<b>Type of electric cable supplied</b>	Yes, Single and Double phase
<b>Electrical connection rating (W)</b>	7620 W	<b>Frequency (Hz)</b>	50/60 Hz
<b>Current</b>	32 A	<b>Power supply cable length</b>	120 cm
<b>Voltage (V)</b>	220-240 V	<b>Terminal box</b>	6 poles

## Controls (hood)

Hood control setting	Touch Capacitive	Display	Yes
Led color	Rosso		

## Programs / Functions (hood)

			
Delay function	Yes	Hood time setting	Delay
No. of speeds	9	Other options	Filter Kit included
Intensive speed	2	Auto-Vent	Yes
Other functions	AUTOVENT		

## Technical Features (Hood)

Motor power	220 W	Charcoal filters included	YES, regenerable
No. of filters	1	Filter replacement indicator	Yes
Anti-grease filters	Alluminio		

## Performance / Energy Label (hood)

Fluid Dynamic Efficiency (FDE)	37,60	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	49 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Lighting Efficiency (LE)	0,0 lux/W	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Lighting Efficiency Class (LEC)	NA	Time increase factor (F)	0,6
Grease Filtering Efficiency (GFE)	75,1 %	Energy Efficiency Index	32,9
Grease Filtering Efficiency Class (GFEC)	C	Measured air flow rate at best efficiency point (Qbep)	326 m³/h
Air flow at minumum speed (Qmin)	230 m³/h	Measured air pressure at best efficiency point (Pbep)	548 Pa
Air flow at maximum speed (Qmax)	500 m³/h	Measured electric power input at best efficiency point (Wbep)	132 W
Air flow at boost speed (Qboost)	630 m³/h	Sound power level at highest setting (Lwa)	65 dBA

## Speed 1

Extraction rate IEC 61591	230 m <sup>3</sup> /h
Noise level IEC 60704-2-13	49 dBA
Pressure	280 Pa
Power	40 W

## Speed 2

Extraction rate IEC 61591	270 m <sup>3</sup> /h
Noise level IEC 60704-2-13	51 dBA
Pressure	370 Pa
Power	50 W

## Speed 3

Extraction rate IEC 61591	310 m <sup>3</sup> /h
Noise level IEC 60704-2-13	55 dBA
Pressure	500 Pa
Power	60 W

## Speed 4

Extraction rate IEC 61591	350 m <sup>3</sup> /h
Noise level IEC 60704-2-13	57 dBA
Pressure	570 Pa
Power	75 W

## Speed 5

Extraction rate IEC 61591	380 m <sup>3</sup> /h
Noise level IEC 60704-2-13	60 dBA
Pressure	580 Pa
Power	85 W

## Speed 6

Extraction rate IEC 61591	415 m <sup>3</sup> /h
Noise level IEC 60704-2-13	62 dBA
Pressure	590 Pa
Power	100 W

## Speed 7

Extraction rate IEC 61591	440 m <sup>3</sup> /h
Noise level IEC 60704-2-13	63 dBA
Pressure	600 Pa
Power	110 W

## Speed 8


Extraction rate IEC 61591	470 m <sup>3</sup> /h
Noise level IEC 60704-2-13	64 dBA
Pressure	610 Pa
Power	115 W

## Speed 9

Extraction rate IEC 61591	500 m <sup>3</sup> /h
Noise level IEC 60704-2-13	65 dBA
Pressure	620 Pa
Power	125 W

## Intensive Speed 2

Extraction rate IEC 61591	630 m <sup>3</sup> /h
Noise level IEC 60704- 2-13	71 dBA
Pressure	630 Pa
Power	220 W

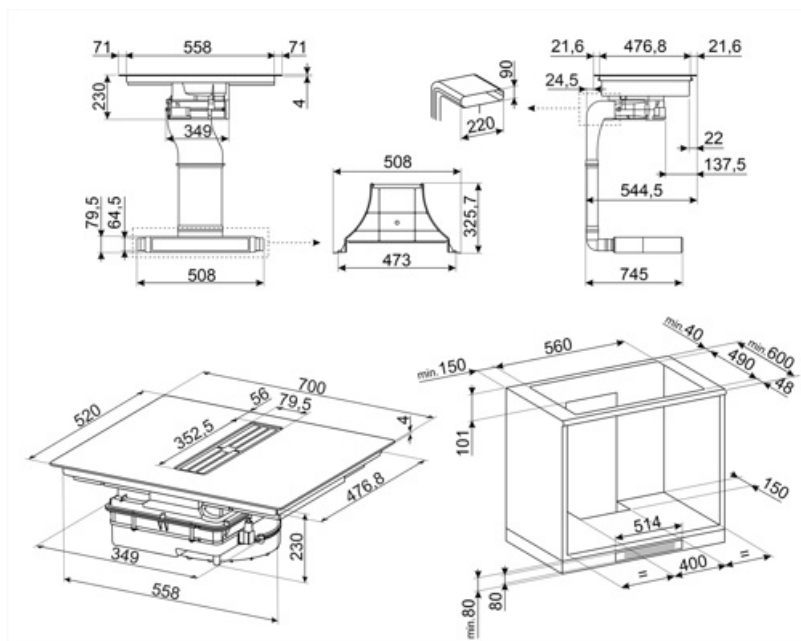

## Compatible Accessories



### CON60H

Flat duct connector for tubes 220\*60 mm. It help to connect more tubes of the kit KITEHOB4



### GRI60H

Rectangular Louvred grille, external size 246\*80 mm and internal 226\*60\*50 mm



### KITEHOB4

Filtering kit (lateral outlet) optional for Hobd: tube 1,5 mt and curve, high 60 mm



### RED60H

Reducer from 90 to 60 mm suitable for rectangular tube of 220 mm. Size: 220x90x92 mm



### TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.




### FLTHOBD4S

Charcoal Anti Odour Filter regenerable as spare part suitable for HOBD472D



### GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



### KITF6HOB4



















Recirculating kit for Hobd: tubes + regenerable anti-odor filter + grid in stainless steel with magnetics fix (easy to remove) that fit in a plinth of min. 6 cm. The ceramic filter can be regenerate up to 10 times by putting it inside the oven at 250° for 1 hour.



### TPK

Stainless steel grill plate to cook Teppanyaki dishes

## Symbols glossary

	Permanent auto pot detection		Connection between hob and hood
	A smart infrared system, which allows a hood and hob with this feature to work together.		Power booster: option allows the zone to work at full power when very intense cooking is necessary.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		Compact Slider back-lighted ghost effect
	The slider control panel allows you to adjust the power simply by passing your finger across the touch device.		This function allows you to keep cooked food warm without burner it
	Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility		Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.
	All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.		Possibility to set the maximum power absorption of the hob
	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		TWIN_ZONE_72dpi

---

## Benefit (TT)

---

### **Induction hobs**

Fast cooking and precise temperature control

### **Glass**

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space

### **Ceramic**

Stability and design even up to 700 °C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use

### **Enamelled flat**

Shock resistance ensured by durable materials and design, with dishwasher-safe surfaces and Made in Italy quality for long-lasting practicality

Immediate access to functions via touch display, for simple and intuitive control

### **Control knob position frontal**

Instant and intuitive control thanks to front controls, easily accessible for practical use

### **Keep Warm function**

Dishes always served at the right temperature, even after cooking, thanks to the Keep Warm function

Nine power levels and Boost function for optimal cooking performance

### **MultiZone**

Large surface created by joining two contiguous zones, perfect for large dishes

In addition to their sleek aesthetics and contemporary design, Smeg induction hobs are equipped with innovative technologies. The Multizone function guarantees maximum flexibility in the use of the hob and endless cooking possibilities, expanding the cooking area to suit the shape and size of different pans.

### **Permanent Automatic Pot Detection with indication of the relative control**

Automatic activation of the correct cooking zone with Autopot Detection, recognizing the pot without user intervention

### **Auto-vent 2.0**

Cooktop and hood connected via Bluetooth for synchronized and automatic operation



Greater comfort even after cooking: the Delay function automatically turns off the hood after the set time, removing odors and humidity