

# HOBD472D

Product Family Hob

Built-in type Ultra-low profile or Fully Flushed

Dimensions 70 cm
Power supply Electric

Type Induction with integrated hood

Extraction Extraction
Electronic control Yes

EAN code 8017709321079

Energy efficieency class (EEC) A++



#### **Aesthetics**





Aesthetic Universale
Colour Black
Finishing Glass
Material Glass
Glass type Ceramic
Glass edge Straight edge
Pan stands Enamelled flat

Type of control setting Compact Slider Plus

Slider Yes
LED colours Red
Control knob position Front
Logo Silk screen
Serigraphy colour Grey

## **Program / Functions**





No. of induction cook zones

Time-setting options Spegnimento automatico

No. of cooking zones with booster

4
No. of Flexible zones

2
Main on/off switch

Power levels

4
Yes

Auto-vent 2.0

Total no. of cook zones

4



## **Options**

















**Multizone Option** Yes Flexible Zone Type MultiZone Worktop Cut-Out 490x560 mm Yes

Keep warm automatic

function

End cooking timer 4 Pause option Yes Minute minder 1 End of cooking alarm Yes Residual time indicator Yes

**Limited Power** Si Advance Consumption Mode

**Limited Power** 2800, 3500, 4500, 7400 W

Yes

Consumption Mode in W Showroom Demo Option Yes Control Lock / Child Yes

Safety

Bridge option Yes Cleaning option Yes Quick start Yes Rapid level selection Yes

### **Technical Features**







Front-left - Induction - Multizone - 2.1 kW - Booster 3 kW - 22.0x19.7 cm Rear-left - Induction - Multizone - 2.1 kW - Booster 3 kW - 22.0x19.7 cm

Rear-right - 2.1 kW - Booster 3 kW - 22.0x19.7 cm Front-right - 2.1 kW - Booster 3 kW - 22.0x19.7 cm Multizone left - Booster 3.70 kW - 39.5x22.0 cm Multizone right - Booster 3.70 kW - 39.5x22.0 cm

**Automatic setting** according to pan

dimension

pan detection Yes **Permanent Automatic** Yes Pot Detection with

indication of the relative control

Yes

Automatic switch off when overflow

Residual heat indicator Yes **Protection against** Yes

accidental start up

## Accessories included

Other accessories **Extraction and Filtering** (tubes and Charcoal filter)

Yes, Single and Double

included

### **Electrical Connection**

**Electrical connection** 

rating (W)

7620 W

Frequency (Hz) Power supply cable length

50/60 Hz 120 cm

Current Voltage (V) 32 A 220-240 V

Terminal box

6 poles

Type of electric cable supplied

phase

Plug

Not present



## Controls (hood)

Hood control setting

**Touch Capacitive** 

Led color

Rosso

Display

Yes

## **Programs / Functions (hood)**

**Delay function** Yes

No. of speeds 9 2 Intensive speed

Other functions **AUTOVENT**  Hood time setting Delay

Other options Filter Kit included

Auto-Vent Yes

## **Technical Features (Hood)**

Motor power 220 W No. of filters 1

Anti-grease filters Alluminio Charcoal filters included YES, regenerable

Filter replacement

indicator

Yes

## Performance / Energy Label (hood)

Fluid Dynamic Efficiency 37,60

(FDE)

Fluid Dynamic Efficiency A

class (FDEC)

Lighting Efficiency (LE) 0.0 lux/W

Lighting Efficiency Class NA

(LEC)

**Grease Filtering** 75,1 %

Efficiency (GFE)

**Grease Filtering** 

Efficiency Class (GFEC)

Air flow at minumum 230 m<sup>3</sup>/h

speed (Qmin)

Air flow at maximum 500 m<sup>3</sup>/h

speed (Qmax)

Air flow at boost speed 630 m<sup>3</sup>/h

(Qboost)

Airbourne acouistical A- 49 dBA weighted sound Power

Emission at minimum speed (SPEmin)

Airborne acoustical A-65 dBA

weighted sound Power **Emission at maximum** speed (SPEmax)

Airbourne acoustical A- 71 dBA weighted sound power

emission at boost speed

(SPEboost)

Time increase factor (F) **Energy Efficiency Index** 32.9 Measured air flow rate 326 m<sup>3</sup>/h

at best efficiency point

(Qbep)

Measured air pressure

at best efficiency point

(Pbep) Measured electric

power input at best efficiency point (Wbep)

Sound power level at highest setting (Lwa)

132 W

548 Pa

65 dBA



Speed 1 Speed 2

**Extraction rate IEC** 230 m<sup>3</sup>/h **Extraction rate IEC** 270 m<sup>3</sup>/h 61591 61591

Noise level IEC 60704-49 dBA Noise level IEC 60704-51 dBA 2-13 2-13

**Pressure** 280 Pa **Pressure** 370 Pa Power 40 W Power 50 W

Speed 3 Speed 4

**Extraction rate IEC** 310 m<sup>3</sup>/h **Extraction rate IEC** 350 m<sup>3</sup>/h 61591 61591

Noise level IEC 60704-55 dBA Noise level IEC 60704-57 dBA

2-13 2-13 500 Pa 570 Pa **Pressure Pressure** 60 W 75 W Power Power

Speed 6 Speed 5

**Extraction rate IEC** 380 m<sup>3</sup>/h **Extraction rate IEC** 415 m<sup>3</sup>/h 61591 61591 Noise level IEC 60704-60 dBA Noise level IEC 60704-62 dBA 2-13 2-13

590 Pa **Pressure** 580 Pa **Pressure** 85 W Power Power 100 W

Speed 7 Speed 8

**Extraction rate IEC** 440 m<sup>3</sup>/h **Extraction rate IEC** 470 m<sup>3</sup>/h 61591 61591

Noise level IEC 60704-63 dBA Noise level IEC 60704-64 dBA

2-13 2-13 **Pressure** 600 Pa **Pressure** 610 Pa Power 110 W Power 115 W

Speed 9

61591

**Extraction rate IEC** 500 m<sup>3</sup>/h

Noise level IEC 60704-65 dBA

2-13 Pressure 620 Pa 125 W Power



# **Intensive Speed 2**

Extraction rate IEC 61591

630 m<sup>3</sup>/h

Noise level IEC 60704-


71 dBA

2-13

630 Pa

**Pressure** 

220 W

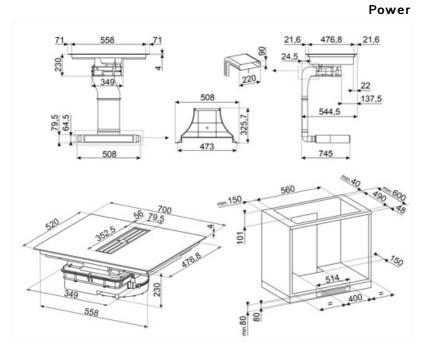



## **Compatible Accessories**

#### CON60H



Flat duct connector for tubes 220\*60 mm. It help to connect more tubes of the kit KITEHOBD4

#### FLTHOBD4S

Charcoal Anti Odour Filter regenerable as spare part suitable for HOBD472D

#### GRI60H



Rectangular Louvred grille, external size 246\*80 mm and internal 226\*60\*50 mm



#### GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

#### KITF6H0BD



Filtering kit (lateral outlet) optional for Hobd: tube 1,5 mt and curve, high 60



Recirculating kit for Hobd: tubes + regenerable anti-odor filter + grid in stainless steel with magnetics fix (easy to remove) that fit in a plinth of min. 6 cm. The ceramic filter can be regenerate up to 10 times by putting it inside the oven at 250° for 1 hour.


#### RED60H

KITEHOBD4



Reducer from 90 to 60 mm suitable for rectangular tube of 220 mm. Size: 220x90x92 mm





#### **TPKPLATE**



Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



## Symbols glossary

1	7	9	7
(	•	) :	v
0	ب	(2)	,
١~	$\overline{}$	2)	•

Permanent auto pot detection



Connection between hob and hood



A smart infrared system, which allows a hood and hob with this feature to work together.



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



This function allows you to keep cooked food warm without burner it



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



TWIN\_ZONE\_72dpi



Possibility to set the maximum power absorbion of the hob



Compact Slider back-lighted ghost effect