


# HOB472D2

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	70 cm
Power supply	Electric
Type	Induction with integrated hood
Extraction	Extraction
Electronic control	Yes
EAN code	8017709341862
Energy efficiency class ( EEC)	A+



## Aesthetics

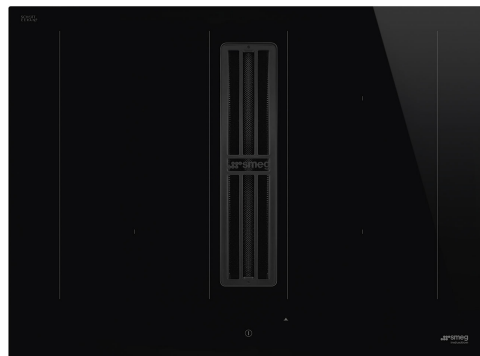

Aesthetic	Universale
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Pan stands	Stainless steel
Type of control setting	EVO Slider
Slider	Yes
LED colours	Red
Control knob position	Front
Serigraphy colour	Grey

## Programme / Functions



Total no. of cook zones	4
No. of induction cook zones	4
Time-setting options	Spegnimento automatico
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	9
Auto-vent 2.0	Yes

## Options



<b>Multizone Option</b>	Yes	<b>Limited Power Consumption Mode</b>	Si Advance
<b>Flexible Zone Type</b>	MultiZone	<b>Limited Power Consumption Mode in W</b>	2800, 3500, 4500, 7400 W
<b>Worktop Cut-Out</b>	490x560 mm	<b>Showroom Demo Option</b>	Yes
<b>Keep warm automatic function</b>	Yes	<b>Control Lock / Child Safety</b>	Yes
<b>End cooking timer</b>	4	<b>Bridge option</b>	Yes
<b>Pause option</b>	Yes	<b>Cleaning option</b>	Yes
<b>Minute minder</b>	1	<b>Quick start</b>	Yes
<b>End of cooking alarm</b>	Yes	<b>Rapid level selection</b>	Yes
<b>Residual time indicator</b>	Yes		

## Technical Features



Front-left - 2.10 kW - Booster 3.00 kW - 21.0X19.0 cm  
 Rear-left - 2.10 kW - Booster 3.00 kW - 21.0X19.0 cm  
 Rear-right - 2.10 kW - Booster 3.00 kW - 21.0X19.0 cm  
 Front-right - 2.10 kW - Booster 3.00 kW - 21.0X19.0 cm  
 Multizone left - Booster 3.70 kW - 39.5x22.0 cm  
 Multizone right - Booster 3.70 kW - 39.5x22.0 cm

<b>Automatic setting according to pan dimension</b>	Yes	<b>Automatic switch off when overflow</b>	Yes
<b>pan detection</b>	Yes, min 9 cm	<b>Residual heat indicator</b>	Yes
<b>Permanent Automatic Pot Detection with indication of the relative control</b>	Yes	<b>Protection against accidental start up</b>	Yes

## Accessories Included

<b>Other accessories</b>	Filtering kit and charcoal filter regenerable included
--------------------------	--

## Electrical Connection

<b>Electrical connection rating (W)</b>	7620 W	<b>Type of electric cable supplied</b>	Universal
<b>Current</b>	33 A	<b>Frequency (Hz)</b>	50/60 Hz
<b>Voltage (V)</b>	220-240 V	<b>Power supply cable length</b>	120 cm
<b>Voltage 2 (V)</b>	380-415 V	<b>Terminal box</b>	6 poles
<b>Type of electric cable installed</b>	Universal		

## Controls (hood)

Hood control setting	Touch Capacitive	Display	Yes
Led color	Rosso		

## Programs / Functions (hood)

			
No. of speeds	8	Other options	Filter Kit included
Intensive speed	2	Auto-Vent	Yes
Hood time setting	Delay		

## Technical Features (Hood)

Free outlet maximum capacity	650 m³/h	Anti-grease filters	Alluminio
Motor power	220 W	Charcoal filters included	YES, regenerable
No. of filters	1	Filter replacement indicator	Yes

## Performance / Energy Label (hood)

Fluid Dynamic Efficiency (FDE)	32,10	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	68 dB(A)
Fluid Dynamic Efficiency class (FDEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dB(A)
Lighting Efficiency (LE)	0,0 lux/W	Power Consumption in Off mode (Po)	0,49 W
Lighting Efficiency Class (LEC)	NA	Time increase factor (F)	0,8
Grease Filtering Efficiency (GFE)	85,1 %	Energy Efficiency Index	44,2
Grease Filtering Efficiency Class (GFEC)	B	Measured air flow rate at best efficiency point (Qbep)	320 m³/h
Air flow at minumum speed (Qmin)	230 m³/h	Measured air pressure at best efficiency point (Pbep)	502 Pa
Air flow at maximum speed (Qmax)	500 m³/h	Measured electric power input at best efficiency point (Wbep)	139 W
Air flow at boost speed (Qboost)	630 m³/h	Sound power level at highest setting (Lwa)	68 dB(A)
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	49 dB(A)		

## Speed 1

Extraction rate IEC 61591	230 m³/h
Noise level IEC 60704-2-13	49 dB(A)
Pressure	280 Pa
Power	40 W

## Speed 2

Extraction rate IEC 61591	270 m³/h
Noise level IEC 60704-2-13	51 dB(A)
Pressure	370 Pa
Power	50 W

## Speed 3

Extraction rate IEC 61591	340 m³/h
Noise level IEC 60704-2-13	51 dB(A)
Pressure	400 Pa
Power	70 W

## Speed 4

Extraction rate IEC 61591	370 m³/h
Noise level IEC 60704-2-13	60 dB(A)
Pressure	570 Pa
Power	90 W

## Speed 5

Extraction rate IEC 61591	400 m³/h
Noise level IEC 60704-2-13	62 dB(A)
Pressure	500 Pa
Power	100 W

## Speed 6

Extraction rate IEC 61591	435 m³/h
Noise level IEC 60704-2-13	63 dB(A)
Pressure	550 Pa
Power	120 W

## Speed 7

Extraction rate IEC 61591	460 m³/h
Noise level IEC 60704-2-13	65 dB(A)
Pressure	600 Pa
Power	150 W

## Speed 8






Extraction rate IEC 61591	500 m³/h
Noise level IEC 60704-2-13	68 dB(A)
Pressure	620 Pa
Power	170 W

## Intensive speed

Extraction rate (IEC 61591)	540 m³/h
Noise level IEC 60704-2-13	70 dB(A)
Pressure	625 Pa
Power	180 W

## Intensive Speed 2

Extraction rate IEC 61591	630 m³/h
Noise level IEC 60704-2-13	73 dB(A)
Pressure	630 Pa
Power	220 W

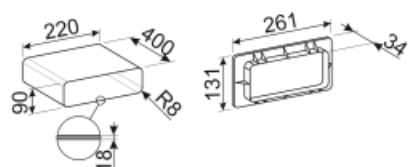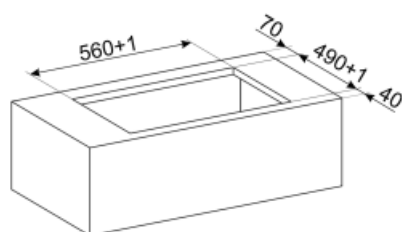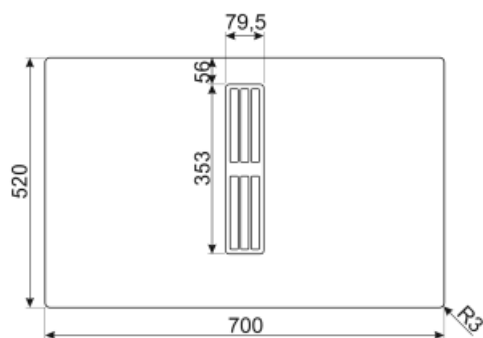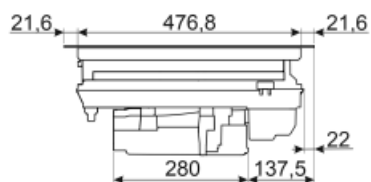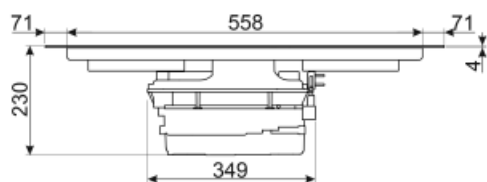

## Not included accessories



### GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



### CON60H

Flat duct connector for tubes 220\*60 mm. It help to connect more tubes of the kit KITEHOB4




### GRI60H

Rectangular Louvred grille, external size 246\*80 mm and internal 226\*60\*50 mm



### TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



### FLTHOBD2

### RED60H

Reducer from 90 to 60 mm



### TPK




















Stainless steel grill plate to cook Teppanyaki dishes



### KITEHOB4

Filtering kit (lateral outlet) optional for Hobd: tube 1,5 mt and curve

## Symbols glossary (TT)

	A smart infrared system, which allows a hood and hob with this feature to work together.		Power booster: option allows the zone to work at full power when very intense cooking is necessary.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		The slider control panel allows you to adjust the power simply by passing your finger across the touch device.
	This function allows you to keep cooked food warm without burner it		Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.		All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.
	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		TWIN_ZONE_72dpi
	Permanent auto pot detection		Connection between hob and hood
	Min diameter pot detection of 9 cm		Possibility to set the maximum power absorbion of the hob
	Evolution Slider totally Back-lighted ghost effect		