


HOB472D2

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	70 cm
Power supply	Electric
Type	Indução com exaustor integrado
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
EAN code	8017709341862
Energy efficiency class (EEC)	A+

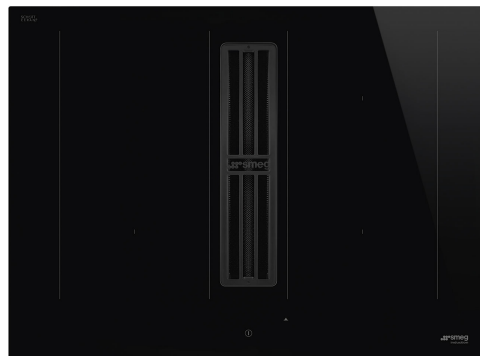

Aesthetics

	
Aesthetic	Universal
Colour	Black
Acabamento	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Glass on Steel	No
Frame	No
Pan stands	Stainless steel
Type of control setting	Controle de toque retroiluminado Branco
Slider	Yes
Comandos Slider	Vermelho
Control knob position	Front
Serigraphy colour	Grey
Alternative colours available	No

Program / Functions

	
No. of induction cook zones	4
Time-setting options	Spegnimento automatico
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	9

Total no. of cook zones

4

Options



Multizone Option Yes

Tipo de zona flexível MultiZone

Corte padrão 490x560 mm

Auto-boiling Function No

Keep warm automatic function Yes

Função de grelha No

End cooking timer 4

Pause option Yes

Minute minder 1

End of cooking alarm Yes

Residual time indicator Yes

Limited Power Sim Adiantamento

Consumption Mode

Limited Power 2800, 3500, 4500, 7400 W

Consumption Mode in W

Showroom Demo Option Yes

Control Lock / Child Safety Yes

Bridge option Yes

Cleaning option Yes

Quick start Yes

Rapid level selection Yes

Technical Features



Front-left - 2.10 kW - Booster 3.00 kW - 21.0X19.0 cm

Rear-left - 2.10 kW - Booster 3.00 kW - 21.0X19.0 cm

Rear-right - 2.10 kW - Booster 3.00 kW - 21.0X19.0 cm

Front-right - 2.10 kW - Booster 3.00 kW - 21.0X19.0 cm

Multizone left - Booster 3.70 kW - 39.5x22.0 cm

Multizone right - Booster 3.70 kW - 39.5x22.0 cm

Automatic setting according to pan dimension Yes

pan detection Sim, mín. 9 cm

Detecção Automática Yes

Permanente de Pote

com indicação do

controle relativo

Automatic switch off No

when overheat

Automatic switch off when overflow Yes

Residual heat indicator Yes

Protection against Yes

accidental start up

Accessories Included

Tube reduction No

Other accessories Filtering kit and charcoal filter regenerable included

Sliding door No

Remote control No

Tube reduction No

Electrical Connection

Plug No

Type of electric cable supplied Yes, Single and Double phase

Electrical connection rating (W)	7620 W	Frequency (Hz)	50/60 Hz
Current	33 A	Comprimento do cabo de alimentação	120 cm
Voltage (V)	220-240 V	Placa de bornes	6 polos
Voltage 2 (V)	380-415 V	Ficha elétrica	No

Controles (exaustor)

Configuração de controle do exaustor	Capacidade de Toque	Display	Yes
Led color	Rosso		

Programas/Funções (exaustor)

Delay function	Yes	Configuração do tempo do exaustor	Atraso
No. of speeds	8	Other options	Filter Kit included
Intensive speed	2	Ventilação automática	yes
24h air filter function	No		

Características técnicas (exaustor)

Remote motor	No	Anti-grease filters	Inox
Free outlet maximum capacity	650 m³/h	Charcoal filters included	SIM, regenerável
Motor power	220 W	Filter replacement indicator	Yes
No. of filters	1	Non return valve	No

Etiqueta de desempenho/Energia (exaustor)

Fluid Dynamic Efficiency (FDE)	32.10	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	49 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	68 dBA
Lighting Efficiency (LE)	0.0 lux/W	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dBA
Lighting Efficiency Class (LEC)	NA	Time increase factor (F)	0.8
Grease Filtering Efficiency (GFE)	85.1 %	Energy Efficiency Index	44.2
Grease Filtering Efficiency Class (GFEC)	B	Measured air flow rate at best efficiency point (Qbep)	320 m³/h
Air flow at minumum speed (Qmin)	230 m³/h	Measured air pressure at best efficiency point (Pbep)	502 Pa
Air flow at maximum speed (Qmax)	500 m³/h		
Air flow at boost speed (Qboost)	630 m³/h		

Measured electric power input at best efficiency point (Wbep) 139 W
Sound power level at highest setting (Lwa) 68 dBA

Speed 1

Extraction rate IEC 61591 230 m³/h
Noise level IEC 60704-2-13 49 dBA
Pressure 280 Pa
Power 40 W

Speed 2

Extraction rate IEC 61591 270 m³/h
Noise level IEC 60704-2-13 51 dBA
Pressure 370 Pa
Power 50 W

Speed 3

Extraction rate IEC 61591 340 m³/h
Noise level IEC 60704-2-13 51 dBA
Pressure 400 Pa
Power 70 W

Speed 4

Extraction rate IEC 61591 370 m³/h
Noise level IEC 60704-2-13 60 dBA
Pressure 570 Pa
Power 90 W

Velocidade 5

Extraction rate IEC 61591 400 m³/h
Noise level IEC 60704-2-13 62 dBA
Pressure 500 Pa
Power 100 W

Velocidade 6

Extraction rate IEC 61591 435 m³/h
Noise level IEC 60704-2-13 63 dBA
Pressure 550 Pa
Power 120 W

Velocidade 7

Extraction rate IEC 61591 460 m³/h
Noise level IEC 60704-2-13 65 dBA
Pressure 600 Pa
Power 150 W

Velocidade 8


Extraction rate IEC 61591 500 m³/h
Noise level IEC 60704-2-13 68 dBA
Pressure 620 Pa
Power 170 W

Intensive speed

Extraction rate (IEC 61591)	540 m ³ /h
Noise level IEC 60704-2-13	70 dBA
Pressure	625 Pa
Power	180 W

Velocidade Intensiva 2

Extraction rate IEC 61591	630 m ³ /h
Noise level IEC 60704-2-13	73 dBA
Pressure	630 Pa
Power	220 W

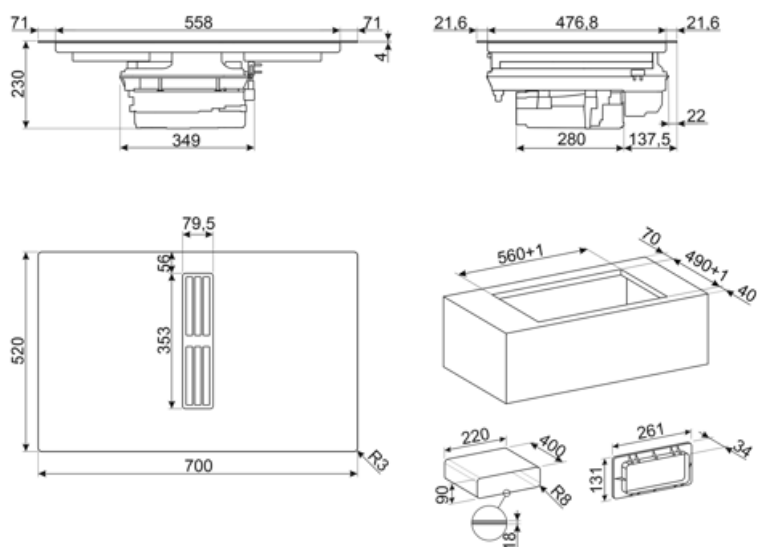

Compatible Accessories




CON60H

Flat duct connector for tubes 220*60 mm. It help to connect more tubes of the kit KITEHOBD4




CON90H

Connector for rectangular tubes high 90 mm. Size external 227*94*63 mm, internal 223*90*63 mm



FLTHOBD2

n.2 high-performance carbon filters regenerable up to 8 times, washing it in the dishwasher and drying it at max 70° in the oven for max 120 minutes



FLTSTDHOBD2

Anti Odour Filter regenerable as spare part, suitable for recirculation mode.




GRI60H

Rectangular Louvred grille, external size 246*80 mm and internal 226*60*50 mm



GRILLPLATE

Placa de rede universal para indução, gás, cerâmica e fogões elétricos. Superfície antiaderente ideal para cozinhar carne, queijo e vegetais. Dimensões: 410 x 240 mm.



GRIX6H

Stainless steel ventilation grille, size 426*60 mm.



KITDT50X10

tape for installation kit of HOBD*2. 10 m lenght. 50 mm width.



KITEHOBD10

Ducted kit for HOBD*2 with tubes and curve high 10 mm.




KITEHOBD4

Kit de filtragem (saída lateral) opcional para Hobd: tubo 1,5 mt e curva



KITREBFLOW

Rectangular grid used in ventilation system, 290 x 160 mm. Backdraft Damper for for regulating the air flow from the kitchen. Compatible for HOBD*2 models.



KITRHOB6

Mounting kit for recirculating installation: pipes and curves to be mounted in a plinth of minimum 6cm height. Available for HOBD*2 series.



KITSEBL

Squared grid used in ventilation system with backdraft Damper for regulating the air flow from the kitchen. Compatible for HOBD*2 models.



RED60H

Reducer from 90 to 60 mm suitable for rectangular tube of 220 mm. Size: 220x90x92 mm



TPK

Placa grelhadora de aço inoxidável para cozinhar pratos Teppanyaki

TPKPLATE

Placa universal para placas de indução, gás, cerâmica e fogões elétricos. Superfície antiaderente ideal para cozinhar peixe, ovos e vegetais. Dimensões: 410 X 240 mm.

Symbols glossary

	Detecção de pote automático permanente		Impulsionador de potência: opção permite que a zona funcione em potência máxima quando é necessário cozinhar muito intensamente.
	Bloqueio para crianças: alguns modelos estão equipados com um dispositivo para bloquear o programa/ciclo para que não possa ser acidentalmente alterado.		O painel de controle deslizante permite-lhe ajustar a potência simplesmente passando o dedo pelo dispositivo tátil.
	Mantenha a função quente: Mantenha a função quente mantém o alimento cozido aquecido. Neste modo, a zona de aquecimento funciona a uma capacidade mínima de 120 minutos e, em seguida, desliga-se automaticamente.		Multizona: permite que várias painelas sejam usadas ao mesmo tempo, grandes ou pequenas, oferecendo liberdade de colocação e maior flexibilidade
	Proteção especial contra transbordamento: A proteção especial contra transbordamento desliga o fogão na presença de transbordamento de líquidos.		PAUSE_72dpi
	Seleção rápida, com um toque de cozimento começa no nível mais alto, em seguida, reduz automaticamente após o tempo. Ideal para pratos que exigem fervura rápida e, em seguida, cozimento contínuo sem controle constante (por exemplo, caldo de carne).		Função de arranque rápido: a temperatura escolhida é atingida mais rapidamente. O elemento de aquecimento funciona na potência máxima até que a temperatura certa seja atingida.
	Indicação de calor residual: Depois de a placa de cerâmica de vidro ter sido desligada, o indicador de calor residual mostra qual das zonas de aquecimento ainda permanece quente. Quando a temperatura cai abaixo de 60°C, o indicador se apaga.		Evolution Slider efeito fantasma totalmente retroiluminado
	Tempo decorrido: mostra há quanto tempo a zona de cozedura está em uso.		Temporizador: Todas as placas de cerâmica têm um temporizador que termina automaticamente o cozimento após um tempo predefinido.
	TWIN_ZONE_72dpi		Detecção de pote de diâmetro mínimo de 9 cm
	Possibilidade de definir a absorção máxima de potência da placa		

Benefit (TT)

Induction hobs

Fast cooking and precise temperature control

Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

Ceramic

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Stainless steel

Strong and easy to maintain every day: doesn't break if dropped, resists rust, easy to clean with detergents, and doesn't absorb liquids or odors.

Evo Slider controls visible only when in use: an elegant touch that disappears after cooking, for a clean aesthetic

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Keep Warm function

Dishes always served at the right temperature, even after cooking, thanks to the Keep Warm function

Nine power levels and Boost function for optimal cooking performance

MultiZone

Large surface created by joining two contiguous zones, perfect for large dishes

In addition to their sleek aesthetics and contemporary design, Smeg induction hobs are equipped with innovative technologies. The Multizone function guarantees maximum flexibility in the use of the hob and endless cooking possibilities, expanding the cooking area to suit the shape and size of different pans

Anti-grease filters

Easy cleaning thanks to durable stainless steel grease filters

Permanent Automatic Pot Detection with indication of the relative control

Automatic activation of the correct cooking zone with Autopot Detection, recognizing the pot without user intervention

Automatic connection between integrated hood and hob

Automatic hood adjustment based on cooktop power for always-adequate extraction

Greater comfort even after cooking: the Delay function automatically turns off the hood after the set time, removing odors and humidity