

HTY500D

Family	Professional dishwasher
Subfamily	Hoodtype dishwashers
Line	Ecoline a pulsanti
Basket dimensions	500x500 mm
Wash pump	Standard



Accessories Included

Dish basket	1x PB50D01	Water supply hose	Yes - 2m
Cutlery basket	1x PHOOS02	Drain hose	Yes - 2m
Flat basket	1x PB50G02		

Target

Solutions	Coffee shops/Wine bars; Hotels; Restaurants/Pubs; QSR
-----------	---

Programs

Programs	2 automatic programs; Self-cleaning programs
Program specifications	Boiler 85°C/Tank 60°C - 2'30"; Boiler 85°C/Tank 60°C - 1'30"
Maximum basket/hour	40

Interface

Number of buttons	4	On/Off button	Yes
-------------------	---	---------------	-----

Construction

Tank	Deep drawn	Filter	4-stages filter system
		Tank capacity	14 l

Construction	Partial double wall	Boiler capacity	8 l
Tank material	Stainless steel AISI 304	Protection class	IPX4
Back panel	Prepainted	Adjustable feet	Yes
Upper washing system	One washing and one split rinse spray arms, stainless steel	Drain max. height	1000 mm
Tank filter	Stainless steel		
Hood elevation system	Manual		

Technical Features


Tank heating element power	2200 W	Max water hardness	12°f - 7°dH
Boiler heating element power	9000 W	Inlet pressure	2,5-6 bar / 250-600 kPa
Wash pump power	700 W	Detergent load	1,5 l/h
Default connection	9700 W	Rinse load	0,4 l/h
Water consumption per cycle	2,7 l	Usable load height	440 mm
Min. water connection temperature	8°C	Maximum height with open hood	2030 mm
Max. inlet temperature	60°C	Product dimensions WxDxH	620x736x1457 mm

Electrical Connection


Plug	Not present	Optional electrical connection	230 V~ / 29 A / 6,7 kW / 50 Hz; 400 V 3N~ / 13 A / 6,7 kW / 50 Hz
Power connection	400 V 3N~ / 16 A / 9,7 kW / 50 Hz		

Equipments

Drain pump	Yes	Stand-by system	Yes
Peristaltic detergent dispenser	Manual	Option for auto daily switch on	Yes, default OFF
Peristaltic rinse-aid dispenser	Manual	Partial renewal of water in the tank and built-in drain pump	Yes
Default chemicals dosing unit of measure	gr/lt	Water supply pipe diameter	DN15 - ½"
Rinse boiler Thermostop system	Yes - default	Drain supply pipe diameter	DN20-G 3/4"
Wash tank Thermostop system	Yes	Detergent (red) hose lenght	2,2m
Wash pump soft start system	Yes	Rinse aid (blue) hose lenght	2,2m

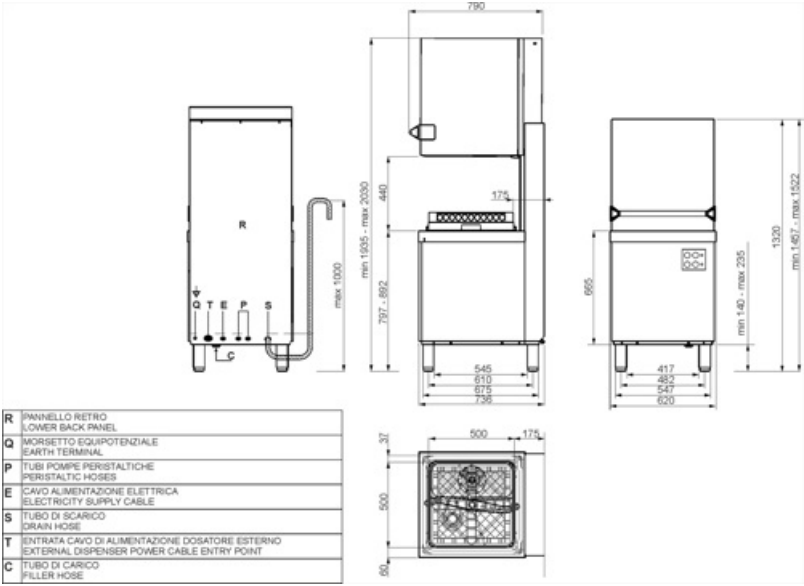


Compatible Accessories



PB50D01

Polypylene basket for 18 plates,
500x500x105 mm



PB50G02

Universal flat bottom polypropylene
basket, 500x500x170 mm



PHOGR5

Glass basket for 500x500 mm
glasswashers



PHOOS01

Polypropylene single basket for
cutlery




PHOOS02

6 compartments polypropylene basket
for cutlery



PHOOS03

8 compartments polypropylene
basket for cutlery suggested for
hoodtype



WB50D01

Wire basket for 18 dishes 250 mm max.
diameter or self service trays, 500X500
mm



WB50G01

Universal wire basket with flat
bottom, 500x500x123 mm



WB50G02

Wire basket for 90 mm diameter max
glasses with sloped bottom,
500x500x170 mm



WB50G03

Wire basket for 72 mm diameter
glasses with inclined bottom,
500x500x235 mm



WB50G04

Wire basket for glasses 135 mm
diameter max, with sloped bottom,
500x500x170 mm



WB50PG5

Wire basket for no. 25 plastic glasses
with flat bottom, 500x500x260 mm



WB50T02

Wire basket for 7 trays GN1/1 h 20 mm,
500x500 mm



WH00S01

Wire insert for 12 small dishes



WT51200SHL

Entry table left side with sink and
scraping hole, backsplash (100mm),
lower shelf, 1200x720x821,5



WT51200SHR

Entry table right side with sink and
scraping hole, backsplash (100mm),
lower shelf, 1200x720x821,5 mm



WT51200SL

Entry table left side with sink,
backsplash (100mm), lower shelf,
1200x720x821,5 mm



WT51200SR

Entry table right side with sink,
backsplash (100mm), lower shelf,
1200x720x821,5 mm



WT5700SL

Entry table left side with sink,
backsplash (100mm), lower shelf,
700x720x821,5 mm



WT5700SR

Entry table right side with sink,
backsplash (100mm), lower shelf,
700x720x821,5 mm

**WTX51200**

Exit table for both sides, with lower shelf, 1200x560x821,5 mm

**WTX51200R**

Exit table right side, with backsplash (100mm), with lower shelf, 1200x720x821,5 mm

**WTX5700L**

Exit table left side, with back splash (100mm) and lower shelf, 700x720x821,5 mm

**WTX51200L**

Exit table left side, with backsplash (100mm), with lower shelf, 1200x720x821,5 mm

**WTX5700**

Exit table for both sides, with lower shelf, 700x560x821,5 mm

**WTX5700R**

Exit table right side, with back splash (100mm) and lower shelf, 700x720x821,5 mm

Symbols glossary



SUITABLE FOR GASTRONORM TRAY



5 STAGE FILTER



MAX. USABLE HEIGHT 440mm

Benefit (TT)

4-stage filtration system

Deep cleaning and spotless washes with the Patented 4-Stages Filtration System

The innovative Smeg filtration system consists of 4 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd stages, finer particles are captured at this filtration stage; the 3th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Partial double skin

Optimised thermal and acoustic insulation

The double-skin design of the Ecoline features dual insulation on the door, top, and rear panel, while the side panels have a single layer of insulation. This structure optimises energy efficiency by minimising heat loss. Additionally, it provides effective acoustic insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.