

HTY505DS

Família	Máquina de lavar louça profissional
Subfamília	Máquina de lavar louça de capota
Dimensões do cesto	500x500 mm
Rinse pump	HTR system
Ligaçāo energética	400 V 3N~ / 16 A / 9,7 kW / 50 Hz



Mercado

Soluções	Bares/ Coffee shops/ Wine bars; Hotelaria; Restaurantes/ Pubs; Catering e cantinas; QSR
-----------------	---

Design

Design	Ecoline	Cor dos LEDs	Vermelho
--------	---------	--------------	----------

Especificações técnicas

Water consumption per cycle	2,7 l	Carga de detergente	1,5 l/h
Temperatura pré-definida de ligação da água	Fria 15°C	Carga de enxaguamento	0,4 l/h
Max. inlet temperature	60°C	Altura de carga operável	440 mm
Dureza máxima da água	54°f - 30°dH	Altura máxima com a capota aberta	2102 mm
Pressão de entrada	1-6 bar / 100-600 kPa	Dimensões de produto LxPxA:	620x736x1530 mm

Programas

Numero máximo de cestos/hora	40
Numero máximo de pratos/hora	720

Ligação elétrica

Tank heating element power	2200 W	Ligaçāo pré-definida	9700 W
Boiler heating element power	9000 W	Ligaçāo eléctrica opcional	230 V~ / 29 A / 6,7 kW / 50 Hz; 400 V 3N~ / 13 A / 6,7 kW / 50 Hz
Wash pump power	700 W		

Interface

Display	4 dígitos	Luz indicadora de falta de sal	Sim
Numero de botões	5	Diagnóstico manual	Sim
Luz indicadora On/Off	Sim		

ESPECIFICAÇĀOES TÉCNICAS

Tank	Pofundo	Filter	5-stage filter system
Tipologia	Parede dupla	Capacidade da cuba	14 l
Material da cuba	Aço Inox AISI 304	Capacidade da caldeira	8 l
Painel traseiro	Previamente pintado	Classe de Proteção	IPX4
Filtro da cuba	Aço inox	Altura max. de drenagem	1000 mm

Acessórios incluídos

Cesto para pratos	1x PB50D01	Mangueira de abastecimento de água	Sim - 2m
Cesto para talheres	1x PHOOS02	Mangueira de drenagem	Sim - 2m
Cesto de fundo plano	1x PB50G02		


Equipamentos

Peristaltic detergent dispenser	Controlo eletrónico	Contador de ciclos	Sim
Peristaltic rinse-aid dispenser	Controlo eletrónico	Break tank	Sim
Unidade de medida da dosagem de produtos químicos	gr/lt	Renovação parcial da água na cuba e bomba de drenagem integrada	Sim
Amaciador automático incorporado	Sim	Diâmetro do tudo de abastecimento de água	DN15 - ½"
Rinse boiler Thermostop system	Yes - default	Ø do tubo de drenagem	DN20-G 3/4"
Wash pump soft start system	Sim	Comprimento da mangueira de detergente (vermelha)	2,2m
Option for auto daily switch on	Sim, desligado por definição	Comprimento da mangueira de enxaguamento (azul)	2,2m

Dados de logística


Largura da embalagem (mm) 700 mm
Profundidade da embalagem (mm) 900 mm
Altura da embalagem (mm) 1700 mm

Dimensões do produto embalado (mm) 1700X700X900
Peso líquido (kg) 123.000 kg
Peso bruto (kg) 136.000

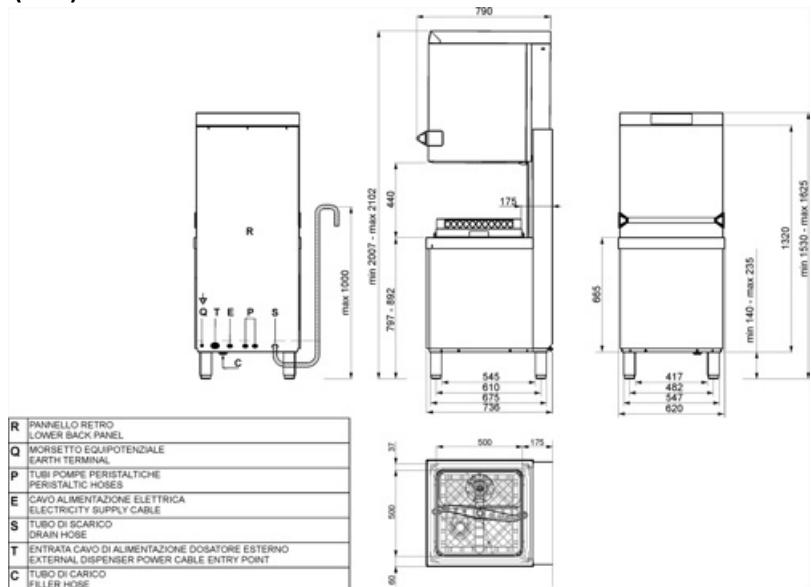

Acessórios Compatíveis

PB50D01



Polypropylene basket for 18 plates
Ø250 mm, dim.(WxDxH) 500x500x105 mm

PB50G01



Universal flat bottom polypropylene basket, dim. (WxDxH) 500x500x100 mm

PHOOS01



Polypropylene single basket for cutlery

PHOOS02



6 compartment polypropylene basket for cutlery

PHOOS03



8 compartments polypropylene basket for cutlery



WB50D01

Wire basket for 18 dishes Ø250 mm. or self service trays, dim. (WxDxH) 500X500x92 mm

WB50G01



Universal wire basket with flat bottom, dim. (WxDxH) 500x500x123 mm



WB50G02

Wire basket with sloped bottom for glasses Ø90 mm max, dim. (WxDxH) 500x500x170 mm

WB50G03




Wire basket with sloped bottom for glasses Ø72 mm max, dim. (WxDxH) 500x500x235 mm



WB50G04

Wire basket with sloped bottom for glasses Ø135 mm max, dim. (WxDxH) 500x500x165 mm

WB50T02



Wire basket for 7 trays GN1/1 h 20 mm



WH00S01

Wire insert for 12 small dishes



WT51200SHL

Mesa de entrada à esquerda com cuba, conduta de lixo, painel anti-salpicos (100mm) e prateleira inferior, 1200x720x821,5 mm



WT51200SHR

Mesa de entrada à direita com cuba, conduta de lixo, painel anti-salpicos (100mm) e prateleira inferior, 1200x720x821,5 mm



WT51200SL

Mesa de entrada à esquerda com cuba, painel anti-salpicos (100mm) e prateleira inferior, 1200x720x821,5 mm



WT51200SR

Mesa de entrada à direita com painel anti-salpicos (100mm) e prateleira inferior, 1200x720x821,5 mm



WT5700SL

Mesa de entrada à esquerda com cuba, painel anti-salpicos (100mm) e prateleira inferior, 700x720x821,5 mm



WT5700SR

Mesa de entrada à direita com cuba, painel anti-salpicos (100mm), prateleira inferior, 700x720x821,5 mm

WTX51200

Mesa de saída de ambos os lados com
prateleira inferior, 1200x560x821,5 mm

WTX51200L

Mesa de saída à esquerda com painel
anti-salpicos (100mm) e prateleira
inferior, 1200x720x821,5 mm

WTX51200R

Mesa de saída à direita com painel anti-
salpicos (100mm) e prateleira inferior,
1200x720x821,5 mm

WTX5700**WTX5700L**

Mesa de saída à esquerda com painel
anti-salpicos (100mm) e prateleira
inferior, 700x720x821,5 mm

**WTX5700R**

Mesa de saída à direita com painel
anti-salpicos (100mm) e prateleira
inferior, 700x720x821,5 mm

Symbols glossary



SUITABLE FOR GASTRONORM TRAY



HTR RINSING SYSTEM



5 STAGE FILTER



MAX. USABLE HEIGHT 440mm

Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.