

# HTY511DHAUS

<b>Family</b>	Dishwasher
<b>Type</b>	Hoodtype dishwasher
<b>Basket dimensions</b>	500x500 mm
<b>Control panel</b>	Electronic
<b>Rinse pump</b>	HTR system
<b>Wash pump</b>	Standard
<b>SHR system</b>	Yes
<b>Power connection</b>	400 V 3N~ / 16 A / 9,7 kW / 50 Hz
<b>Product dimensions WxDxH</b>	620x736x1530 mm



## Distribution

<b>Industries</b>	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Ristoranti / Catering; Catering; Butcher's shops; QSR
-------------------	--

## Aesthetics

<b>Led color</b>	Green	<b>Serie</b>	Easyline
------------------	-------	--------------	----------

## Technical Features

<b>Water consumption per cycle</b>	2,7 l	<b>Water inlet</b>	Cold 15°C
<b>Water inlet</b>	8°C	<b>Detergent load</b>	Yes, manual
<b>Max. inlet temperature</b>	60°C	<b>Rinse load</b>	Yes, manual
<b>Max water hardness</b>	12°f - 7°dH	<b>Usable load height</b>	440 mm

## Programs

<b>Programs</b>	6 automatic programs; 1 fully programmable program; Self-cleaning programs; Cold water rinse program
<b>Program options</b>	Extra rinse; Clean water cycle
<b>Maximum basket/hour</b>	60
<b>Maximum dishes/hour</b>	720

## Electrical Connection

<b>Tank heating element power</b>	2200 W	<b>Default connection</b>	9700 W
<b>Boiler heating element power</b>	9000 W	<b>Electrical connection option</b>	230 V~ / 29 A / 6,7 kW / 50 Hz; 400 V 3N~ / 13 A / 6,7 kW / 50 Hz
<b>Wash pump power</b>	700 W		

## Interface

<b>Display</b>	4 digit	<b>On/Off button</b>	Yes
<b>Number of buttons</b>	5	<b>Manual diagnostic</b>	Yes

## Construction

<b>Tank</b>	Deep drawn	<b>Filter</b>	5-stages filter system
<b>Construction</b>	Double wall	<b>Tank capacity</b>	14 l
<b>Tank material</b>	Stainless steel AISI 304	<b>Boiler capacity</b>	8 l
<b>Back panel</b>	Prepainted	<b>Boiler type</b>	Artmosferic boiler
<b>Upper washing system</b>	One washing and one split rinse spray arms, stainless steel	<b>Rumorosità</b>	Lpa 59,9 dBA
<b>Lower washing system</b>	One washing and one split rinse spray arms, stainless steel	<b>Protection class</b>	IPX4
<b>Tank filter</b>	Stainless steel	<b>Adjustable feet</b>	Yes
<b>Hood elevation system</b>	Manual	<b>Drain max. height</b>	1000 mm

## Accessories Included

<b>Dish basket</b>	PB50D01	<b>Water supply pipe</b>	In acciaio Watermark
<b>Cutlery basket</b>	PHOOS02	<b>Drain pipe</b>	Yes - 2m
<b>Flat basket</b>	1x PB50G02		


## Equipments

<b>Drain pump</b>	Yes	<b>Option for auto daily switch on</b>	Yes, default OFF
<b>Peristaltic detergent dispenser</b>	Yes, electronic control	<b>Cycle counter</b>	Yes
<b>Peristaltic rinse-aid dispenser</b>	Yes, electronic control	<b>Break tank</b>	Yes
<b>Default chemicals dosing unit of measure</b>	gr/lt	<b>Partial renewal of water in the tank and built-in drain pump</b>	Yes
<b>Rinse boiler Thermostop system</b>	Yes - default	<b>Water supply pipe diameter</b>	16 mm
<b>Wash tank Thermostop system</b>	Yes	<b>Drain supply pipe diameter</b>	21,5 mm

<b>Wash pump soft start system</b>	Yes	<b>Peristaltic detergent doser</b>	Yes, manual
<b>Stand-by system</b>	Yes	<b>Peristaltic detergent doser</b>	Yes, manual


## Logistic Information

<b>EAN code</b>	8017709264178	<b>Net weight</b>	135,000 kg
<b>Packed product dimensions (WxDxH)</b>	1700x770x900 mm	<b>Gross weight (kg)</b>	150,000 kg

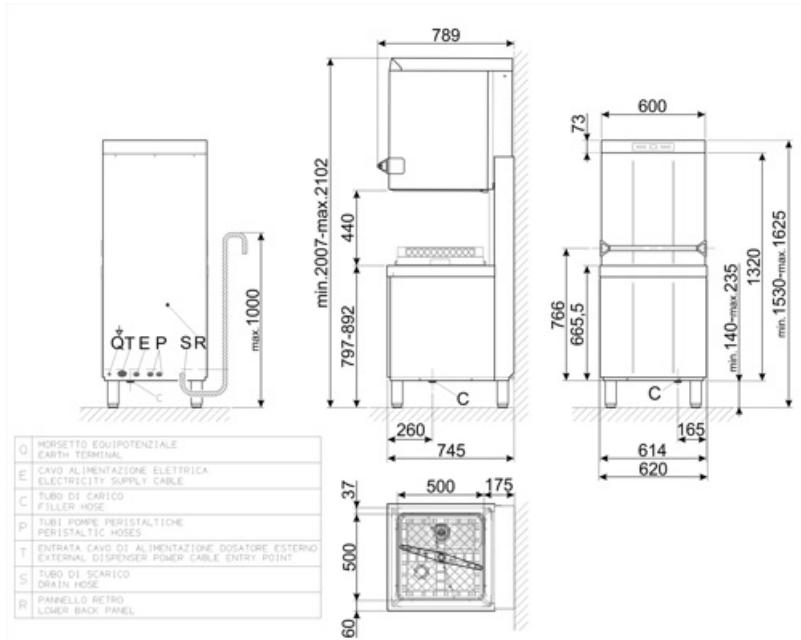


## Compatible Accessories

**PB50D01**



Basket made of polypylene for 18 plates  
500x500

**PB50G02**



Universal basket in polypropylene  
500x500

**PHOOS01**



Single basket in polypropylene for  
cutlery

**PHOOS02**



Basket in polypropylene for cutlery  
with 6 compartments

**PHOOS03**



Basket in polypropylene with 6  
compartment for cutlery for Capote

**WB50D01**



Wire basket for 18 dishes and trays  
500X500

**WB50G01**



Universal wire basket with flat bottom  
500x500



**WB50G02**

Wire basket for glasses with inclined  
bottom 500x500

**WB50G03**



Wire basket for glasses with inclined  
bottom 500x500




**WB50G04**

Wire basket for glasses with inclined  
bottom 500x500

**WB50PG5**



Wire basket with flat bottom for 25  
plastic glasses, max. H 230 mm, min.-  
max. Ø 36-95 mm, dim. (WxDxH)  
500x500x260 mm



**WB50T02**

Wire basket for 5 trays 600x500

**WH00S01**



Wire insert for 12 small dishes

---

## Benefit (TT)

---

### Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

### 5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### SHR+ System

Steam heat recovery system for energy savings and improved work environment quality

SHR+ System: guaranteed savings and comfort

The SHR+ System eliminates 100% of the steam produced during the rinse phase, improving air quality and reducing humidity in work environments. Additionally, it recovers energy from the condensed steam, ensuring up to 25% energy savings and eliminating the costs associated with an external extraction system.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Integral double skin

Thermal and acoustic insulation guaranteed

The double wall is designed to optimise energy efficiency by reducing heat loss and accelerating water heating, resulting in lower energy consumption and faster cycle start-up times. Additionally, it provides effective acoustic insulation, helping to reduce noise and ensuring a quieter, more comfortable working environment for the staff.

## Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

## Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

## Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.