

HTY611D1

Product Family	Dishwasher
Type	Hoodtype dishwasher
Basket dimensions	600x500 and 500x500 mm
Control Panel	Electronic
Rinse pump	Yes
Default power supply	400 V 3N~ / 16 A / 10 kW / 50 Hz



Aesthetics

Led colour	White
------------	-------

Technical Features

Trays washing option	Yes	Usable load height	420 mm
Warm water connection	Cold 15°C	Maximum height with hood open	2040 mm
Max. inlet temperature	60°C	Dimensions	730x760x1520 mm
Max water hardness	12°f - 7°dH		

Programmes

Maximum baskets/hour	60
Maximum plates/hour	1320

Electrical Connection

Tank heating element power	2200 W	Default connection	10000 W
Boiler heating element power	9000 W	Electrical connection options	230 V~ / 31 A / 7,0 kW / 50 Hz
Wash pump power	1000 W		

Interface

Display	8 digit	Cycle progress indicator	Yes
---------	---------	--------------------------	-----

On/off indicator	Yes
Low rinse aid alert	Yes
Low detergent alert	Yes

End of cycle indicator	Yes
Manual diagnostics	Yes

Construction

Tank	Deep drawn	Filter	5-stages filter system
Construction	Double wall	Wash tank capacity	25 l
Tank material	Stainless steel AISI 304	Boiler capacity	8 l
Back panel	Galvanised	Drain max. height	1000 mm
Tank filter	Stainless steel		

Accessories Included


Plate basket	PB60D01	Water supply pipe	Yes - 2m
Cutlery basket	PHOOS03	Drain pipe	Yes - 2m
Flat basket	PB60G01		

Equipment

Peristaltic detergent dispenser	Yes, electronic control	Option for auto daily switch on	Yes
Peristaltic rinse-aid dispenser	Yes, electronic control	Break tank	Yes
Chemical level probe	Yes, optional KITSONLIV	Water supply pipe diameter	16 mm
Chemical dosing	gr/lt	Drain supply pipe diameter	21.5 mm
Rinse boiler Thermostop system	Yes - default		

Logistic Information

Packed width	770 mm	Dimensions of the packed product (mm)	1700x770x900
Packaged depth	900 mm	Net weight (kg)	130,000 kg
Height (mm) packed	1700 mm	Gross weight (kg)	148,000 kg

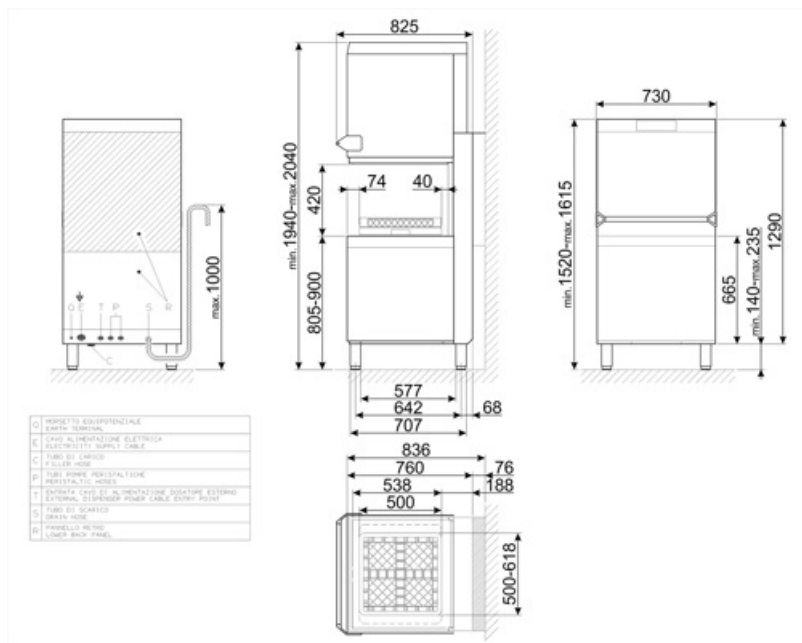


Compatible Accessories



KITSONLIV

Probe level kit



PB50G02

Universal basket in polypropylene
500x500



PHOOS02

Basket in polypropylene for cutlery with
6 compartments




WB50G01

Universal wire basket with flat bottom
500x500



WB60D02

Wire basket for 24 dishes 600X500



WB60T03

Wire basket for 5 trays 600x500



WT51200SHL

Entry table left side 1200mm



WT51200SL

Entry table left side 1200mm



WT5700SL

Entry table left side 700mm



PB50D01

Basket made of polypylene for 18
plates 500x500




PB60T02

Basket for trays GN1/1 600x500



WB50D01

Wire basket for 18 dishes and trays
500X500



WB60D01

Wire basket for 24 dishes 600X500



WB60G01

Wire basket with flat bottom
600x500



WH00S01

Wire insert for 12 small dishes



WT51200SHR

Entry table right side 1200mm



WT51200SR

Entry table right side 1200mm



WT5700SR

Entry table right side 700mm

**WTX51200**

Exit table both sides 1200mm

**WTX51200L**

Exit table lefts side 1200mm

**WTX51200R**

Exit table right side 1200mm

**WTX5700**

Exit table both sides 700mm

**WTX5700L**

Exit table left side 700mm

**WTX5700R**

Exit table right side 700mm

**WTX6700F**Tavolo di entrata/uscita 700mm con
aggancio frontale

Benefit

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integral double skin

Thermal and acoustic insulation guaranteed

The double wall is designed to optimise energy efficiency by reducing heat loss and accelerating water heating, resulting in lower energy consumption and faster cycle start-up times. Additionally, it provides effective acoustic insulation, helping to reduce noise and ensuring a quieter, more comfortable working environment for the staff.