

HTY615D

Product Family	Dishwasher
Subfamily	Hoodtype dishwasher
Basket dimensions	600x500 and 500x500 mm
Rinse pump	HTR system



Accessories Included

Plate basket	PB60D01	Water supply pipe	Yes - 2m
Cutlery basket	PHOOS03	Drain pipe	Yes - 2m
Flat basket	PB60G01		

Target

Potential users	Restaurants/Catering; Bakery/Pastry making; Industrial pastry&bakery laboratories; Butcher's shops; Meat processing industry; Schools
-----------------	--

Programmes

Programs	6 automatic programs; 1 fully programmable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 71°C/Tank 60°C-1'20"; Boiler 71°C/Tank 60°C- 2'10"; Boiler 85°C/Tank 60°C-60"; Boiler 85°C/Tank 60°C- 1'10"; Boiler 85°C/Tank 60°C-2'40"; Boiler 85°C/Tank 60°C-4'10"; Boiler 85°C/Tank 60°C-1'30"
Maximum baskets/hour	60
Maximum plates/hour	1122

Interface

Display	8 digit	Cycle progress indicator	Yes
On/off indicator	Yes	End of cycle indicator	Yes
Low rinse aid alert	Yes	Manual diagnostics	Yes
Low detergent alert	Yes		

Construction

Tank	Deep drawn	Hood	Double skinned
Construction	Double wall	Filter	5-stages filter system
Tank material	Stainless steel AISI 304	Wash tank capacity	22 l
Back panel	Stainless steel	Boiler capacity	8 l
Upper washing system	One washing and one split rinse spray arms, stainless steel	Protection class	IPX4
Lower washing system	One washing and one split rinse spray arms, stainless steel	Adjustable feet	Yes
Tank filter	Stainless steel	Drain max. height	1000 mm

Technical Features

Trays washing option	Yes	Max water hardness	12°f - 7°dH
Tank heating element power	2200 W	Water inlet pressure	1-6 bar / 100-600 kPa
Boiler heating element power	9000 W	Detergent flow rate	1.5 l/h
Washing pump power	730 W	Rinse aid flow rate	0.4 l/h
Default connection	9730 W	Usable load height	420 mm
Water consumption per cycle	3,2 l	Maximum height with hood open	2102 mm
Warm water connection	8°C	Dimensions	716x760x1520 mm
Inlet water maximum temperature	60°C		

Electrical Connection

Default power supply	400 V 3N~ / 16 A / 9,7 kW / 50 Hz	Electrical connection options	230 V~ / 31 A / 7,0 kW / 50 Hz
-----------------------------	-----------------------------------	--------------------------------------	--------------------------------

Equipment

Drain pump	Yes	Automatic start	Yes
Peristaltic detergent pump	Yes, electronic control	Cycle counter	Yes
Peristaltic rinse aid pump	Yes, electronic control	Break tank	Yes
Chemical level probe	Yes, optional KITSONLIV	Partial water exchange in the wash tank via built-in drain pump	Yes
Chemical dosing	gr/lt	Water supply pipe diameter	16 mm
Boiler thermostat	Yes - default		
Soft Start	Yes		

Stand-by system

Yes

Drain supply pipe diameter


21.5 mm

Detergent (red) hose length

Yes, manual

Rinse aid (blue) hose length

Yes, manual

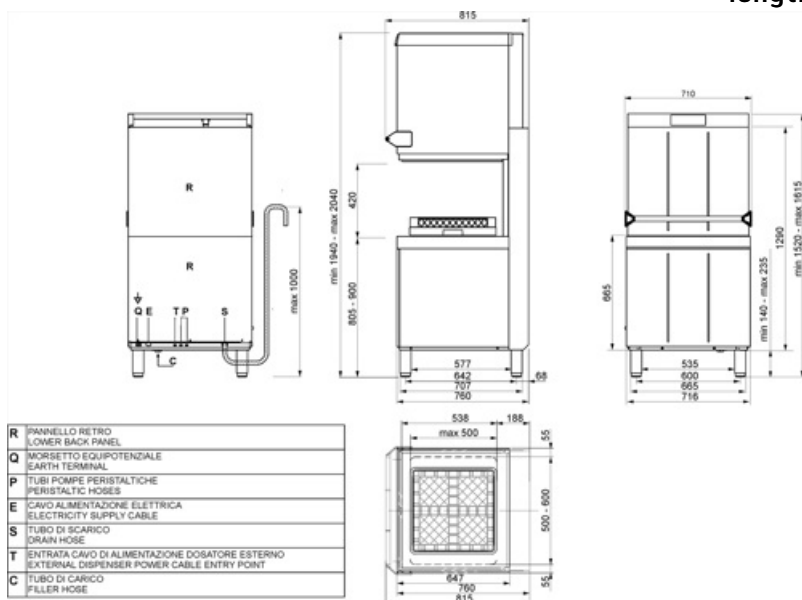

Not included accessories



PB60T02

Basket for trays GN1/1 600x500



PHOOS03

Basket in polypropylene with 6 compartments for cutlery for Capote



KITSONLIV

Probe level kit



PB60G01

Universal basket in polypropylene 600x500




WH00S01

Wire insert for 12 small dishes



WB60G01

Wire basket with flat bottom 600x500



WB60T03

Wire basket for 5 trays 600x500




PHOOS01

Single basket in polypropylene for cutlery




WB60D02

Wire basket for 24 dishes 600x500




PB50G02

Universal basket in polypropylene 500x500



WB50G01

Universal wire basket with flat bottom 500x500



PB50D01

Basket made of polypropylene for 18 plates 500x500



WB50G02

Wire basket for glasses with inclined bottom 500x500



WB60D01

Wire basket for 24 dishes 600x500



PB50G01

Universal basket in polypropylene 500x500



WB50G04

Wire basket for glasses with inclined bottom 500x500



PB60D01

Basket in polypropylene for 22 dishes 600x500



PHOOS02

Basket in polypropylene for cutlery with 6 compartments



WB50D01

Wire basket for 18 dishes and trays 500x500