

HTY625D

Product Family	Dishwasher
Subfamily	Hoodtype dishwasher
Basket dimensions	600x500 and 500x500 mm
Rinse pump	HTR system
Washing pump	Standard



Accessories Included

Plate basket	PB60D01	Water supply pipe	Yes - 2m
Cutlery basket	PHOOS03	Drain pipe	Yes - 2m
Flat basket	PB60G01		

Target

Potential users	Restaurants/Catering; Industrial pastry&bakery laboratories; Butcher's shops; Meat processing industry; Hospitals; Schools
------------------------	--

Programmes

Programs	13 automatic programs; 1 fully programmable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 24°C/Tank 60°C-4'; Boiler 71°C/Tank 60°C-50"; Boiler 71°C/Tank 60°C-1'10"; Boiler 71°C/Tank 60°C- 2'10"; Boiler 85°C / Vasca 70°C - 45'20"; Boiler 85°C / Vasca 70°C - 50'20"; Boiler 85°C / Vasca 70°C - 7'10"; Boiler 85°C/Tank 60°C-1'10"; Boiler 85°C/Tank 60°C-2'; Boiler 85°C/Tank 60°C-2'30"
Maximum baskets/hour	72
Maximum plates/hour	1584

Interface

Display	TFT	Cycle progress indicator	Yes
On/off indicator	Yes	End of cycle indicator	Yes
Low rinse aid alert	Yes	Manual diagnostics	Yes
Low detergent alert	Yes		

Construction

Tank	Deep drawn	Hood elevation system	Manual
Construction	Double wall	Filter	5-stages filter system
Tank material	Stainless steel AISI 304	Wash tank capacity	22 l
Back panel	Galvanised	Boiler capacity	8 l
Upper washing system	One washing and one split rinse spray arms, stainless steel	Protection class	IPX4
Lower washing system	One washing and one split rinse spray arms, stainless steel	Adjustable feet	Yes
Tank filter	Stainless steel	Drain max. height	1000 mm
Hood	Double skinned		

Technical Features

Trays washing option	Yes	Max water hardness	12°f - 7°dH
Tank heating element power	2200 W	Water inlet pressure	1-6 bar / 100-600 kPa
Boiler heating element power	9000 W	Detergent flow rate	1.5 l/h
Washing pump power	730 W	Rinse aid flow rate	0.4 l/h
Default connection	9730 W	Usable load height	420 mm
Water consumption per cycle	3,2 l	Maximum height with hood open	2040 mm
Warm water connection	8°C	Dimensions	716x760x1520 mm
Inlet water maximum temperature	60°C		


Electrical Connection

Default power supply	400 V 3N~ / 16 A / 9,7 kW / 50 Hz	Electrical connection options	230 V~ / 31 A / 7,0 kW / 50 Hz
-----------------------------	-----------------------------------	--------------------------------------	--------------------------------

Equipment

Drain pump	Yes	Automatic start	Yes
Peristaltic detergent pump	Yes, electronic control	Cycle counter	Yes
		Break tank	Yes

Peristaltic rinse aid pump	Yes, electronic control	Partial water exchange in the wash tank via built-in drain pump	Yes
Chemical level probe	Yes, optional KITSONLIV	Water supply pipe diameter	16 mm
Boiler thermostop	Yes - default	Drain supply pipe diameter	21.5 mm
Tank thermostop	Yes	Detergent (red) hose length	Yes, manual
Soft Start	Yes	Rinse aid (blue) hose length	Yes, manual
Stand-by system	Yes		

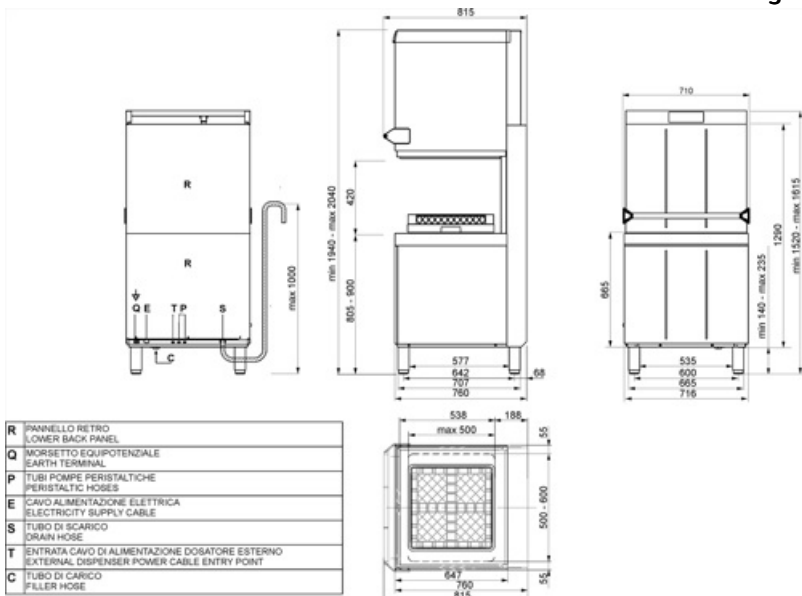

Not included accessories



KITSONLIV
Probe level kit



PB50G01
Universal basket in polypropylene
500x500



PB60D01
Basket in polypropylene for 22 dishes
600x500



PB60T02
Basket for trays GN1/1 600x500



PHOOS02
Basket in polypropylene for cutlery with
6 compartments




WB50D01
Wire basket for 18 dishes and trays
500x500




WB50G02
Wire basket for glasses with inclined
bottom 500x500




WB60D01
Wire basket for 24 dishes 600x500



WB60G01
Wire basket with flat bottom 600x500



PB50D01
Basket made of polypylene for 18
plates 500x500



PB50G02
Universal basket in polypropylene
500x500



PB60G01
Universal basket in polypropylene
600x500



PHOOS01
Single basket in polypropylene for
cutlery



PHOOS03
Basket in polypropylene with 6
compartment for cutlery for Capote




WB50G01
Universal wire basket with flat bottom
500x500



WB50G04
Wire basket for glasses with inclined
bottom 500x500



WB60D02
Wire basket for 24 dishes 600x500



WB60T03
Wire basket for 5 trays 600x500



WH00S01

Wire insert for 12 small dishes



WT51200SHL8

Entry table left side 1200mm