

# HTY625DEH

Familie	Afwasmachine
Subfamilie	Doorschuiver
Korf afmetingen	600x500 en 500x500 mm
Rinse pomp	HTR systeem
SHR systeem	Ja



## Meegeleverde accessoires

Vaat korf	PB60D01	Toevoerslang	Ja - 2,2m
Bestek mand	PHOOS03	Afvoerpijp	Ja - 2,2m
Vlakke korf	PB60G01		

## Target

Solutions	Restaurants/Pubs; Frozen bakery industry; Food retail; Other food industry; Health and care; Catering and Institutions
-----------	--

## Programs

Programs	13 automatic programs; 1 fully customizable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle
Program specifications	19- 24°C / 60°C - 4'; 1- 71 °C / 60 °C - 50"; 12- 71°C / 60°C - 1' 10"; 13- 71°C / 60°C - 2' 10"; Boiler 85°C / Tank 70°C - 45'20"; Boiler 85°C / Tank 70°C - 50'20"; Boiler 85°C / Tank 70°C - 7'10"; 18- 85°C / 60°C - 1' 10"; 7- 85°C / 60°C - 2'; 8- 85°C / 60°C - 2' 30"
Max korven/uur	72
Maximale vaat/uur	1584

## Interface

Display	TFT	Programma verloop melding	Ja
Aan/uit knop	Ja	Einde-cyclus melding	Ja
Naglans spoelmiddel leeg melding	Ja	Handmatige diagnose	Ja
Melding, geen zeep	Ja		

## Construction

Tank Construction	Deep drawn Double wall	Filter	5-stages filter system
Tank materiaal	Roestvrij staal AISA 304	Tank volume	22 l
Achterwand	Voorzien van laklaag	Boiler volume	8 l
Upper washing system	One washing and one split rinse spray arms, stainless steel	Protection class	IPX4
Tank filter	Roestvrij staal	Adjustable feet	Ja
Kap	Dubbelwandig	Maximale hoogte water afvoer	1000 mm

## Technische specificaties

Trays washing option	Ja	Maximale water hardheid	12°f - 7°dH
Tank heating element power	2200 W	Water invoer	Koud 15°C
Boiler heating element power	9000 W	Peristaltische naspoelpomp	Ja, handmatig
Washing pump power	730 W	Peristaltische naspoelpomp	Ja, handmatig
Standaard aansluiting	9730 W	Bruikbare ruimte in hoogte	420 mm
Electrische aansluiting	3,2 l	Maximale hoogte met open kap	2040 mm
Water invoer	Koud 15°C	Product dimensions WxDxH	716x835x1520 mm
Maximale temperatuur water invoer	60°C		

## Elektrische aansluiting

Electrische aansluiting	400 V 3N~ / 16 A / 9,7 kW / 50 Hz	Electronische aansluiting	230 V~ / 31 A / 7,0 kW / 50 Hz
-------------------------	-----------------------------------	---------------------------	--------------------------------


## Equipments

Afvoerpomp	Ja	Automatische start	Ja, standaard uitgeschakeld
DHR systeem	Ja	Cycle counter	Ja
Peristaltische zeppomp	Ja, elektronisch geregeld	Breaktank	Ja
Peristaltische naspoelpomp	Ja, elektronisch geregeld	Partial renewal of water in the tank and built-in drain pump	Ja
Chemie niveau probe	Ja, optioneel KITSONLIV	Diameter toevoerslang	Ja - 1,5m
Chemie dosering	gr/lt	Diameter afvoerslang	Ja - 2,2m
Boiler thermostop	Yes - default	Peristaltische zeppomp	handmatig
Soft Start system	Ja		

Stand-by system

Ja

Peristaltische zeppomp handmatig

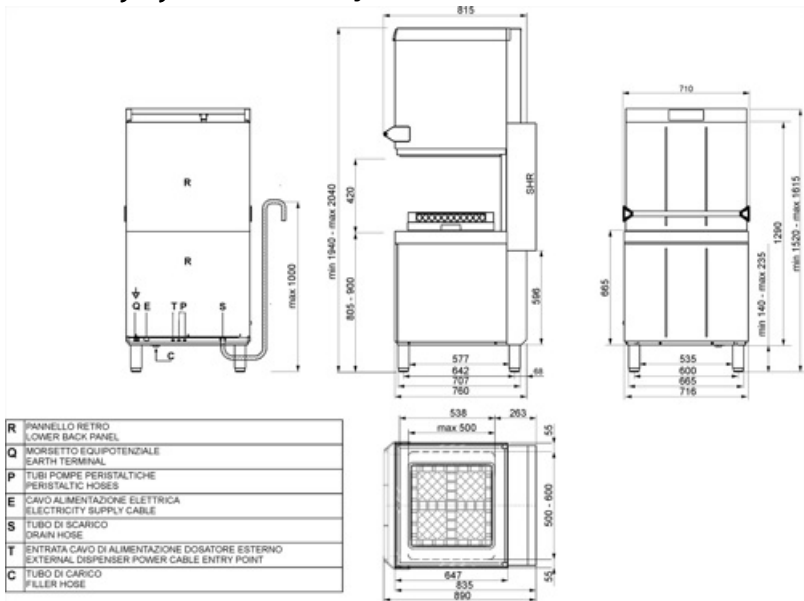

## Accessoires niet inbegrepen



### WT51200SL8

Entry table left side with sink, backsplash (100mm), lower shelf, 1200x800x821,5 mm



### WT51200SHR8

Entry table right side with sink and scraping hole, backsplash (100mm), lower shelf, 1200x800x821,5 mm



### PB60T02

Basket for GN1/1 trays, 600x500x100 mm

### KITSONLIV

Probe level kit for double wall models




### WT5700SL8

Entry table left side with sink, backsplash (100mm), lower shelf, 700x800x821,5 mm



### WH00S01

Wire insert for 12 small dishes




### WB60T03

Wire basket for 5 trays dim.600x400 mm, 600x500 mm



### PHOOS01

Polypropylene single basket for cutlery



### PB50G02

Universal flat bottom polypropylene basket, 500x500x170 mm



### WTX6700L8

Exit table left side with back splash (100mm) and lower shelf, 700x750x821,5 mm



### WTX51200L8

Exit table left side, with backsplash (100mm), with lower shelf, 1200x800x821,5 mm



### PHOOS03

8 compartments polypropylene basket for cutlery suggested for hoodtype



### PB60G01

Universal flat bottom polypropylene basket, 600x500x115 mm



### WTX61200L8

Exit table left side, with backsplash (100mm), with lower shelf, 1200x750x821,5 mm



### WB60G01

Wire basket with flat bottom, 600x500x123 mm



### WT51200SHL8

Entry table left side with sink and scraping hole, backsplash (100mm), lower shelf, 1200x800x821,5 mm



### WB60D02

Wire basket for 24 dishes max diameter 320 mm, 600x500 mm



### WT51200SR8

Entry table right side with sink, backsplash (100mm), lower shelf, 1200x800x821,5 mm



**WB50G01**

Universal wire basket with flat bottom,  
500x500x123 mm




**WTX61200R8**

Exit table right side, with backsplash  
(100mm), with lower shelf,  
1200x750x821,5 mm




**WB50G02**

Wire basket for 90 mm diameter max  
glasses with sloped bottom,  
500x500x170 mm



**WB60D01**

Wire basket for 24 dishes max diameter  
260mm, 600X500



**WB50G04**

Wire basket for glasses 135 mm  
diameter max, with sloped bottom,  
500x500x170 mm



**WT5700SR8**

Entry table right side with sink,  
backsplash (100mm), lower shelf,  
700x800x821,5 mm




**PHOOS02**

6 compartments polypropylene basket  
for cutlery



**WTX5700R8**

Exit table right side, with back splash  
(100mm) and lower shelf,  
700x800x821,5 mm




**PB50D01**

Polypylene basket for 18 plates,  
500x500x105 mm



**WTX51200R8**

Exit table right side, with backsplash  
(100mm), with lower shelf,  
1200x800x821,5 mm



**PB50G01**

Universal polypropylene basket,  
500x500x100 mm



**WTX5700L8**

Exit table left side, with back splash  
(100mm) and lower shelf,  
700x800x821,5 mm



**PB60D01**

Polypropylene basket for 22 dishes,  
600x500x115 mm



**WB50D01**

Wire basket for 18 dishes 250 mm  
max. diameter or self service trays,  
500X500 mm