

HTY625DH

Family	Professional dishwasher
Subfamily	Hoodtype dishwasher
Basket dimensions	600x500 e 500x500 mm
Panel	Topline
Filter	5-stages filter system
Rinse pump H.T.R. system	Yes
SHR system	Yes
Usable load height	420 mm
Power connection	400 V 3N~ / 16 A / 9,7 kW / 50 Hz
Maximum height with open hood	2040 mm
Product dimensions WxDxH	716x835x1520 mm



Target

Solutions	Restaurants/Pubs; Frozen bakery industry; Food retail; Other food industry; Health and care; Catering and Institutions
-----------	--

Aesthetics

Series	Topline	Led color	White
Control panel	touch screen		

Functions



Functionality	A0 = 30; A0 = 60; Euronorm trays washing; GN 1/1 trays washing; 5-stage filter; SHR+; HTR; Door clearance 420mm
---------------	---

Programs

Programs	13 automatic programs; 1 fully programmable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle

Program specifications

Boiler 85°C / Vasca 70°C - 45'20"; Boiler 85°C / Vasca 70°C - 50'20"; Boiler 85°C / Vasca 70°C - 7'10"; Boiler 71°C/Tank 60°C - 50"; Boiler 85°C/Tank 60°C - 1'10"; Boiler 85°C/Tank 60°C - 2'; Boiler 85°C/Tank 60°C - 2'30"; Boiler 71°C/Tank 60°C - 1'10"; Boiler 71°C/Tank 60°C - 2'10"; Boiler 24°C/Tank 60°C - 4'

Drain and self cleaning cycle

Yes

Maximum basket/hour

72

Maximum dishes/hour

1584

Interface

Display TFT

On/Off button Yes

Rinse aid missing alert Yes

Detergent missing alert Yes

Cycle progress alert Yes

End-cycle alert Yes

Manual diagnostic Yes

Construction

Tank Deep drawn
Construction Double wall
Tank material Stainless steel AISI 304
Back panel Prepainted
Tank filter Stainless steel
Washing spray arm 2 in stainless steel
Rinse spray arm 2 in stainless steel

Hood construction Double wall
Tank capacity 25 l
Boiler capacity 8 l
Protection class IPX4
Adjustable feet Yes
Net weight 145.000 kg
Drain max. height 1000 mm

Technical Features

Tank heating element 2200 W
Boiler heating element 9000 W
Washing pump 730 W
Default connection 9730 W
Water cycle consumption 3,2 l

Warm water connection 15°C
Max temperature inlet water 60°C
Max water hardness 12°f - 7°dH
Inlet pressure 100-600 kPa

Electrical Connection

Optional electrical connection 230 V~ / 31 A / 7,0 kW / 50 Hz

Equipments


Drain pump Yes
Peristaltic detergent doser Electronic control
Peristaltic rinse-aid doser Electronic control

Rinse load 0,4 l/h
Cycle counter Yes
Break tank Yes

Chemicals level probe	Yes, with optional kit KITSONLIV	Partial renewal of water in the tank and built-in drain pump	Yes
Default chemicals dosing unit of measure	gr/lt		
Thermostop system	Yes	Trays/basket washing option 600x400	Yes
Soft Start system	Yes	Trays washing option GN1/1 530x325mm	Yes
Stand-by system	Yes	Water supply pipe diameter	DN15 - ½"
Automatic start	Yes, default OFF	Drain supply pipe diameter	DN20-G 3/4"
Detergent load	1,5 l/h	Detergent (red) hose lenght	2,2m
		Rinse aid (blue) hose lenght	2,2m

Accessories Included

Dish basket	1x PB60D01	Water supply hose	Yes - 2m
Cutlery basket	1x PHOOS03	Drain hose	Yes - 2m
Flat basket	1x PB60G01		

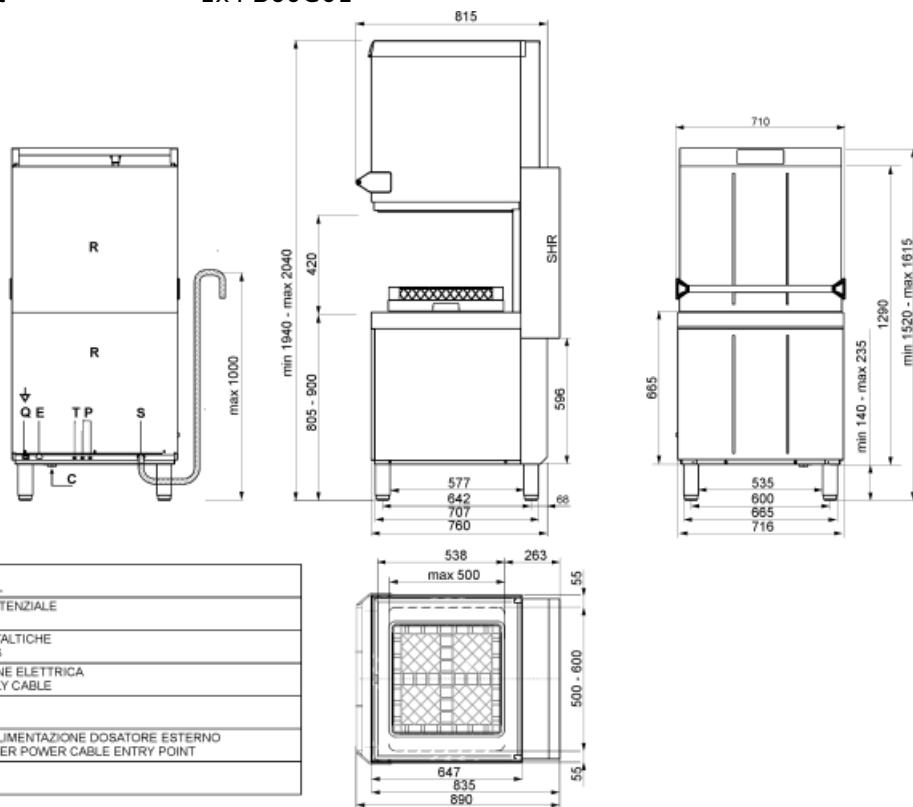

Not included accessories



WT51200SL8

Entry table left side with sink, backsplash (100mm), lower shelf, 1200x800x821,5 mm



WT51200SHR8

Entry table right side with sink and scraping hole, backsplash (100mm), lower shelf, 1200x800x821,5 mm



WTX6700L8

Exit table left side with back splash (100mm) and lower shelf, 700x750x821,5 mm



WTX51200L8

Exit table left side, with backsplash (100mm), with lower shelf, 1200x800x821,5 mm



PB60T02

Basket for GN1/1 trays, 600x500x100 mm



PHOOS03

8 compartments polypropylene basket for cutlery suggested for Hood Type



KITSONLIV

Probe level kit for double wall models



PB60G01

Universal flat bottom polypropylene basket, 600x500x115 mm



WT5700SL8

Entry table left side with sink, backsplash (100mm), lower shelf, 700x800x821,5 mm



WTX61200L8

Exit table left side, with backsplash (100mm), with lower shelf, 1200x750x821,5 mm




WH00S01

Wire insert for 12 small dishes



WB60G01

Wire basket with flat bottom, 600x500x123 mm



WB60T03

Wire basket for 5 trays dim.600x400 mm, 600x500 mm




PHOOS01

Polypropylene single basket for cutlery



WB60D02

Wire basket for 24 dishes max diameter 320 mm, 600x500 mm



PB50G02

Universal flat bottom polypropylene basket, 500x500x170 mm




WT51200SR8

Entry table right side with sink, backsplash (100mm), lower shelf, 1200x800x821,5 mm



WTX5700R8

Exit table right side, with back splash (100mm) and lower shelf, 700x800x821,5 mm



PB50D01

Polypylene basket for 18 plates, 500x500x105 mm



WTX51200R8

Exit table right side, with backsplash (100mm), with lower shelf, 1200x800x821,5 mm



PB50G01

Universal polypropylene basket, 500x500x100 mm



WTX5700L8

Exit table left side, with back splash (100mm) and lower shelf, 700x800x821,5 mm



PB60D01

Polypropylene basket for 22 dishes, 600x500x115 mm



WB50G01

Universal wire basket with flat bottom, 500x500x123 mm




WTX61200R8

Exit table right side, with backsplash (100mm), with lower shelf, 1200x750x821,5 mm



WB50G02

Wire basket for 90 mm diameter max glasses with sloped bottom, 500x500x170 mm



WB60D01

Wire basket for 24 dishes max diameter 260mm, 600x500



WB50G04

Wire basket for glasses 135 mm diameter max, with sloped bottom, 500x500x170 mm



WT5700SR8

Entry table right side with sink, backsplash (100mm), lower shelf, 700x800x821,5 mm



PHOOS02

6 compartments polypropylene basket for cutlery



WB50D01

Wire basket for 18 dishes 250 mm max. diameter or self service trays, 500x500 mm

Symbols glossary (TT)



THERMODESINFECTION A0=30



THERMODESINFECTION A0=60



SUITABLE FOR EURONORM TRAY



SUITABLE FOR GASTRONORM
TRAY



HTR RINSING SYSTEM



STEAM HEAT RECOVERY SYSTEM



MAX. USABLE HEIGHT 420mm



5 STAGE FILTER