

HTY625DS

Product Family	Dishwasher
Subfamily	Hoodtype dishwasher
Basket dimensions	600x500 and 500x500 mm
Rinse pump	HTR system
Washing pump	Standard



Accessories Included

Plate basket	PB60D01	Water supply pipe	Yes - 2m
Cutlery basket	PHOOS03	Drain pipe	Yes - 2m
Flat basket	PB60G01		

Target

Potential users	Restaurants/Catering; Industrial pastry&bakery laboratories; Butcher's shops; Meat processing industry; Hospitals; Schools
------------------------	--

Programmes

Programs	13 automatic programs; 1 fully programmable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 24°C/Tank 60°C-4'; Boiler 71°C/Tank 60°C-50"; Boiler 71°C/Tank 60°C-1'10"; Boiler 71°C/Tank 60°C- 2'10"; Boiler 85°C / Vasca 70°C - 45'20"; Boiler 85°C / Vasca 70°C - 50'20"; Boiler 85°C / Vasca 70°C - 7'10"; Boiler 85°C/Tank 60°C-1'10"; Boiler 85°C/Tank 60°C-2'; Boiler 85°C/Tank 60°C-2'30"
Maximum baskets/hour	72
Maximum plates/hour	1584

Interface

Display	TFT	Low detergent alert	Yes
On/off indicator	Yes	Cycle progress indicator	Yes
Salt light indicator	Yes	End of cycle indicator	Yes
Low rinse aid alert	Yes	Manual diagnostics	Yes

Construction

Tank	Deep drawn	Hood elevation system	Manual
Construction	Double wall	Filter	5-stages filter system
Tank material	Stainless steel AISI 304	Wash tank capacity	22 l
Back panel	Galvanised	Boiler capacity	8 l
Upper washing system	One washing and one split rinse spray arms, stainless steel	Protection class	IPX4
Lower washing system	One washing and one split rinse spray arms, stainless steel	Adjustable feet	Yes
Tank filter	Stainless steel	Drain max. height	1000 mm
Hood	Double skinned		

Technical Features

Trays washing option	Yes	Max water hardness	54°f - 30°dH
Tank heating element power	2200 W	Water inlet pressure	1-6 bar / 100-600 kPa
Boiler heating element power	9000 W	Detergent flow rate	1.5 l/h
Washing pump power	730 W	Rinse aid flow rate	0.4 l/h
Default connection	9730 W	Usable load height	420 mm
Water consumption per cycle	3,2 l	Maximum height with hood open	2040 mm
Warm water connection	8°C	Dimensions	716x760x1520 mm
Inlet water maximum temperature	60°C		


Electrical Connection

Default power supply	400 V 3N~ / 16 A / 9,7 kW / 50 Hz	Electrical connection options	230 V~ / 31 A / 7,0 kW / 50 Hz
-----------------------------	-----------------------------------	--------------------------------------	--------------------------------












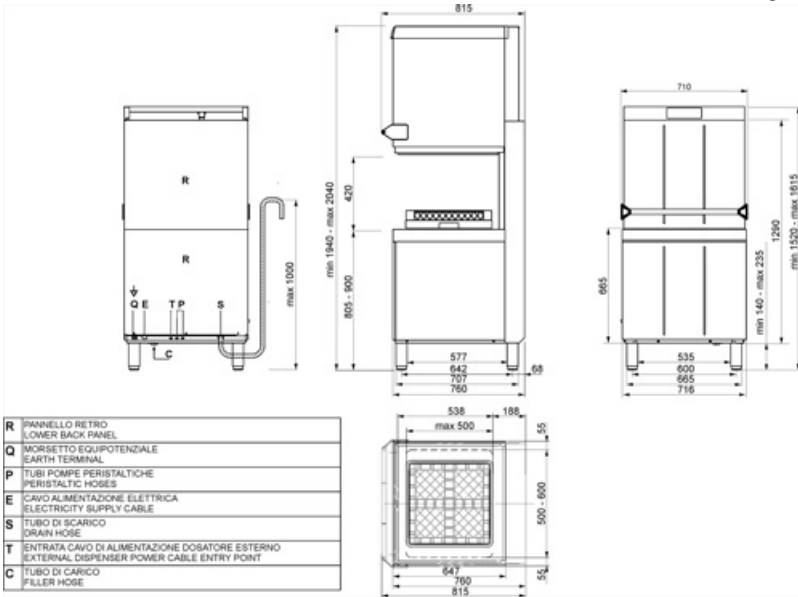






Equipment

Drain pump	Yes	Automatic start	Yes
Peristaltic detergent pump	Yes, electronic control	Cycle counter	Yes
		Break tank	Yes

Peristaltic rinse aid pump	Yes, electronic control	Partial water exchange in the wash tank via built-in drain pump	Yes
Chemical level probe	Yes, optional KITSONLIV	Water supply pipe diameter	16 mm
Integral continuous water softener	Yes	Drain supply pipe diameter	21.5 mm
Boiler thermostop	Yes - default	Detergent (red) hose length	Yes, manual
Tank thermostop	Yes	Rinse aid (blue) hose length	Yes, manual
Soft Start	Yes		
Stand-by system	Yes		



Not included accessories

	<p>KITSONLIV Probe level kit</p>		<p>PB50D01 Basket made of polypylene for 18 plates 500x500</p>
	<p>PB50G01 Universal basket in polypropylene 500x500</p>		<p>PB50G02 Universal basket in polypropylene 500x500</p>
	<p>PB60D01 Basket in polypropylene for 22 dishes 600x500</p>		<p>PB60G01 Universal basket in polypropylene 600x500</p>
	<p>PB60T02 Basket for trays GN1/1 600x500</p>		<p>PHOOS01 Single basket in polypropylene for cutlery</p>
	<p>PHOOS02 Basket in polypropylene for cutlery with 6 compartments</p>		<p>PHOOS03 Basket in polypropylene with 6 compartment for cutlery for Capote</p>
	<p>WB50D01 Wire basket for 18 dishes and trays 500x500</p>		<p>WB50G01 Universal wire basket with flat bottom 500x500</p>
	<p>WB50G02 Wire basket for glasses with inclined bottom 500x500</p>		<p>WB50G04 Wire basket for glasses with inclined bottom 500x500</p>
	<p>WB60D01 Wire basket for 24 dishes 600x500</p>		<p>WB60D02 Wire basket for 24 dishes 600x500</p>
	<p>WB60G01 Wire basket with flat bottom 600x500</p>		<p>WB60T03 Wire basket for 5 trays 600x500</p>

WH00S01



Wire insert for 12 small dishes