

HTY625DS

Familie	Afwasmachine
Subfamilie	Doorschuiver
Korf afmetingen	600x500 en 500x500 mm
Rinse pump	HTR system
Washing pump	Standard



Meegeleverde accessoires

Vaat korf	PB60D01	Toevoerslang	Ja - 2,2m
Bestek mand	PHOOS03	Afvoerpijp	Ja - 2,2m
Vlakke korf	PB60G01		

Target

Solutions	Restaurants/Pubs; Frozen bakery industry; Food retail; Other food industry; Health and care; Catering and Institutions
-----------	--

Programs

Programs	13 automatic programs; 1 fully customizable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle
Program specifications	19- 24°C / 60°C - 4'; 1- 71 °C / 60 °C - 50"; 12- 71°C / 60°C - 1' 10"; 13- 71°C / 60°C - 2' 10"; Boiler 85°C / Tank 70°C - 45'20"; Boiler 85°C / Tank 70°C - 50'20"; Boiler 85°C / Tank 70°C - 7'10"; 18- 85°C / 60°C - 1' 10"; 7- 85°C / 60°C - 2'; 8- 85°C / 60°C - 2' 30"
Max korven/uur	72
Maximale vaat/uur	1584

Interface

Display	TFT	Melding, geen zeep	Ja
Aan/uit knop	Ja	Programma verloop melding	Ja
Zout melding	Ja	Einde-cyclus melding	Ja
Naglans spoelmiddel leeg melding	Ja	Handmatige diagnose	Ja

Construction

Tank	Deep drawn	Hood elevation system	Manual
Construction	Double wall	Filter	5-stages filter system
Tank materiaal	Roestvrij staal AISA 304	Tank volume	22 l
Achterwand	Voorzien van laklaag	Boiler volume	8 l
Upper washing system	One washing and one split rinse spray arms, stainless steel	Protection class	IPX4
Lower washing system	One washing and one split rinse spray arms, stainless steel	Adjustable feet	Ja
Tank filter	Roestvrij staal	Maximale hoogte water afvoer	1000 mm
Kap	Dubbelwandig		

Technische specificaties

Trays washing option	Ja	Maximale water hardheid	54°f - 30°dH
Tank heating element power	2200 W	Water invoer	Koud 15°C
Boiler heating element power	9000 W	Peristaltische naspoelpomp	Ja, handmatig
Washing pump power	730 W	Peristaltische naspoelpomp	Ja, handmatig
Standaard aansluiting	9730 W	Bruikbare ruimte in hoogte	420 mm
Electrische aansluiting	3,2 l	Maximale hoogte met open kap	2040 mm
Water invoer	5°C	Product dimensions WxDxH	716x760x1520 mm
Maximale temperatuur water invoer	60°C		

Elektrische aansluiting

Electrische aansluiting	400 V 3N~ / 16 A / 9,7 kW / 50 Hz	Electronische aansluiting	230 V~ / 31 A / 7,0 kW / 50 Hz
-------------------------	-----------------------------------	---------------------------	--------------------------------


Equipments

Afvoerpomp	Ja	Automatische start	Ja, standaard uitgeschakeld
Peristaltische zeppomp	Ja, elektronisch geregeld	Cycle counter	Ja
Peristaltische naspoelpomp	Ja, elektronisch geregeld	Breaktank	Ja
Chemie niveau probe	Ja, optioneel KITSONLIV		

Ingebouwde waterontharder	Ja
Boiler thermostop	Yes - default
Tank thermostop	Yes
Soft Start system	Ja
Stand-by system	Ja

Partial renewal of water in the tank and built-in drain pump Ja

Diameter toevoerslang	Ja - 1,5m
Diameter afvoerslang	Ja - 2,2m
Peristaltische zeppomp	handmatig
Peristaltische zeppomp	handmatig

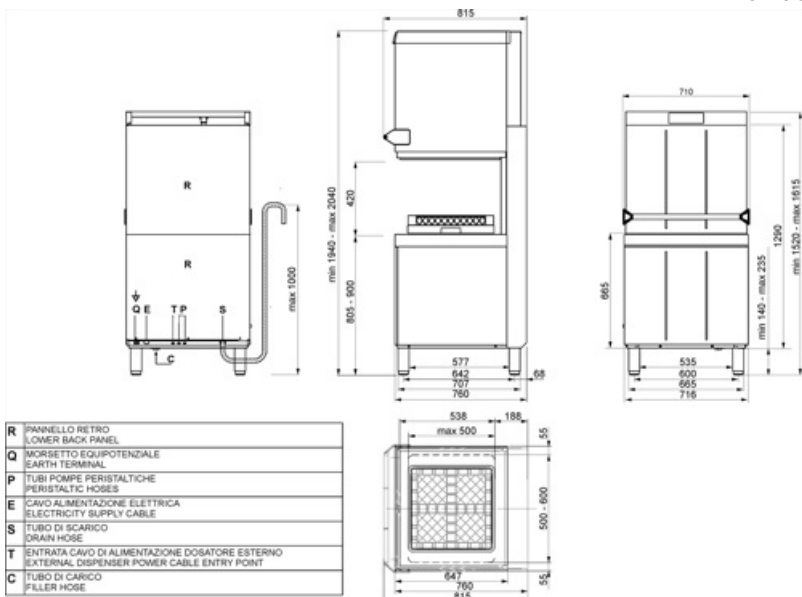

Accessoires niet inbegrepen



KITSONLIV

Probe level kit for double wall models



PB50G01

Universal polypropylene basket,
500x500x100 mm



PB60D01

Polypropylene basket for 22 dishes,
600x500x115 mm



PB60T02

Basket for GN1/1 trays, 600x500x100
mm



PHOOS02

6 compartments polypropylene basket
for cutlery



WB50D01

Wire basket for 18 dishes 250 mm max.
diameter or self service trays, 500X500
mm



WB50G02

Wire basket for 90 mm diameter max
glasses with sloped bottom,
500x500x170 mm




WB60D01

Wire basket for 24 dishes max diameter
260mm, 600X500




WB60G01

Wire basket with flat bottom,
600x500x123 mm



PB50D01

Polypylene basket for 18 plates,
500x500x105 mm



PB50G02

Universal flat bottom polypropylene
basket, 500x500x170 mm



PB60G01

Universal flat bottom polypropylene
basket, 600x500x115 mm




PHOOS01

Polypropylene single basket for
cutlery



PHOOS03

8 compartments polypropylene
basket for cutlery suggested for
hoodtype



WB50G01

Universal wire basket with flat
bottom, 500x500x123 mm




WB50G04

Wire basket for glasses 135 mm
diameter max, with sloped bottom,
500x500x170 mm



WB60D02

Wire basket for 24 dishes max
diameter 320 mm, 600X500 mm



WB60T03

Wire basket for 5 trays dim.600x400
mm, 600x500 mm

WH00S01



Wire insert for 12 small dishes