

K43X

| | |
|--------------------|-----------------------------|
| Product family | Professional hood |
| Subfamily | Condensation |
| Hood Type | Mounted on oven |
| Design | Angled |
| Tecnology | Suction and filtering hood |
| Extraction | Recirculation |
| Electronic control | Yes |
| Suitable for | Convection ovens 435x320 mm |
| Material | Stainless steel |
| Type of steel | Polished |
| Hood width | 60 cm |






Aesthetics

| | | | |
|----------------------|-----------------|------|----------|
| Colour | Stainless steel | Logo | Embossed |
| Components finishing | Stainless steel | | |

Controls

| | | | |
|-----------------|-------------------------------------|-----------|-------|
| Control setting | Touch control back-lighted White | Led color | White |
|-----------------|-------------------------------------|-----------|-------|

Programme / Functions

| | |
|-------------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| 24h air filter function |  |
| Time-setting options |  |

Technical Features



| | | | |
|---------------|-------|------------------------------|--------|
| No. of lights | 1 | No. of filters | 1 |
| Light type | LED | Anti-grease filters | Buffle |
| Light Power | 1,1 W | Charcoal filters included | Yes |
| Dimmer mode | Yes | Filter replacement indicator | Yes |

Light color temperature scale (°K) 4000 °K

Free outlet maximum capacity 670 m³/h

Motor power 230 W

Vent outlet 150 mm

Non return valve Yes


Electrical Connection

Electrical connection rating 232 W

Voltage 220-240 V

Frequency (Hz) 50-60 Hz

Power supply cable length 1500 mm

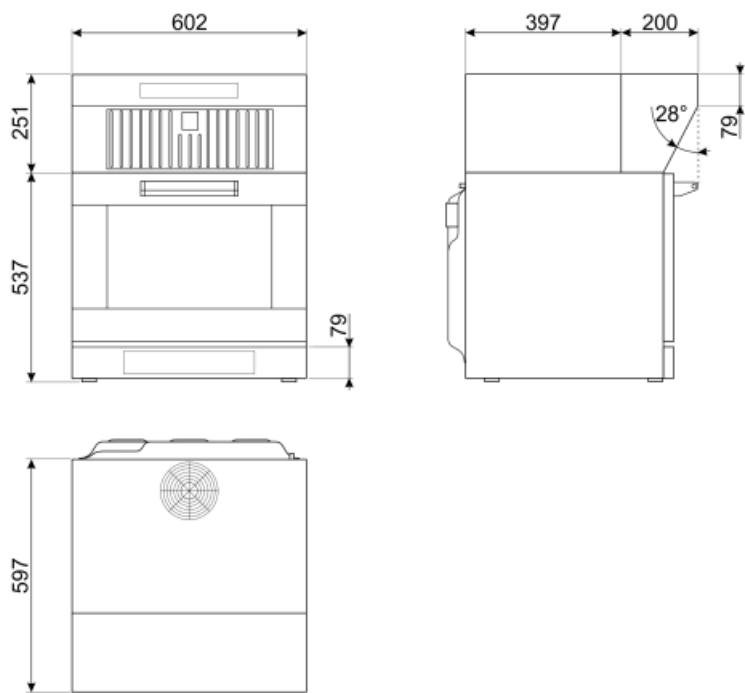

Not included accessories



FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC









Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITCMNKVX

Chimney Extension in Stainless Steel for hood KV*series 300 mm*200 mm + 500/850 mm

Symbols glossary (TT)

| | | | |
|--|---|--|---|
|  A square icon containing a circle with the number "24" inside. | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  A square icon showing three horizontal lines with upward-pointing arrows above them and downward-pointing arrows below them. | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  A square icon containing a circle with a clock face. | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |  A square icon showing three horizontal lines with upward-pointing arrows above them. | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably. |
|  A square icon containing a light bulb. | Warning light(s): to advise when filters need changing. |  A square icon containing a light bulb. | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  A square icon containing a circular arrow with the word "BOOST" below it. | Intensive/turbo setting: when extra fast extraction is required. |  A square icon containing a light bulb with a vertical line through it. | Dimmering Lights |