

# K4610X

|                    |   |
|--------------------|---|
| Product family     | Professional hood   |
| Subfamily          | Condensation  |
| Hood Type          | Mounted on oven   |
| Design             | Angled  |
| Tecnology          | Suction and filtering hood  |
| Extraction         | Recirculation   |
| Electronic control | Yes   |
| Suitable for       | Combined oven 5 trays GN1/1 ;<br>Convection ovens 600x400 mm -<br>GN1/1 |
| Material           | Stainless steel   |
| Type of steel      | Polished  |
| Hood width         | 80 cm   |



## Aesthetics

|                      |                 |      |          |
|----------------------|-----------------|------|----------|
| Colour               | Stainless steel | Logo | Embossed |
| Components finishing | Stainless steel |      |          |

## Controls

|                 |                                     |           |       |
|-----------------|-------------------------------------|-----------|-------|
| Control setting | Touch control back-lighted<br>White | Led color | White |
|-----------------|-------------------------------------|-----------|-------|


## Technical Features



|                              |          |                                   |        |
|------------------------------|----------|-----------------------------------|--------|
| No. of lights                | 1        | Charcoal filters included         | Yes    |
| Light type                   | LED      | No. of filters                    | 2      |
| Light Power                  | 1,1 W    | Filter replacement indicator      | Yes    |
| Dimmer mode                  | Yes      | Vent outlet                       | 150 mm |
| Free outlet maximum capacity | 900 m³/h | Non return valve                  | Yes    |
| Anti-grease filters          | Buffle   | Light color temperature scale (K) | 4000 K |
| Motor power                  | 330 W    |                                   |        |

## Electrical Connection

|                |           |                           |         |
|----------------|-----------|---------------------------|---------|
| Voltage        | 220-240 V | Power supply cable length | 1500 mm |
| Frequency (Hz) | 50-60 Hz  |                           |         |

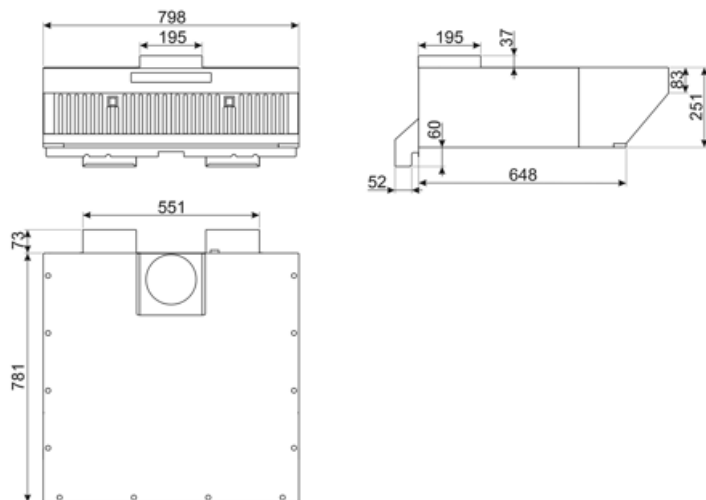

## Logistic Information

|  |                |                     |           |
|--|----------------|---------------------|-----------|
| <b>EAN code</b>                          | 8017709314446  | <b>Net weight</b>   | 19.810 kg |
| <b>Packed product dimensions (WxDxH)</b> | 798x854x251 mm | <b>Gross weight</b> | 24.230 kg |

## Compatible Accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITCMNKVX

Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm











### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---

|  |   |   |   |
|--|---|---|---|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.                       |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.                        |  | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably. |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                 |
|  | Intensive/turbo setting: when extra fast extraction is required.  |  | Dimmering Lights  |