

K4610X

Product family	Hoods
Subfamily	Condensation
Hood Type	Mounted on oven
Design	Angled
Tecnology	Suction and filtering hood
Extraction	Recirculation
Electronic control	Yes
Suitable for	Combined oven 5 trays GN1/1 ; Convection ovens 600x400 mm - GN1/1
Material	Stainless steel
Type of steel	Polished
Hood width	80 cm




Aesthetics

Colour	Stainless steel	Logo	Embossed
Components finishing	Stainless steel		

Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------


Technical Features



No. of lights	1	Charcoal filters included	Yes
Light type	LED	No. of filters	2
Light Power	1,1 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Free outlet maximum capacity	900 m ³ /h	Non return valve	Yes
Anti-grease filters	Buffle	Light color temperature scale (K)	4000 K
Motor power	330 W		

Electrical Connection

Voltage	220-240 V	Power supply cable length	1500 mm
Frequency (Hz)	50-60 Hz		

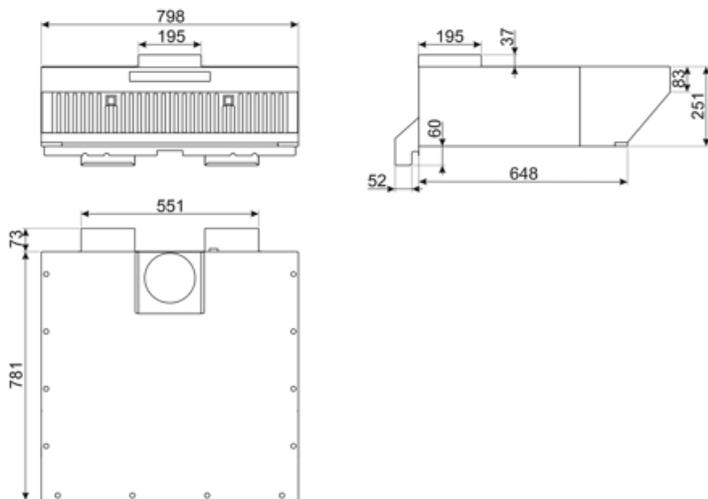

Logistic Information

EAN code	8017709314446	Net weight	19,810 kg
Packed product dimensions (WxDxH)	798x854x251 mm	Gross weight	24,230 kg

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITCMNKVX

Chimney Extension in Stainless Steel for hood KV*series Dimensions 300x200x850 mm



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary

- | | | | |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |  | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably. |
|  | Dimmering Lights |  | Warning light(s): to advise when filters need changing. |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |  | Intensive/turbo setting: when extra fast extraction is required. |