

# K4610X

Product family	Professional hood
Subfamily	Condensation
Hood Type	Mounted on oven
Design	Angled
Tecnology	Suction and filtering hood
Extraction	Recirculation
Electronic control	Yes
Suitable for	Combined oven 5 trays GN1/1 ; Convection ovens 600x400 mm - GN1/1
Material	Stainless steel
Type of steel	Polished
EAN code	8017709314446
Hood width	80 cm






## Aesthetics

Colour	Stainless steel	Logo	Embossed
Components finishing	Stainless steel		

## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Programme / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	


## Technical Features

						
No. of lights	1	No. of filters	2			
Light type	LED	Anti-grease filters	Buffle			
Light Power	1,1 W	Charcoal filters included	Yes			
Dimmer mode	Yes	Filter replacement indicator	Yes			

Light color temperature scale (°K)	4000 °K	Vent outlet	150 mm
Free outlet maximum capacity	900 m³/h	Non return valve	Yes
Motor power	330 W		

## Electrical Connection

Voltage	220-240 V	Power supply cable length	1500 mm
Frequency (Hz)	50-60 Hz		

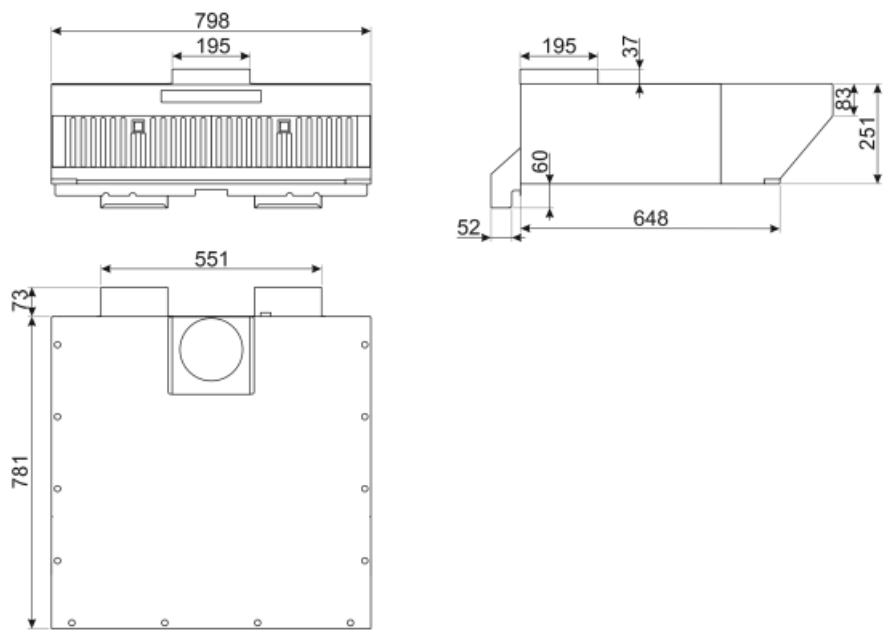

---

## Not included accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes











### KITCMNKVX

Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm

---

## Symbols glossary (TT)

---

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Intensive/turbo setting: when extra fast extraction is required.		Dimmering Lights