

K510X

Product family	Professional hood
Subfamily	Condensation
Hood Type	Mounted on oven
Design	Angled
Tecnology	Suction and filtering hood
Extraction	Recirculation
Electronic control	Yes
Suitable for	Combi steamer oven 4 trays 600x400mm; Combined oven 10 trays GN1/1; Combined oven 5 trays GN1/1
Material	Stainless steel
Type of steel	Brushed
Hood width	80 cm




Aesthetics

Colour	Stainless steel	Logo	Embossed
Components finishing	Stainless steel		


Controls

Control setting	Soft touch	Led color	White
-----------------	------------	-----------	-------

Programme / Functions

No. of speeds	1
Intensive speed	
Other functions	Automatic activation of intensive speed when the oven door is opened.

Technical Features


	Free outlet maximum capacity	900 m³/h	Anti-grease filters	Flame retardant labyrinth filter st/steel AISI 304
	Motor power	320 W	Vent outlet	150 mm
	No. of filters	2	Non return valve	Yes

Electrical Connection

Voltage	220-240 V	Power supply cable length	2500 mm
Frequency (Hz)	50-60 Hz		

Optional accessories

Charcoal filter FLT6

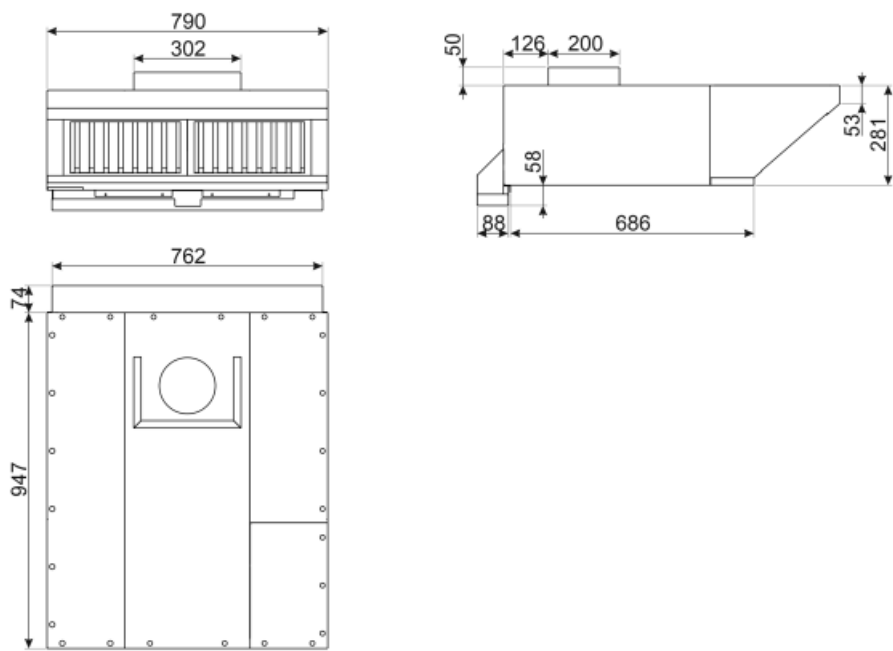

Not included accessories



FLT6

Round Charcoal filters (kit 2 pieces)

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Intensive/turbo setting: when extra fast extraction is required.