

KAT1200HXE

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201555
Hood width	120 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Silk screen



Controls

Control setting	Buttons
-----------------	---------

Program / Functions

No. of speeds	3
Intensive speed	

Technical Features



No. of lights	3	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light Power	8 W	Vent outlet	150 mm
Light color temperature scale (°K)	3500 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	750 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	260 W	Non return valve	Yes
No. of filters	4		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	240	46
Speed 2	336	55

Speed 3	448	62
Intensive speed	603	69

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 58 kWh/a
Energy efficiency class (EEC) B
Fluid Dynamic Efficiency (FDE) 28
Fluid Dynamic Efficiency class (FDEC) B
Lighting Efficiency (LE) 29 lux/W
Lighting Efficiency Class (LEC) A
Grease Filtering Efficiency (GFE) 66 %
Grease Filtering Efficiency Class (GFEC) D
Air flow at minumum speed (Qmin) 240 m³/h
Air flow at maximum speed (Qmax) 448 m³/h
Air flow at boost speed (Qboost) 603 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 46 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 62 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 69 dBA
Power consumption in stand-by mode (Ps) 0,49 W
Time increase factor (F) 1,00
Measured air flow rate at best efficiency point (Qbep) 336 m³/h
Measured air pressure at best efficiency point (Pbep) 434 Pa
Measured electric power input at best efficiency point (Wbep) 145 W
Nominal Power consumption of the light system (WL) 8 W
Average illumination of the light on the cooking surface (Emiddle) 218 lux
Sound power level at highest setting (Lwa) 62 dBA


Electrical Connection

Plug Not present
Electrical connection rating 268 W
Voltage 220-240 V

Frequency (Hz) 50 Hz
Power supply cable length 1500 mm

Optional accessories

Charcoal filter KITFC900 - KITFC999 **Chimney extension** KITCMNKAT

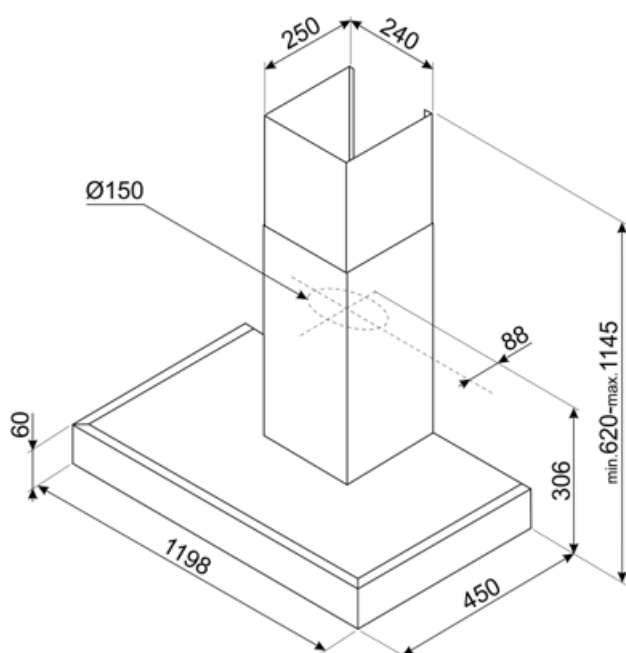

Compatible Accessories



KITCMNKAT

Chimney extension dimension 241 * 231
* 810 T-shape hood KAT & KATE
Stainless Steel



KITFC900

Charcoal filter Kit 1 piece high
performances washable



KITFC999

Charcoal filter Kit 1 piece

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.