

KATE600CEX

Product family

Hood Type	Hood
Design	Decorative wall hood
Extraction	T flat
Material	Extraction
Type of steel	Stainless steel
EAN code	Brushed
Hood width	8017709255053
Aesthetic	60 cm
Colour	Universale
Finishing	Stainless steel
Logo	Satin
	Silk screen




Controls

Control setting	Buttons
-----------------	---------

Program / Functions

No. of speeds	3
---------------	---

Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Charcoal filters included	Yes
Light Power	2,5 W	Vent outlet	150 mm
Light color temperature scale (K)	3500 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	612 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	175 W	Non return valve	Yes
No. of filters	2		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	241	46
Speed 2	370	56

Speed 3	590	65
---------	-----	----

Accessories included

Tube reduction Yes

Performance / Energy Label


 Annual Efficiency Consumption (AEChood)	77 kWh/a	Airbourne acoustical A- weighted sound Power	47 dBA
Energy efficiency class (EEC)	C	Emission at minimum speed (SPEmin)	
Fluid Dynamic Efficiency (FDE)	20,2	Airborne acoustical A- weighted sound Power	68 dBA
Fluid Dynamic Efficiency class (FDEC)	C	Emission at maximum speed (SPEmax)	
Lighting Efficiency (LE)	76,1 lux/W	Time increase factor (F)	1,3
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	336 m³/h
Grease Filtering Efficiency (GFE)	76 %	Measured air pressure at best efficiency point (Pbep)	334 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	155 W
Air flow at minimum speed (Qmin)	240 m³/h	Nominal Power consumption of the light system (WL)	5 W
Air flow at maximum speed (Qmax)	581 m³/h	Average illumination of the light on the cooking surface (Emiddle)	381 lux
		Sound power level at highest setting (Lwa)	68 dBA

Electrical Connection

Electrical connection rating	180 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

Optional accessories

Chimney extension KITCMNKAT

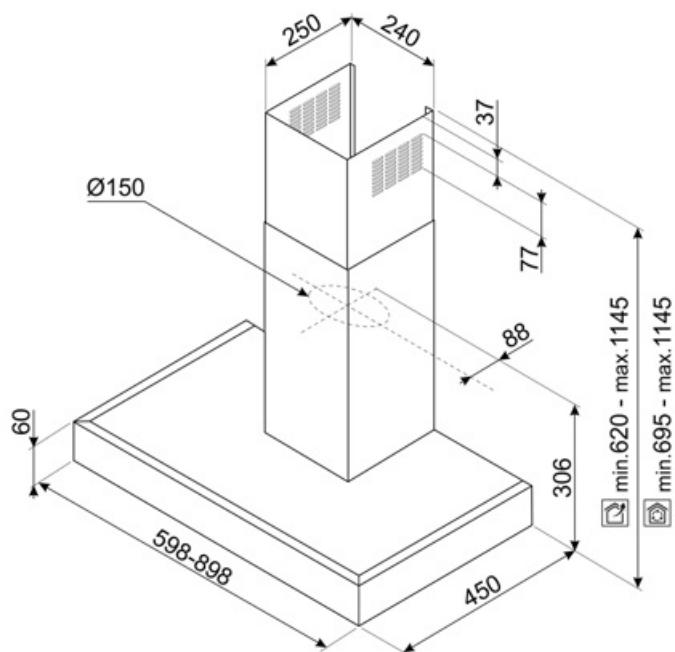

Compatible Accessories



KITCMNKAT

Chimney extension dimension 241 * 231
* 810 T-shape hood KAT & KATE
Stainless Steel



KITFC900

Charcoal filter. Kit 1 piece. High performances. Regenerable. To be washed after 3 months of use with hot water. To be changed after 3 years of use.



KITFC999

Charcoal filter Kit 1 piece

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.

