

# KATE600EX

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709235130
Hood width	60 cm



## Aesthetics

Aesthetic Colour Finishing	Universale Stainless steel Satin	Serigraphy colour Logo	Black Silk screen
----------------------------	----------------------------------	------------------------	-------------------



## Controls

Control setting	Buttons
-----------------	---------

## Programme / Functions

No. of speeds	3
---------------	---

## Technical Features

			
No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Aluminium
Light Power	2.5 W	Vent outlet	150 mm
Light color temperature scale (°K)	3500 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	612 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	175 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	241	46
Speed 2	370	56
Speed 3	590	67

## Accessories Included

Tube reduction Yes

## Performance / Energy Label

C

**Annual Efficiency Consumption (AEChood)** 77 kWh/a  
**Energy efficiency class (EEC)** C  
**Fluid Dynamic Efficiency (FDE)** 20,2  
**Fluid Dynamic Efficiency class (FDEC)** C  
**Lighting Efficiency (LE)** 76,1 lux/W  
**Lighting Efficiency Class (LEC)** A  
**Grease Filtering Efficiency (GFE)** 76 %  
**Grease Filtering Efficiency Class (GFEC)** C  
**Air flow at minumum speed (Qmin)** 240 m³/h  
**Air flow at maximum speed (Qmax)** 581 m³/h

**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 47 dB(A)  
**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 68 dB(A)  
**Time increase factor (F)** 1,3  
**Measured air flow rate at best efficiency point (Qbep)** 336 m³/h  
**Measured air pressure at best efficiency point (Pbep)** 334 Pa  
**Measured electric power input at best efficiency point (Wbep)** 155 W  
**Nominal Power consumption of the light system (WL)** 5 W  
**Average illumination of the light on the cooking surface (Emiddle)** 381 lux  
**Sound power level at highest setting (Lwa)** 68 dB(A)

## Electrical Connection

**Electrical connection rating** 180 W  
**Voltage** 220-240 V

**Frequency (Hz)** 50-60 Hz  
**Power supply cable length** 1500 mm


## Optional accessories

Charcoal filter

KITFC900 - KITFC999

Chimney extension

KITCMNKAT

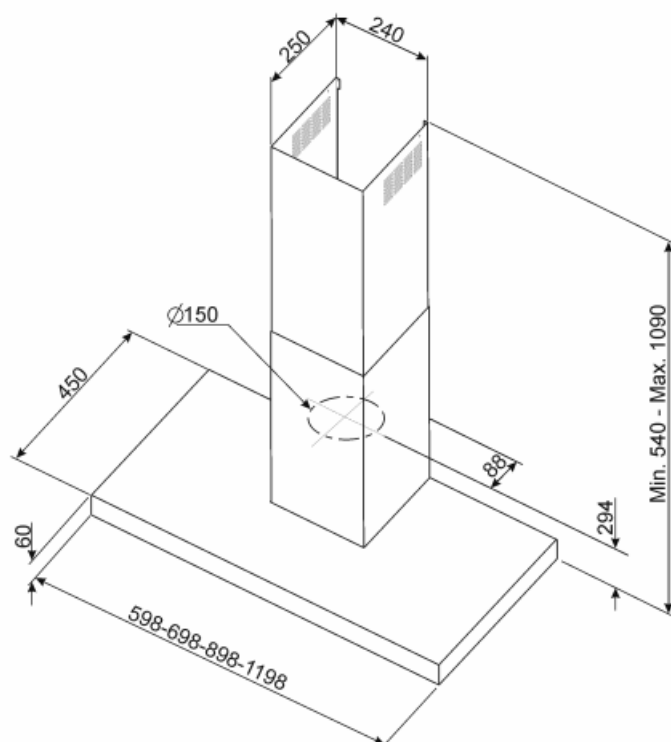

---

## Not included accessories

---



### KITFC900

Charcoal filter Kit 1 piece high performances washable



### KITFC999

Charcoal filter Kit 1 piece



### KITCMNKAT

Chimney extension dimension 241 \* 231 \* 810 T-shape hood KAT & KATE Stainless Steel

---

## Symbols glossary (TT)

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**C:** Product energy rating



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.