

KATE900CEX

Product family Hood

Hood Type Decorative wall hood

DesignT flatExtractionExtractionMaterialStainless steelType of steelBrushed

EAN code 8017709255060

Hood width 90 cm



150 mm

Aesthetics

AestheticUniversaleSerigraphy colourBlackColourStainless steelLogoSilk screen

Finishing Satin

Controls

Control setting Buttons

Technical Features



No. of lights2Anti-grease filtersAluminiumLight typeLEDCharcoal filters includedYesLight Power2.5 WFilter replacementYes

Light color temperature 3500 °K indicator

scale (°K)

Free outlet maximum 612 m³/h Minimum distance from 650 mm

capacity GAS hob

Motor power 175 W Minimum distance from 500 mm

No. of filters 3 ELECTRIC hob

Non return valve Yes

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2- 13 [dBA] |
|------------|-------------------------------------|--------------------------------------|
| Speed 1 | 241 | 46 |

SMEG SPA 2024/12/26

Vent outlet



| Speed 2 | 370 | 56 |
|------------|-----|----|
| Speed 3 | 590 | 68 |

Performance / Energy Label

| / | A: |
|----|----|
| Κ. | T. |
| | |

77 kWh/a Airbourne acouistical A- 47 dBA **Annual Efficiency** Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class C speed (SPEmin) (EEC) Airborne acoustical A-68 dBA Fluid Dynamic Efficiency 20,2 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency C speed (SPEmax) class (FDEC) Time increase factor (F) 1.3 Lighting Efficiency (LE) 76,1 lux/W Measured air flow rate 336 m³/h Lighting Efficiency Class A at best efficiency point (LEC) (Qbep) **Grease Filtering** 76 % Measured air pressure 334 Pa Efficiency (GFE) at best efficiency point **Grease Filtering** (Pbep) Efficiency Class (GFEC) Measured electric 155 W Air flow at minumum 240 m³/h power input at best speed (Qmin) efficiency point (Wbep) Air flow at maximum 581 m³/h **Nominal Power** 5 W speed (Qmax) consumption of the light system (WL) Average illumination of 381 lux the light on the cooking surface (Emiddle)

Electrical Connection

Plug Not present Frequency (Hz) 50-60 Hz
Electrical connection 180 W Power supply cable 1500 mm rating length

220-240 V

Sound power level at

highest setting (Lwa)


68 dBA

Optional accessories

Voltage

Chimney extension KITCMNKAT



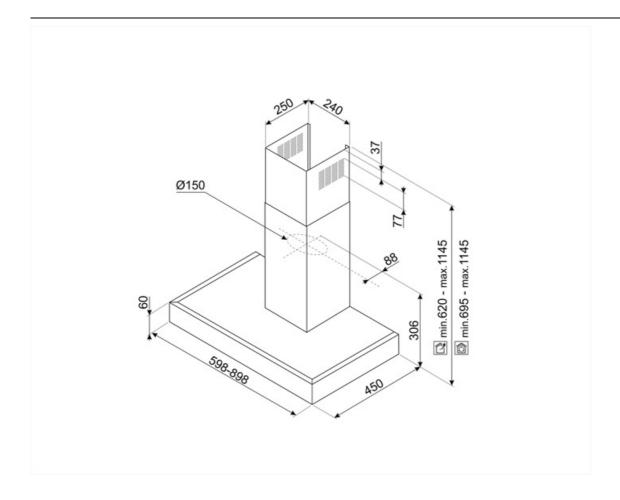



Not included accessories



KITFC900

Charcoal filter Kit 1 piece high perfrmances washable



KITCMNKAT

Chimney extension dimension 241 * 231 * 810 T-shape hood KAT & KATE Stainless Steel



Charcoal filter Kit 1 piece



Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.