

KATE900EX

Product family Hood

Hood Type Chimney Cooker Hoods

Design

Extraction Ducted out or re-circulation possible

Material Stainless steel

Type of steel Brushed

8017709235147 **EAN** code

Hood width 90 cm **Aesthetics** Universal Colour Stainless steel **Finishing** Brushed Serigraphy colour Black Logo Silk screen



Controls

Control setting **Buttons**

Program / Functions

No. of speeds 3

Technical Features





2 No. of filters No. of lights

Aluminium Light type LED **Anti-grease filters** 150 mm Light power 2.5 W Vent outlet Minimum distance from Light colour 3500 K 650 mm **GAS** hob

temperature scale (K)

Free outlet maximum 612 m³/h Minimum distance from 500 mm

ELECTRIC hob capacity

Motor power 175 W Non return valve Yes

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2- 13 [dBA] |
|------------|-------------------------------------|--------------------------------------|
| Speed 1 | 241 | 46 |
| Speed 2 | 370 | 56 |



| Speed 3 | 590 | 67 |
|------------|-----|----|
|------------|-----|----|

Performance / Energy Label

Annual Efficiency 77 kWh/year Airbourne acouistical A- 47 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficiency class (C speed (SPEmin) EEC) Airborne acoustical A-68 dBA Fluid Dynamic Efficiency 20.2 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency C speed (SPEmax) class (FDEC) Time increase factor (F) Lighting Efficiency (LE) 76.1 lux/W Measured air flow rate 336 m³/h Lighting Efficiency Class A at best efficiency point (LEC) (Qbep) **Grease Filtering** 76 % Measured air pressure 334 Pa Efficiency (GFE) at best efficiency point **Grease Filtering** С (Qbep) Efficiency Class (GFEC) Measured electric 155 W Air flow at minumum 240 m³/h power input at best speed (Qmin) efficiency point (Wbep) Maximum extraction 581 m³/h Normal Power of the 5 W rate light system (WI) Average illumination of 381 lux the light on the cooking surface (Emiddle) Sound power level at 68 dBA

Electrical Connection


Nominal power 180 W Frequency (Hz) 50-60 Hz Voltage 220-240 V Power supply cable 1500 mm length

highest setting (Lwa)

Optional accessories

Charcoal filter KITFC900 - KITFC999 Chimney extension KITCMNKAT



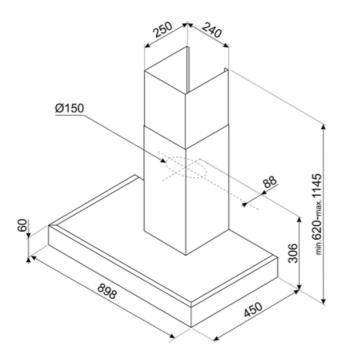



Compatible Accessories



KITCMNKAT

Chimney extension dimension 241 * 231 * 810 T-shape hood KAT & KATE Stainless Steel



KITFC900

Charcoal filter Kit 1 piece high perfrmances washable



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.