

# KATE900EX

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709235147
Hood width	90 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Serigraphy colour	Black
Logo	Silk screen



## Controls

Control setting	Buttons
-----------------	---------

## Program / Functions

No. of speeds	3
---------------	---

## Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light Power	2,5 W	Vent outlet	150 mm
Light color temperature scale (K)	3500 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	612 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	500 mm
Motor power	175 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	241	46
Speed 2	370	56

Speed 3	590	67
---------	-----	----

## Performance / Energy Label


		
<b>Annual Efficiency Consumption (AEChood)</b>	77 kWh/a	Airbourne acoustical A- weighted sound Power
<b>Energy efficiency class (EEC)</b>	C	Emission at minimum speed (SPEmin)
<b>Fluid Dynamic Efficiency (FDE)</b>	20,2	Airborne acoustical A- weighted sound Power
<b>Fluid Dynamic Efficiency class (FDEC)</b>	C	Emission at maximum speed (SPEmax)
<b>Lighting Efficiency (LE)</b>	76,1 lux/W	Time increase factor (F)
<b>Lighting Efficiency Class (LEC)</b>	A	Measured air flow rate at best efficiency point (Qbep)
<b>Grease Filtering Efficiency (GFE)</b>	76 %	Measured air pressure at best efficiency point (Pbep)
<b>Grease Filtering Efficiency Class (GFEC)</b>	C	Measured electric power input at best efficiency point (Wbep)
<b>Air flow at minimum speed (Qmin)</b>	240 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)
<b>Air flow at maximum speed (Qmax)</b>	581 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)
		Sound power level at highest setting (Lwa)

## Electrical Connection

<b>Electrical connection rating</b>	180 W	<b>Power supply cable length</b>	1500 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	Not present
<b>Frequency (Hz)</b>	50-60 Hz		

## Optional accessories

<b>Charcoal filter</b>	KITFC900 - KITFC999	<b>Chimney extension</b>	KITCMNKAT
------------------------	---------------------	--------------------------	-----------

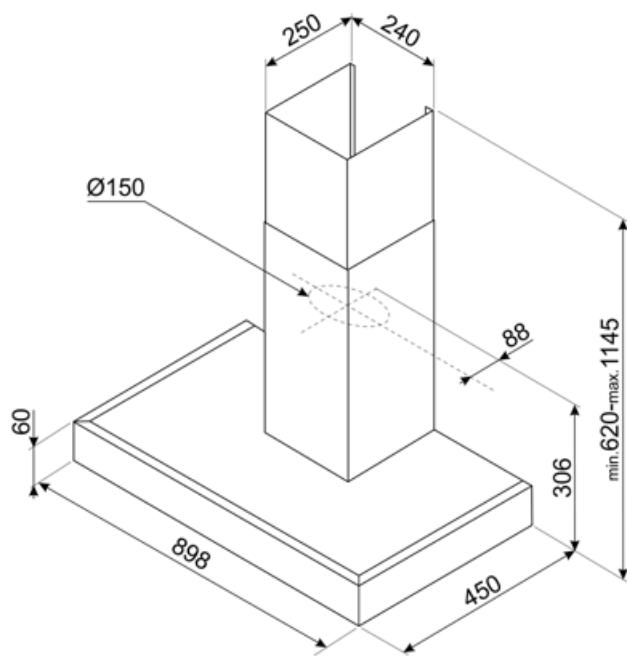

---

## Compatible Accessories

---



**KITCMNKAT**

Chimney extension dimension 241 \* 231  
\* 810 T-shape hood KAT & KATE  
Stainless Steel



**KITFC900**

Charcoal filter. Kit 1 piece. High performances. Regenerable. To be washed after 3 months of use with hot water. To be changed after 3 years of use.

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

