

# KATE900EX

Product family Hood

Hood Type Decorative wall hood

Design T flat
Extraction Extraction
Material Stainless steel
Type of steel Brushed

**EAN code** 8017709235147

Hood width 90 cm
Aesthetic Universale
Colour Stainless steel

Finishing Satin
Serigraphy colour Black
Logo Silk screen



### **Controls**

Control setting Buttons

## **Program / Functions**

No. of speeds 3

### **Technical Features**





No. of lights 2 No. of filters 3

Light typeLEDAnti-grease filtersAluminiumLight Power2.5 WVent outlet150 mmLight color temperature3500 KMinimum distance from650 mm

scale (K) GAS hob

Free outlet maximum 612 m³/h Minimum distance from 500 mm

capacity ELECTRIC hob

Motor power 175 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	241	46
Speed 2	370	56



Speed 3	590	67
------------	-----	----

### Performance / Energy Label

**Annual Efficiency** 77 kWh/a Airbourne acouistical A- 47 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class C speed (SPEmin) (EEC) Airborne acoustical A-Fluid Dynamic Efficiency 20.2

weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency C speed (SPEmax) class (FDEC)

Time increase factor (F) Lighting Efficiency (LE) 76.1 lux/W Measured air flow rate 336 m<sup>3</sup>/h Lighting Efficiency Class A

at best efficiency point (LEC) (Qbep) **Grease Filtering** 76 %

Efficiency (GFE) **Grease Filtering** С Efficiency Class (GFEC)

Air flow at minumum 240 m<sup>3</sup>/h

speed (Qmin)

Air flow at maximum 581 m<sup>3</sup>/h speed (Qmax)

efficiency point (Wbep) **Nominal Power** 

(Pbep)

5 W consumption of the light system (WL)

68 dBA

334 Pa

155 W

381 lux

Average illumination of the light on the cooking

Measured air pressure

at best efficiency point

Measured electric

power input at best

surface (Emiddle) Sound power level at 68 dBA highest setting (Lwa)

**Electrical Connection** 


**Electrical connection** 180 W Power supply cable 1500 mm length rating

220-240 V Plug Voltage Not present Frequency (Hz) 50-60 Hz

Optional accessories

**Charcoal filter** KITFC900 - KITFC999 Chimney extension **KITCMNKAT** 



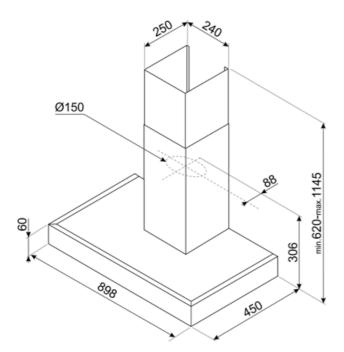



## **Compatible Accessories**



#### **KITCMNKAT**

Chimney extension dimension 241 \* 231 \* 810 T-shape hood KAT & KATE Stainless Steel



#### KITFC900

Charcoal filter. Kit 1 piece. High performances. Regenerable. To be whased after 3 months of use with hot water. To be changed after 3 years of use.



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.