

KBCT900XE

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709287856
Hood width	90 cm






Aesthetics

Aesthetic	Universale	Finishing	Satin
Colour	Stainless steel	Logo	Silk screen



Controls

Control setting	Electronic buttons
-----------------	--------------------

Programme / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	

Technical Features

				No. of lights	2	Anti-grease filters	Aluminium
				Light type	LED	Charcoal filters included	Yes
				Light Power	1.3 W	Filter replacement indicator	Yes
				Light color temperature scale (°K)	3000 °K	Vent outlet	150 mm
						Minimum distance from GAS hob	650 mm

Free outlet maximum capacity 730 m³/h

Motor power 230 W

No. of filters 3

Minimum distance from ELECTRIC hob 500 mm

Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	265	47
Speed 2	360	55
Speed 3	480	62
Intensive speed	713	72

Accessories Included

Tube reduction Yes

Performance / Energy Label

A

Annual Efficiency Consumption (AEChood) 54 kWh/a

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 31,2

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 60,0 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 76,5 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at mininum speed (Qmin) 265 m³/h

Air flow at maximum speed (Qmax) 480 m³/h

Air flow at boost speed (Qboost) 713 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 46 dB(A)

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 62 dB(A)

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 71 dB(A)

Power consumption in stand-by mode (Ps) 0,22 W

Time increase factor (F) 0,9

Energy Efficiency Index 52,0

Measured air flow rate at best efficiency point (Qbep) 395 m³/h

Measured air pressure at best efficiency point (Pbep) 451 Pa

Measured electric power input at best efficiency point (Wbep) 159 W


Nominal Power consumption of the light system (WL) 3 W

Average illumination of the light on the cooking surface (Emiddle) 156 lux


Sound power level at highest setting (Lwa) 62 dB(A)

Electrical Connection

Electrical connection rating	230 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm

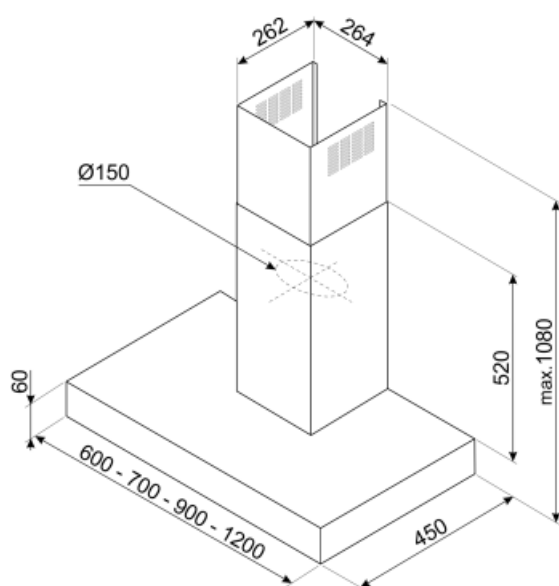


Not included accessories



KITFCKBT

1 pcs di filtro a carboni attivi per i modelli di cappe KBT* / KBCT*



KITFCKBTR

1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models.
* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm



KITCEKBT

Chimney extension, dimensions 261,5 * 260 * 830 mm suitable for T-shape hood KBT* & KBCT*, max hight 1380 mm Stainless Steel

Symbols glossary (TT)



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.