

# KBT1200XE

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709286637
Hood width	120 cm






## Aesthetics

Aesthetics	Universal	Finishing	Brushed
Colour	Stainless steel	Logo	Silk screen




## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	

## Technical Features

  			
No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light power	1.3 W	Vent outlet	150 mm
Light colour temperature scale (°K)	3000 °K	Minimum distance from GAS hob	650 mm

<b>Free outlet maximum capacity</b>	610 m <sup>3</sup> /h	<b>Minimum distance from ELECTRIC hob</b>	650 mm
<b>Motor power</b>	230 W	<b>Non return valve</b>	Yes
<b>No. of filters</b>	4		

	<b>Extraction rate IEC 61591 [m<sup>3</sup>/h]</b>	<b>Noise level IEC 60704-2-13 [dBA]</b>
Speed 1	251	48
Speed 2	345	56
Speed 3	454	62
Intensive speed	690	72

## Accessories Included

<b>Tube reduction</b>	Yes
-----------------------	-----


## Performance / Energy Label



<b>Annual Efficiency Consumption (AEChood)</b>	55 kWh/year	<b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>	61 dBA
<b>Energy efficiency class (EEC)</b>	A	<b>Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)</b>	71 dBA
<b>Fluid Dynamic Efficiency (FDE)</b>	30,2	<b>Power consumption in stand-by mode (Ps)</b>	0,23 W
<b>Fluid Dynamic Efficiency class (FDEC)</b>	A	<b>Time increase factor (F)</b>	0,9
<b>Lighting Efficiency (LE)</b>	58,8 lux/W	<b>Energy Efficiency Index per first cavity</b>	52,1
<b>Lighting Efficiency Class (LEC)</b>	A	<b>Measured air flow rate at best efficiency point (Qbep)</b>	387 m <sup>3</sup> /h
<b>Grease Filtering Efficiency (GFE)</b>	79,6 %	<b>Measured air pressure at best efficiency point (Qbep)</b>	452 Pa
<b>Grease Filtering Efficiency Class (GFEC)</b>	C	<b>Measured electric power input at best efficiency point (Wbep)</b>	161 W
<b>Air flow at mininum speed (Qmin)</b>	251 m <sup>3</sup> /h	<b>Normal Power of the light system (WI)</b>	3 W
<b>Maximum extraction rate</b>	454 m <sup>3</sup> /h	<b>Average illumination of the light on the cooking surface (Emiddle)</b>	153 lux
<b>Intensive extraction rate</b>	690 m <sup>3</sup> /h	<b>Sound power level at highest setting (Lwa)</b>	72 dBA
<b>Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)</b>	47 dBA		

## Electrical Connection

Nominal power	230 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

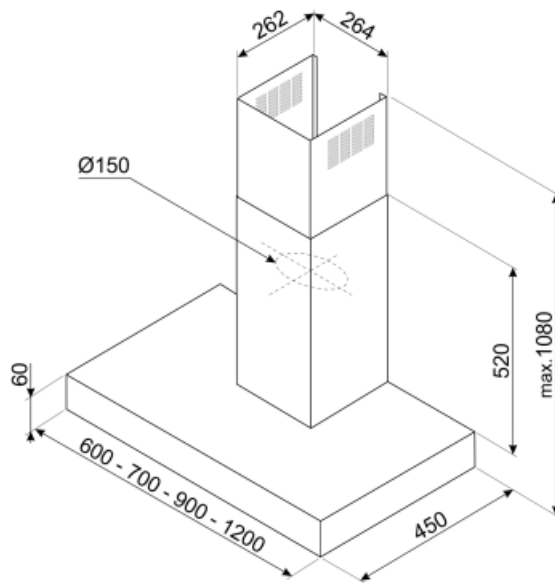

---


## Not included accessories

---



### KITFCKBT

1 pcs of activated carbon filter for hood models KBT\* / KBCT\*



### KITFCKBTR

1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models.  
\* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm










### KITCEKBT

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max hight 1380 mm Stainless Steel

---

## Symbols glossary

---

- |  |   |   |  |
|--|---|---|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | A: Product drying performance, measured from A+++ to D / G depending on the product family   |
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.   |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|  | Intensive/turbo setting: when extra fast extraction is required.  |   |  |