

KBT600BL

Product family Hood

Hood Type Decorative wall hood

Design T flat Extraction Extraction **Electronic control** Yes

Material Stainless steel 8017709347246 EAN code

Hood width 60 cm **Aesthetic** Universale Colour Black Silk screen Logo



Controls

Control setting Electronic buttons

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options







Technical Features







No. of lights 2 Light type LED **Light Power** 1,3 W 3000 K Light color temperature

scale (K)

Free outlet maximum 820 m³/h

capacity

230 W Motor power No. of filters 2

Anti-grease filters

Aluminium Filter replacement Yes indicator

Vent outlet Minimum distance from

GAS hob

Minimum distance from **ELECTRIC hob**

Non return valve

150 mm 650 mm

500 mm

Yes

SMEG SPA 10/12/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	260	49
Speed 2	358	57
Speed 3	473	64
Intensive speed	686	72

Accessories included

Tube reduction Yes

Performance / Energy Label

4		#***
/	0.0	D

Airbourne acouistical A- 48 dBA **Annual Efficiency** 53 kWh/a Consumption (AEChood) weighted sound Power Emission at minimum Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-Fluid Dynamic Efficiency 29,8 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 71 dBA Lighting Efficiency (LE) 70,4 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 79.7 % Time increase factor (F) 0,9 Efficiency (GFE) **Energy Efficiency Index Grease Filtering** Measured air flow rate Efficiency Class (GFEC) Air flow at minumum 261 m³/h (Qbep) speed (Qmin) Air flow at maximum 473 m³/h speed (Qmax) (Pbep) Air flow at boost speed 686 m³/h Measured electric (Qboost) power input at best **Nominal Power**

395 m³/h at best efficiency point Measured air pressure 451 Pa at best efficiency point 159 W efficiency point (Wbep) 3 W consumption of the light system (WL) Average illumination of 156 lux the light on the cooking surface (Emiddle) Sound power level at 70 dBA highest setting (Lwa)

64 dBA

52.0

Electrical Connection

SMEG SPA 10/12/2025



Electrical connection

230 W

rating

Voltage

Frequency (Hz)

220-240 V

50-60 Hz


Power supply cable

length

Plug

1500 mm

Not present

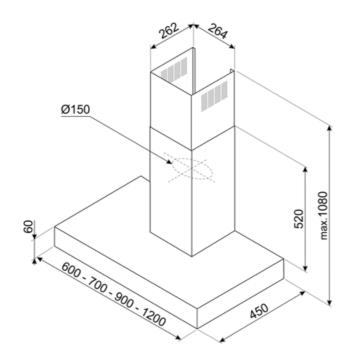

SMEG SPA 10/12/2025



Compatible Accessories

KITCEKBTBL



KITFCKBT

1 pc of charcoal filter for the hood models KBT* / KBCT*

KITFCKBTR



1 pcs of Charcoal filter Regenerable* suitable for all the KBT/KBCT models. * It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

SMEG SPA 10/12/2025



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 10/12/2025