

KBT600VE




Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709289713
Aesthetic	Universal
Colour	Aço inoxidável e vidro
Acabamento	Satin
Logotipo	Logotipo serigrafado



Controls

Control setting	Electronic buttons
-----------------	--------------------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features



Hood without motor	No	No. of filters	1
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	Yes
Light Power	1.3 W	Vent outlet	150 mm
Escala de temperatura de cor clara (°K)	3000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	730 m ³ /h		

Motor power	230 W	Minimum distance from ELECTRIC hob	500 mm
		Non return valve	Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	243	48
Speed 2	332	55
Speed 3	451	62
Intensive speed	677	71

Accessories Included

Remote control	No	Tube reduction	Yes
----------------	----	----------------	-----

Performance / Energy Label




Consumo anual de energía (CAE exaustor)	60 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	61 dBA
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency (FDE)	29.1	Power consumption in stand-by mode (Ps)	0.22 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1.0
Lighting Efficiency (LE)	68.5 lux/W	Energy Efficiency Index	57.4
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	433 m ³ /h
Grease Filtering Efficiency (GFE)	81.1 %	Measured air pressure at best efficiency point (Pbep)	451 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	158 W
Air flow at minimum speed (Qmin)	243 m ³ /h	Nominal Power consumption of the light system (WL)	3 W
Air flow at maximum speed (Qmax)	451 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	178 lux
Air flow at boost speed (Qboost)	677 m ³ /h	Sound power level at highest setting (Lwa)	62 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dBA		

Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	233 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

Optional accessories

Charcoal filter	No	Non return valve	No
Remote control	No	Kit with aesthetic components	No
Chimney extension	No	Diffuser kit	No
Vent outlet	No		

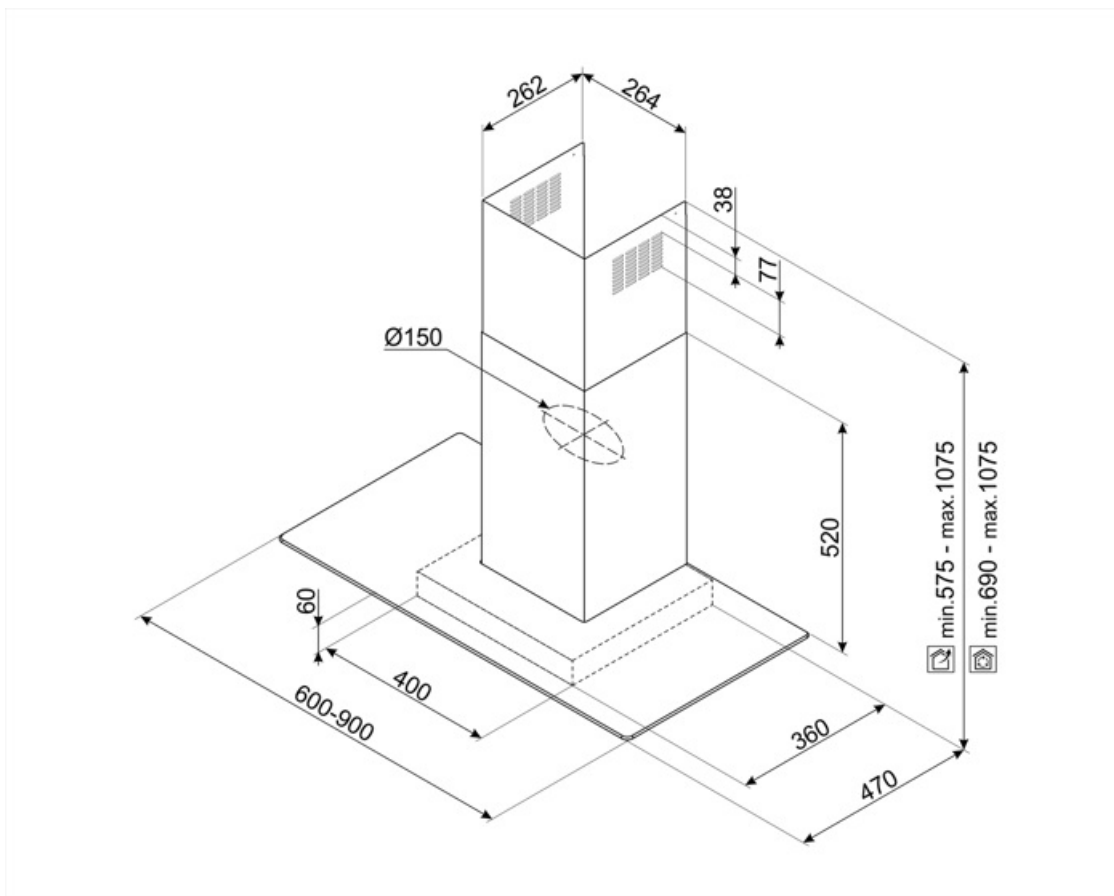


Compatible Accessories



KITCEKBT

Extensão da chaminé, dimensões 261,5 * 260 * 830 mm adequado para exaustor em forma de T KBT* e KBCT*, altura máxima 1380 mm de aço inoxidável



KITFCKBT








1 peça de filtro de carvões ativos para os modelos de exaustores KBT*/KBCT*



KITFCKBTR

1 pcs de filtro de carvão Regenerável* adequado para todos os modelos KBT*/KBCT. * Pode ser lavado na máquina lava-louça até 12 vezes e seco no forno a um máximo de 90° durante 60 min. dimensão 237,5(A)x245x10 mm

Symbols glossary

- | | | | |
|--|---|---|---|
|  | 24h: Quando selecionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível. |  | Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento. |
|  | Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente. |  | Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha. |
|  | Luz(s) de aviso: para avisar quando os filtros precisam ser trocados. |  | Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha. |
|  | Configuração intensiva/turbo: quando a extração extra rápida é necessária. | | |