

# KBT600XE

<b>Product family</b>	Hood
<b>Hood Type</b>	Chimney Cooker Hoods
<b>Design</b>	T flat
<b>Extraction</b>	Ducted out or re-circulation possible
<b>Electronic control</b>	Yes
<b>Material</b>	Stainless steel
<b>Type of steel</b>	Brushed
<b>EAN code</b>	8017709286613
<b>Hood width</b>	60 cm
<b>Aesthetics</b>	Universal
<b>Colour</b>	Stainless steel
<b>Finishing</b>	Brushed
<b>Logo</b>	Silk screen



## Controls

<b>Control setting</b>	Electronic buttons
------------------------	--------------------

## Program / Functions

<b>No. of speeds</b>	3
<b>Intensive speed</b>	
<b>24h air filter function</b>	
<b>Time-setting options</b>	

## Technical Features



<b>No. of lights</b>	2	<b>Anti-grease filters</b>	Aluminium
<b>Light type</b>	LED	<b>Filter replacement indicator</b>	Yes
<b>Light power</b>	1.3 W	<b>Vent outlet</b>	150 mm
<b>Light colour</b>	3000 K	<b>Minimum distance from GAS hob</b>	650 mm
<b>temperature scale (K)</b>		<b>Minimum distance from ELECTRIC hob</b>	500 mm
<b>Free outlet maximum capacity</b>	820 m³/h	<b>Non return valve</b>	Yes
<b>Motor power</b>	230 W		
<b>No. of filters</b>	2		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	260	49
Speed 2	358	57
Speed 3	473	64
Intensive speed	686	72

## Accessories Included

Tube reduction Yes

## Performance / Energy Label



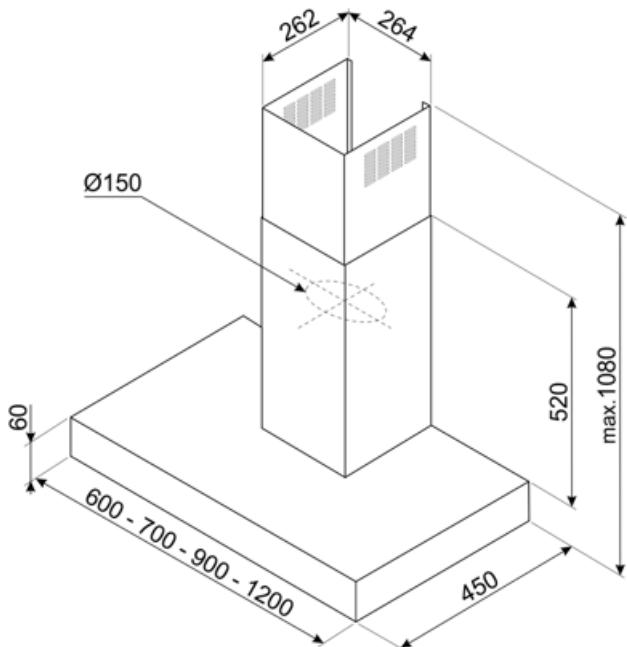
Annual Efficiency Consumption (AEChood)	53 kWh/year	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	48 dBA
Energy efficiency class ( A EEC)		Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Fluid Dynamic Efficiency (FDE)	29.8	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.9
Lighting Efficiency (LE)	70.4 lux/W	Energy Efficiency Index per first cavity	52.0
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	395 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	79.7 %	Measured air pressure at best efficiency point (Qbep)	451 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	159 W
Air flow at minimum speed (Qmin)	261 m <sup>3</sup> /h	Normal Power of the light system (WI)	3 W
Maximum extraction rate	473 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	156 lux
Intensive extraction rate	686 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	70 dBA

## Electrical Connection

Nominal power 230 W

---


<b>Voltage</b>	220-240 V	<b>Power supply cable length</b>	1500 mm
<b>Frequency (Hz)</b>	50-60 Hz		
		<b>Plug</b>	No




## Compatible Accessories

**KITCEKBT**

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max hight 1380 mm Stainless Steel

**KITFCKBT**

1 pcs of activated carbon filter for hood models KBT\* / KBCT\*

**KITFCKBTR**

1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.