

# KBT700XE

**Product family** Hood

**Hood Type** Chimney Cooker Hoods

Design

Extraction Ducted out or re-circulation possible

**Electronic control** Yes

Material Stainless steel Type of steel Brushed

EAN code 8017709286620

Hood width 70 cm **Aesthetics** Universal Colour Stainless steel **Finishing** Brushed Logo Silk screen



## **Controls**

Control setting **Electronic buttons** 

## **Program / Functions**

No. of speeds Intensive speed

24h air filter function

Time-setting options







## **Technical Features**







No. of lights 2 Light type LED Light power 1,3 W Light colour 3000 K

temperature scale (K)

Free outlet maximum 610 m<sup>3</sup>/h

capacity

230 W Motor power No. of filters 2

Anti-grease filters

Filter replacement Yes

indicator

Vent outlet Minimum distance from

**GAS** hob

Minimum distance from

**ELECTRIC hob** 

Non return valve

Aluminium

150 mm 650 mm

500 mm

Yes

**SMEG SPA** 14/12/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	256	48
Speed 2	347	55
Speed 3	463	63
Intensive speed	688	72

## **Accessories Included**

Tube reduction Yes

A F

## Performance / Energy Label

Ď.	
Annual Efficiency Consumption (AEChood)	54 kWh/year
Energy efficiency class ( EEC)	Α
Fluid Dynamic Efficiency (FDE)	29,2
Fluid Dynamic Efficiency class (FDEC)	Α
Lighting Efficiency (LE)	65,0 lux/W
Lighting Efficiency Class (LEC)	Α
Grease Filtering Efficiency (GFE)	79,8 %
Grease Filtering Efficiency Class (GFEC)	С

Air flow at minumum

Maximum extraction

speed (Qmin)

x/W 256 m<sup>3</sup>/h 463 m<sup>3</sup>/h Intensive extraction rate 688 m<sup>3</sup>/h

Airbourne acouistical A- 47 dBA weighted sound Power Emission at minimum speed (SPEmin) Airborne acoustical A-63 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 71 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) **Energy Efficiency Index** per first cavity Measured air flow rate 386 m<sup>3</sup>/h at best efficiency point (Qbep) Measured air pressure 428 Pa at best efficiency point (Qbep) Measured electric 157 W power input at best efficiency point (Wbep) Normal Power of the 3 W light system (WI) Average illumination of 157 lux the light on the cooking surface (Emiddle) Sound power level at 63 dBA highest setting (Lwa)

## **Electrical Connection**

Nominal power	230 W	Frequency (Hz)	50-60 Hz


**SMEG SPA** 14/12/2025



Voltage 220-240 V

Power supply cable length

1500 mm

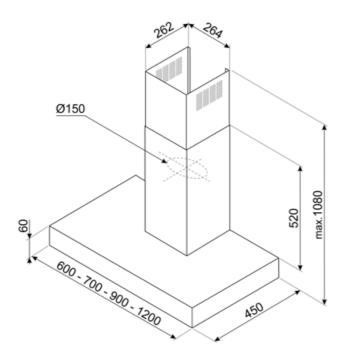

SMEG SPA 14/12/2025



# **Compatible Accessories**



### **KITCEKBT**

Chimney extension, dimensions 261,5 \* 260 \* 830 mm suitable for T-shape hood KBT\* & KBCT\*, max hight 1380 mm Stainless Steel



#### **KITFCKBT**

1 pcs of activated carbon filter for hood models KBT\* / KBCT\*

#### **KITFCKBTR**



1 pcs of Charcoal filter Regenerable\* suitable for all the KBT/KBCT models. \* It can be washed in the dishwasher up to 12 times and dry in the oven at max 90° for 60 min. dimension 237,5(H)x245x10 mm

SMEG SPA 14/12/2025



# Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 14/12/2025